



# Model VP Type L 3" and 4" Pellet Vent

Thru-the-Wall Pellet Stove Kits		Pellet Fireplace Insert Kits	
<p>The 3VP Thru-the-Wall Pellet Kit has the following:</p> <ul style="list-style-type: none"> <li>• 1 Horizontal Cap</li> <li>• 1 90° Elbow</li> <li>• 1 Wall Bracket</li> <li>• 5 One-foot Pipe Lengths</li> <li>• 1 Tee with Cleanout</li> <li>• 1 Wall Thimble</li> <li>• 1 Pipe Connector</li> </ul> <p>Product No. 283870    Part No. 3VP-KIT</p>		<p>The 3/4VP Thru-the-Wall Pellet Kit has the following:</p> <ul style="list-style-type: none"> <li>• 1 - 4" Horizontal Cap</li> <li>• 1 - 4" 90° Elbow</li> <li>• 1 - 4" Wall Bracket</li> <li>• 5 - 4" One-foot Pipe Lengths</li> <li>• 1 - 4" Tee with Cleanout</li> <li>• 1 - 4" Wall Thimble</li> <li>• 1 - 4" Tee Support</li> <li>• 1 - 3" to 4" Pellet Increaser</li> <li>• 1 - 4" Pipe Connector</li> <li>• 1 - 3" Pipe Connector</li> </ul> <p>Product No. 284875    Part No. 3/4VP-KIT</p>	
<p>The 4" Pellet Vent Flex Kit has the following:</p> <ul style="list-style-type: none"> <li>• 35' of 4" diameter stainless flex</li> <li>• 4" flex termination</li> <li>• 4" flex flashing adapter</li> <li>• 4" flex flashing</li> <li>• 3" - 4" Pellet Increaser</li> <li>• 3" Pellet Tee</li> <li>• 3" Pellet Pipe Connector</li> <li>• Silicone sealant</li> </ul> <p>Product No. 284865    Part No. 4VP-35IK</p>		<p>The 3" Pellet Vent Flex Kit has the following:</p> <ul style="list-style-type: none"> <li>• 25' of 3" diameter stainless flex</li> <li>• 3" flex termination</li> <li>• 3" flex flashing adapter</li> <li>• 3" flex flashing</li> <li>• 3" Pellet Tee</li> <li>• 3" Pellet Pipe Connector</li> <li>• Silicone sealant</li> </ul> <p>Product No. 283865    Part No. 3VP-25IK</p>	

### Through the Ceiling Top Vent




### Through the Wall Rear Vent




The following illustrations detail the most common types of Model VP installations and the variety of parts required.

### Horizontal Exit Termination



### Through the Ceiling Rear Vent

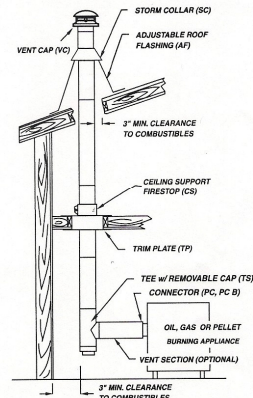

- Maintain Minimum 3" Airspace Clearance to combustibles
- In unoccupied attics, it is very important to be sure that blown-in or other insulation does not come in contact with the vent system. However, it need only be finished well enough to keep insulation and stored furnishings away from vent systems.
- Model VP has been listed for use with high temperature silicon sealant applied to the male end and seams of the vent section just prior to installation. This sealant in conjunction with the rope gasket, further reduces air infiltration. Minimizing accumulation of powder.
- Vent systems incorporating tee sections, 90 degree elbows and/or tall heights are most susceptible to the powder accumulation and should be inspected and cleaned more frequently.
- Use only high temperature sealants
- Termination minimum of 4' to any opening in the home.