



Air Conditioning & Heating

SSZ14

HIGH-EFFICIENCY, R-410A SPLIT SYSTEM HEAT PUMP

COOLING CAPACITY: 18,000 TO 57,600 BTU/H
HEATING CAPACITY: 18,000 TO 59,000 BTU/H

UP TO 15 SEER
UP TO 8.5 HSPF

Standard Features

- R-410A chlorine-free refrigerant
- High-efficiency scroll compressor
- High density foam compressor sound blanket
- SmartShift™ technology to ensure quiet reliable defrost
- Factory-installed bi-flow liquid line filter dryer
- Factory-installed suction line accumulator
- Factory-installed compressor crankcase heater
- Factory-installed high capacity muffler
- High- and low-pressure switches
- Service valves with sweat connections and easy access to gauge ports
- Copper tube/enhanced aluminum fin coil
- Fully charged for 15' of tubing length
- Contactor with lug connection
- Ground lug connection
- AHRI Certified; ETL Listed

Cabinet Features

- Goodman brand sound control top design
- Steel louver coil guard
- Heavy-gauge galvanized-steel cabinet
- Attractive Architectural Gray powder-paint finish with 500-hour salt-spray approval
- Top and side maintenance access
- Service ports and controls are accessible while unit is operating
- When properly anchored, meets the 2001 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



Contents

| | |
|-------------------------------|----|
| Nomenclature..... | 2 |
| Product Specifications..... | 3 |
| Expanded Cooling Data..... | 4 |
| Expanded Heating Data..... | 20 |
| AHRI Performance Ratings..... | 22 |
| Dimensions..... | 33 |
| Wiring Diagram..... | 34 |
| Accessories..... | 36 |



* Complete warranty details available from your local dealer or at www.goodmanmfg.com. To receive the Lifetime Compressor Limited Warranty (good for as long as you own your home) and 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Québec.

** The Best Buy Seal is a registered trademark of Consumers Digest Communications, LLC, used under license.



NOMENCLATURE

| | S | S | Z | 14 | 036 | 1 | A | A | | |
|---|--|---|--------------------------------------|-----|------------------|---|--------------------|---------------------------|-----|--|
| | 1 | 2 | 3 | 4,5 | 6,7,8 | 9 | 10 | 11 | | |
| Brand | G Goodman® (Standard Feature Set Models) | | S Goodman® (High Feature Set Models) | | | | | | | Engineering * Minor Revision |
| Product Category | S Split System | | | | | | | | | Engineering * Major Revision |
| Unit Type | C Condenser R-22 | | X Condenser R-410A | | H Heat Pump R-22 | | Z Heat Pump R-410A | | | Electrical |
| | | | | | | | 1 | 208/230 V, 1 Phase, 60 Hz | | |
| | | | | | | | 2 | 220/240 V, 1 Phase, 50 Hz | | |
| | | | | | | | 3 | 208/230 V, 3 Phase, 60 Hz | | |
| | | | | | | | 4 | 460 V, 3 Phase, 60 Hz | | |
| | | | | | | | 5 | 380/415 V, 3 Phase, 50 Hz | | |
| Efficiency | | | | | | | | | | Nominal Capacity |
| 13 | 13 SEER | | | | | | 018 | 1½ Tons | 048 | 4 Tons |
| 14 | 14 SEER | | | | | | 024 | 2 Tons | 060 | 5 Tons |
| 16 | 16 SEER | | | | | | 030 | 2½ Tons | 090 | 7½ tons |
| | | | | | | | 036 | 3 Tons | 120 | 10 Tons |
| | | | | | | | 042 | 3½ Tons | | |
| * Neither used for order entry or inventory management. | | | | | | | | | | |

Important EnergyStar Notice: EnergyStar ratings are dependent upon conditions beyond equipment installation. Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet EnergyStar criteria. Ask your contractor for details or visit www.energystar.gov.

SPECIFICATIONS

| | SSZ14 0181A | SSZ14 0241A | SSZ14 0301A | SSZ14 0361A | SSZ14 0361B | SSZ14 0421A | SSZ14 0481A | SSZ14 0601A |
|--|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
| NOMINAL CAPACITIES | | | | | | | | |
| Cooling (BTU/h) | 18,000 | 24,000 | 28,800 | 35,000 | 35,000 | 40,000 | 46,000 | 57,000 |
| Heating (BTU/h) | 18,000 | 24,000 | 29,000 | 35,000 | 33,000 | 41,000 | 47,000 | 58,000 |
| Decibels | 70 | 72 | 72 | 73 | 74 | 73 | 74 | 75 |
| COMPRESSOR | | | | | | | | |
| RLA | 9.0 | 12.8 | 14.1 | 16.7 | 14.1 | 17.9 | 19.9 | 26.4 |
| LRA | 48.0 | 58.3 | 73.0 | 79.0 | 77.0 | 112.0 | 109.0 | 134.0 |
| CONDENSER FAN MOTOR | | | | | | | | |
| Horsepower | 1/12 | 1/6 | 1/6 | ¼ | ¼ | ¼ | ¼ | ¼ |
| FLA | 0.6 | 1.1 | 1.0 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 |
| REFRIGERATION SYSTEM | | | | | | | | |
| Refrigerant Line Size ¹ | | | | | | | | |
| Liquid Line Size ("O.D.) | ⅜" | ⅜" | ⅜" | ⅜" | ⅜" | ⅜" | ⅜" | ⅜" |
| Suction Line Size ("O.D.) | ¾" | ¾" | ¾" | ⅞" | ⅞" | 1⅛" | 1⅛" | 1⅛" |
| Refrigerant Connection Size | | | | | | | | |
| Liquid Valve Size ("O.D.) | ⅜" | ⅜" | ⅜" | ⅜" | ⅜" | ⅜" | ⅜" | ⅜" |
| Suction Valve Size ("O.D.) | ¾" | ¾" | ¾" | ⅞" | ¾" | ⅞" | ⅞" | ⅞" |
| Valve Connection Type | Sweat | Sweat | Sweat | Sweat | Sweat | Sweat | Sweat | Sweat |
| Refrigerant Charge | 140 | 160 | 185 | 210 | 186 | 210 | 270 | 275 |
| ELECTRICAL DATA | | | | | | | | |
| Volts / Hz / Phase | 208/230-60-1 | | 208/230-60-1 | | 208/230-60-1 | | 208/230-60-1 | |
| Minimum Circuit Ampacity ² | 11.9 | 17.1 | 18.6 | 22.4 | 19.1 | 23.9 | 26.4 | 34.5 |
| Max. Overcurrent Protection ³ | 20 | 25 | 30 | 35 | 30 | 40 | 45 | 60 |
| Min / Max Volts | 197 / 253 | 197 / 253 | 197 / 253 | 197 / 253 | 197 / 253 | 197 / 253 | 197 / 253 | 197 / 253 |
| Electrical Conduit Size | ½" or ¾" | ½" or ¾" | ½" or ¾" | ½" or ¾" | ½" or ¾" | ½" or ¾" | ½" or ¾" | ½" or ¾" |
| SHIP WEIGHT (LBS) | 199 | 207 | 219 | 242 | 215 | 242 | 266 | 280 |

¹ Tested and rated in accordance with AHRI Standard 210/240

² Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

³ Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

NOTES

- Always check the rating plate for electrical data on the unit being installed.
- Installer will need to supply ⅞" to 1⅛" adapters for suction line connections.
- Unit is charged with refrigerant for 15' of ⅜" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.
- Installation of these units requires the specified TXV Kit to be installed on the indoor coil. THE SPECIFIED TXV IS DETERMINED BY THE OUTDOOR UNIT NOT THE INDOOR COIL.

EXPANDED COOLING DATA — SSZ140181A* / CA*F3131*6A* +TXV / MBR800***-1

| IDB | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----|---------|-----------------------------|-------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|-------|------|------|------|-------|------|------|------|------|------|
| | | 65°F | | | | 75°F | | | | 85°F | | | | 95°F | | | | 105°F | | | | 115°F | | | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | | |
| 70 | 675 | MBh | 17.6 | 18.3 | 20.0 | - | 17.2 | 17.9 | 19.6 | - | 16.8 | 17.4 | 19.1 | - | 16.4 | 17.0 | 18.6 | - | 15.6 | 16.2 | 17.7 | - | 14.4 | 15.0 | 16.4 | - | |
| | | S/T | 0.74 | 0.62 | 0.43 | - | 0.76 | 0.64 | 0.44 | - | 0.78 | 0.65 | 0.45 | - | 0.81 | 0.67 | 0.47 | - | 0.84 | 0.70 | 0.49 | - | 0.85 | 0.71 | 0.49 | - | |
| | | ΔT | 18 | 15 | 12 | - | 18 | 16 | 12 | - | 18 | 16 | 12 | - | 18 | 16 | 12 | - | 18 | 15 | 12 | - | 17 | 14 | 11 | - | |
| | 600 | KW | 1.17 | 1.19 | 1.23 | - | 1.25 | 1.28 | 1.32 | - | 1.33 | 1.36 | 1.40 | - | 1.40 | 1.43 | 1.47 | - | 1.45 | 1.48 | 1.53 | - | 1.50 | 1.53 | 1.58 | - | |
| | | Amps | 4.2 | 4.3 | 4.4 | - | 4.5 | 4.6 | 4.8 | - | 4.9 | 5.0 | 5.2 | - | 5.3 | 5.4 | 5.6 | - | 5.6 | 5.7 | 5.9 | - | 5.9 | 6.1 | 6.3 | - | |
| | | Hi/PR | 213 | 229 | 242 | - | 239 | 257 | 271 | - | 271 | 292 | 308 | - | 309 | 333 | 351 | - | 348 | 374 | 395 | - | 384 | 413 | 436 | - | |
| | 525 | Lo/PR | 107 | 113 | 124 | - | 113 | 120 | 131 | - | 117 | 124 | 136 | - | 123 | 131 | 143 | - | 129 | 137 | 150 | - | 133 | 142 | 155 | - | |
| | | MBh | 17.1 | 17.7 | 19.4 | - | 16.7 | 17.3 | 19.0 | - | 16.3 | 16.9 | 18.5 | - | 15.9 | 16.5 | 18.1 | - | 15.1 | 15.7 | 17.2 | - | 14.0 | 14.5 | 15.9 | - | |
| | | S/T | 0.70 | 0.59 | 0.41 | - | 0.73 | 0.61 | 0.42 | - | 0.75 | 0.62 | 0.43 | - | 0.77 | 0.64 | 0.45 | - | 0.80 | 0.67 | 0.46 | - | 0.81 | 0.67 | 0.47 | - | |
| | 75 | 675 | ΔT | 18 | 16 | 12 | - | 19 | 16 | 12 | - | 19 | 16 | 12 | - | 19 | 16 | 12 | - | 19 | 16 | 12 | - | 17 | 15 | 11 | - |
| | | | KW | 1.16 | 1.18 | 1.22 | - | 1.24 | 1.27 | 1.31 | - | 1.32 | 1.35 | 1.39 | - | 1.38 | 1.41 | 1.46 | - | 1.44 | 1.47 | 1.52 | - | 1.49 | 1.52 | 1.57 | - |
| | | | Amps | 4.2 | 4.3 | 4.4 | - | 4.5 | 4.6 | 4.8 | - | 4.9 | 5.0 | 5.2 | - | 5.2 | 5.3 | 5.5 | - | 5.5 | 5.7 | 5.9 | - | 5.9 | 6.0 | 6.2 | - |
| 600 | | Hi/PR | 210 | 227 | 239 | - | 236 | 254 | 268 | - | 269 | 289 | 305 | - | 306 | 329 | 348 | - | 344 | 370 | 391 | - | 380 | 409 | 432 | - | |
| | | Lo/PR | 105 | 112 | 122 | - | 111 | 119 | 129 | - | 116 | 123 | 134 | - | 122 | 129 | 141 | - | 127 | 136 | 148 | - | 132 | 140 | 153 | - | |
| | | MBh | 15.8 | 16.4 | 17.9 | - | 15.4 | 16.0 | 17.5 | - | 15.1 | 15.6 | 17.1 | - | 14.7 | 15.2 | 16.7 | - | 14.0 | 14.5 | 15.9 | - | 12.9 | 13.4 | 14.7 | - | |
| 525 | | S/T | 0.68 | 0.57 | 0.39 | - | 0.70 | 0.59 | 0.41 | - | 0.72 | 0.60 | 0.42 | - | 0.74 | 0.62 | 0.43 | - | 0.77 | 0.64 | 0.45 | - | 0.78 | 0.65 | 0.45 | - | |
| | | ΔT | 19 | 16 | 12 | - | 19 | 16 | 12 | - | 19 | 16 | 12 | - | 19 | 17 | 13 | - | 19 | 16 | 12 | - | 18 | 15 | 12 | - | |
| | | KW | 1.13 | 1.15 | 1.19 | - | 1.21 | 1.24 | 1.28 | - | 1.29 | 1.31 | 1.35 | - | 1.35 | 1.38 | 1.42 | - | 1.41 | 1.44 | 1.48 | - | 1.45 | 1.48 | 1.53 | - | |
| 70 | | 675 | Amps | 4.1 | 4.2 | 4.3 | - | 4.4 | 4.5 | 4.6 | - | 4.7 | 4.9 | 5.0 | - | 5.1 | 5.2 | 5.4 | - | 5.4 | 5.5 | 5.7 | - | 5.7 | 5.8 | 6.0 | - |
| | | | Hi/PR | 204 | 220 | 232 | - | 229 | 247 | 260 | - | 261 | 280 | 296 | - | 297 | 319 | 337 | - | 334 | 359 | 379 | - | 369 | 397 | 419 | - |
| | | | Lo/PR | 102 | 109 | 119 | - | 108 | 115 | 126 | - | 112 | 119 | 130 | - | 118 | 126 | 137 | - | 124 | 132 | 144 | - | 128 | 136 | 149 | - |
| | 600 | MBh | 17.9 | 18.5 | 20.0 | 21.5 | 17.5 | 18.0 | 19.5 | 21.0 | 17.1 | 17.6 | 19.1 | 20.5 | 16.7 | 17.2 | 18.6 | 20.0 | 15.9 | 16.3 | 17.7 | 19.0 | 14.7 | 15.1 | 16.4 | 17.6 | |
| | | S/T | 0.84 | 0.75 | 0.57 | 0.36 | 0.87 | 0.78 | 0.59 | 0.38 | 0.89 | 0.80 | 0.60 | 0.39 | 0.92 | 0.82 | 0.62 | 0.40 | 0.95 | 0.85 | 0.65 | 0.42 | 0.96 | 0.86 | 0.65 | 0.42 | |
| | | ΔT | 20 | 19 | 15 | 11 | 21 | 19 | 16 | 11 | 21 | 19 | 16 | 11 | 21 | 19 | 16 | 11 | 21 | 19 | 16 | 11 | 19 | 18 | 15 | 10 | |
| | 525 | KW | 1.18 | 1.20 | 1.24 | 1.27 | 1.26 | 1.29 | 1.33 | 1.37 | 1.34 | 1.37 | 1.41 | 1.46 | 1.41 | 1.44 | 1.48 | 1.53 | 1.46 | 1.50 | 1.54 | 1.59 | 1.51 | 1.55 | 1.60 | 1.65 | |
| | | Amps | 4.2 | 4.3 | 4.5 | 4.6 | 4.6 | 4.7 | 4.8 | 5.0 | 5.0 | 5.1 | 5.2 | 5.4 | 5.3 | 5.4 | 5.6 | 5.8 | 5.6 | 5.8 | 6.0 | 6.2 | 6.0 | 6.1 | 6.3 | 6.5 | |
| | | Hi/PR | 215 | 231 | 244 | 255 | 241 | 259 | 274 | 286 | 274 | 295 | 311 | 325 | 312 | 336 | 355 | 370 | 351 | 378 | 399 | 416 | 388 | 418 | 441 | 460 | |
| | 75 | 600 | Lo/PR | 108 | 114 | 125 | 133 | 114 | 121 | 132 | 141 | 118 | 126 | 137 | 146 | 124 | 132 | 144 | 154 | 130 | 138 | 151 | 161 | 135 | 143 | 156 | 166 |
| | | | MBh | 17.4 | 17.9 | 19.4 | 20.8 | 17.0 | 17.5 | 19.0 | 20.3 | 16.6 | 17.1 | 18.5 | 19.9 | 16.2 | 16.7 | 18.1 | 19.4 | 15.4 | 15.8 | 17.2 | 18.4 | 14.3 | 14.7 | 15.9 | 17.1 |
| | | | S/T | 0.80 | 0.71 | 0.54 | 0.35 | 0.83 | 0.74 | 0.56 | 0.36 | 0.85 | 0.76 | 0.57 | 0.37 | 0.88 | 0.78 | 0.59 | 0.38 | 0.91 | 0.81 | 0.62 | 0.40 | 0.92 | 0.82 | 0.62 | 0.40 |
| 525 | | ΔT | 21 | 20 | 16 | 11 | 22 | 20 | 16 | 11 | 22 | 20 | 16 | 11 | 22 | 20 | 16 | 11 | 21 | 20 | 16 | 11 | 20 | 18 | 15 | 10 | |
| | | KW | 1.17 | 1.19 | 1.23 | 1.26 | 1.25 | 1.28 | 1.32 | 1.36 | 1.33 | 1.36 | 1.40 | 1.44 | 1.40 | 1.43 | 1.47 | 1.52 | 1.45 | 1.48 | 1.53 | 1.58 | 1.50 | 1.53 | 1.58 | 1.64 | |
| | | Amps | 4.2 | 4.3 | 4.4 | 4.6 | 4.5 | 4.6 | 4.8 | 5.0 | 4.9 | 5.0 | 5.2 | 5.4 | 5.3 | 5.4 | 5.6 | 5.8 | 5.6 | 5.7 | 5.9 | 6.1 | 5.9 | 6.1 | 6.3 | 6.5 | |
| 675 | | Hi/PR | 213 | 229 | 242 | 252 | 239 | 257 | 271 | 283 | 271 | 292 | 308 | 322 | 309 | 333 | 351 | 366 | 348 | 374 | 395 | 412 | 384 | 413 | 437 | 455 | |
| | | Lo/PR | 107 | 113 | 124 | 132 | 113 | 120 | 131 | 139 | 117 | 124 | 136 | 145 | 123 | 131 | 143 | 152 | 129 | 137 | 150 | 159 | 133 | 142 | 155 | 165 | |
| | | MBh | 16.1 | 16.5 | 17.9 | 19.2 | 15.7 | 16.2 | 17.5 | 18.8 | 15.3 | 15.8 | 17.1 | 18.3 | 15.0 | 15.4 | 16.7 | 17.9 | 14.2 | 14.6 | 15.8 | 17.0 | 13.2 | 13.5 | 14.7 | 15.7 | |
| 525 | | S/T | 0.77 | 0.69 | 0.52 | 0.34 | 0.80 | 0.71 | 0.54 | 0.35 | 0.82 | 0.73 | 0.55 | 0.36 | 0.84 | 0.76 | 0.57 | 0.37 | 0.88 | 0.78 | 0.59 | 0.38 | 0.88 | 0.79 | 0.60 | 0.39 | |
| | | ΔT | 22 | 20 | 16 | 11 | 22 | 20 | 17 | 11 | 22 | 20 | 17 | 11 | 22 | 20 | 17 | 12 | 22 | 20 | 16 | 11 | 20 | 19 | 15 | 11 | |
| | | KW | 1.14 | 1.16 | 1.20 | 1.24 | 1.22 | 1.25 | 1.29 | 1.33 | 1.30 | 1.32 | 1.37 | 1.41 | 1.36 | 1.39 | 1.44 | 1.48 | 1.42 | 1.45 | 1.49 | 1.54 | 1.47 | 1.50 | 1.54 | 1.60 | |
| 675 | Amps | 4.1 | 4.2 | 4.3 | 4.5 | 4.4 | 4.5 | 4.7 | 4.8 | 4.8 | 4.9 | 5.1 | 5.2 | 5.1 | 5.2 | 5.4 | 5.6 | 5.4 | 5.6 | 5.7 | 6.0 | 5.7 | 5.9 | 6.1 | 6.3 | | |
| | Hi/PR | 206 | 222 | 234 | 244 | 231 | 249 | 263 | 274 | 263 | 283 | 299 | 312 | 300 | 323 | 341 | 355 | 337 | 363 | 383 | 400 | 373 | 401 | 423 | 442 | | |
| | Lo/PR | 103 | 110 | 120 | 128 | 109 | 116 | 127 | 135 | 113 | 121 | 132 | 140 | 119 | 127 | 138 | 147 | 125 | 133 | 145 | 155 | 129 | 137 | 150 | 160 | | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects ACCA (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

EXPANDED COOLING DATA — SSZ140181A* / CA*F3131*6A* +TXV / MBR800** -1 (CONT.)

| IDB | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | ENTERING INDOOR WET BULB TEMPERATURE | | | | | | | | | | | | |
|-------|---------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|--------------------------------------|------|------|------|-------|------|------|------|-------|------|------|------|------|
| | | 65°F | | | | 75°F | | | | 85°F | | | | 95°F | | | | 105°F | | | | 115°F | | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | |
| 80 | 675 | MBh | 18.3 | 18.7 | 19.9 | 21.3 | 17.8 | 18.2 | 19.5 | 20.8 | 17.4 | 17.8 | 19.0 | 20.3 | 17.0 | 17.4 | 18.5 | 19.8 | 16.1 | 16.5 | 17.6 | 18.8 | 14.9 | 15.3 | 16.3 | 17.4 |
| | | S/T | 0.92 | 0.86 | 0.70 | 0.52 | 0.95 | 0.89 | 0.73 | 0.54 | 1.00 | 0.92 | 0.75 | 0.56 | 1.00 | 0.94 | 0.77 | 0.57 | 1.00 | 1.00 | 0.80 | 0.60 | 1.00 | 1.00 | 0.80 | 0.60 |
| | ΔT | 23 | 22 | 19 | 15 | 23 | 22 | 19 | 15 | 23 | 22 | 19 | 15 | 23 | 22 | 19 | 16 | 22 | 22 | 19 | 15 | 20 | 21 | 18 | 14 | |
| | kW | 1.19 | 1.21 | 1.25 | 1.28 | 1.27 | 1.30 | 1.34 | 1.38 | 1.35 | 1.38 | 1.42 | 1.47 | 1.42 | 1.45 | 1.50 | 1.54 | 1.48 | 1.51 | 1.56 | 1.61 | 1.53 | 1.56 | 1.61 | 1.66 | |
| | Amps | 4.3 | 4.4 | 4.5 | 4.7 | 4.6 | 4.7 | 4.9 | 5.1 | 5.0 | 5.1 | 5.3 | 5.5 | 5.3 | 5.5 | 5.7 | 5.9 | 5.7 | 5.8 | 6.0 | 6.2 | 6.0 | 6.2 | 6.4 | 6.6 | |
| | Hi PR | 217 | 233 | 247 | 257 | 243 | 262 | 277 | 288 | 277 | 298 | 315 | 328 | 315 | 339 | 358 | 374 | 355 | 382 | 403 | 420 | 392 | 422 | 445 | 465 | |
| | Lo PR | 109 | 116 | 126 | 134 | 115 | 122 | 133 | 142 | 119 | 127 | 139 | 148 | 125 | 133 | 146 | 155 | 131 | 140 | 153 | 162 | 136 | 145 | 158 | 168 | |
| | MBh | 17.7 | 18.1 | 19.4 | 20.7 | 17.3 | 17.7 | 18.9 | 20.2 | 16.9 | 17.3 | 18.5 | 19.7 | 16.5 | 16.8 | 18.0 | 19.2 | 15.7 | 16.0 | 17.1 | 18.3 | 14.5 | 14.8 | 15.8 | 16.9 | |
| | S/T | 0.88 | 0.82 | 0.67 | 0.50 | 0.91 | 0.85 | 0.69 | 0.52 | 0.93 | 0.87 | 0.71 | 0.53 | 0.96 | 0.90 | 0.73 | 0.55 | 1.00 | 0.94 | 0.76 | 0.57 | 1.00 | 0.94 | 0.77 | 0.57 | |
| | ΔT | 24 | 23 | 20 | 16 | 24 | 23 | 20 | 16 | 24 | 23 | 20 | 16 | 24 | 23 | 20 | 16 | 24 | 23 | 20 | 16 | 22 | 21 | 19 | 15 | |
| | kW | 1.18 | 1.20 | 1.24 | 1.27 | 1.26 | 1.29 | 1.33 | 1.37 | 1.34 | 1.37 | 1.41 | 1.46 | 1.41 | 1.44 | 1.48 | 1.53 | 1.46 | 1.50 | 1.54 | 1.59 | 1.51 | 1.55 | 1.60 | 1.65 | |
| | Amps | 4.2 | 4.3 | 4.5 | 4.6 | 4.6 | 4.7 | 4.8 | 5.0 | 5.0 | 5.1 | 5.3 | 5.4 | 5.3 | 5.4 | 5.6 | 5.8 | 5.6 | 5.8 | 6.0 | 6.2 | 6.0 | 6.1 | 6.3 | 6.5 | |
| Hi PR | 215 | 231 | 244 | 255 | 241 | 259 | 274 | 286 | 274 | 295 | 311 | 325 | 312 | 336 | 355 | 370 | 351 | 378 | 399 | 416 | 388 | 418 | 441 | 460 | | |
| Lo PR | 108 | 114 | 125 | 133 | 114 | 121 | 132 | 141 | 118 | 126 | 137 | 146 | 124 | 132 | 144 | 154 | 130 | 138 | 151 | 161 | 135 | 143 | 156 | 166 | | |
| MBh | 16.4 | 16.7 | 17.9 | 19.1 | 16.0 | 16.3 | 17.4 | 18.6 | 15.6 | 15.9 | 17.0 | 18.2 | 15.2 | 15.6 | 16.6 | 17.8 | 14.5 | 14.8 | 15.8 | 16.9 | 13.4 | 13.7 | 14.6 | 15.6 | | |
| S/T | 0.84 | 0.79 | 0.64 | 0.48 | 0.88 | 0.82 | 0.67 | 0.50 | 0.90 | 0.84 | 0.69 | 0.51 | 0.93 | 0.87 | 0.71 | 0.53 | 0.96 | 0.90 | 0.73 | 0.55 | 0.97 | 0.91 | 0.74 | 0.55 | | |
| ΔT | 24 | 23 | 20 | 16 | 24 | 23 | 20 | 16 | 25 | 23 | 20 | 16 | 25 | 24 | 21 | 16 | 24 | 23 | 20 | 16 | 23 | 22 | 19 | 15 | | |
| kW | 1.15 | 1.17 | 1.21 | 1.24 | 1.23 | 1.26 | 1.30 | 1.34 | 1.31 | 1.34 | 1.38 | 1.42 | 1.37 | 1.40 | 1.45 | 1.49 | 1.43 | 1.46 | 1.51 | 1.56 | 1.48 | 1.51 | 1.56 | 1.61 | | |
| Amps | 4.1 | 4.2 | 4.4 | 4.5 | 4.5 | 4.6 | 4.7 | 4.9 | 4.8 | 4.9 | 5.1 | 5.3 | 5.2 | 5.3 | 5.5 | 5.7 | 5.5 | 5.6 | 5.8 | 6.0 | 5.8 | 5.9 | 6.1 | 6.4 | | |
| Hi PR | 208 | 224 | 237 | 247 | 234 | 252 | 266 | 277 | 266 | 286 | 302 | 315 | 303 | 326 | 344 | 359 | 341 | 367 | 387 | 404 | 376 | 405 | 428 | 446 | | |
| Lo PR | 104 | 111 | 121 | 129 | 110 | 117 | 128 | 136 | 115 | 122 | 133 | 142 | 120 | 128 | 140 | 149 | 126 | 134 | 147 | 156 | 131 | 139 | 152 | 161 | | |
| 85 | 675 | MBh | 18.6 | 18.9 | 19.8 | 21.2 | 18.1 | 18.5 | 19.4 | 20.7 | 17.7 | 18.1 | 18.9 | 20.2 | 17.3 | 17.6 | 18.4 | 19.7 | 16.4 | 16.7 | 17.5 | 18.7 | 15.2 | 15.5 | 16.2 | 17.3 |
| | | S/T | 0.96 | 0.93 | 0.84 | 0.68 | 1.00 | 0.96 | 0.87 | 0.71 | 1.00 | 0.99 | 0.89 | 0.72 | 1.00 | 1.00 | 0.92 | 0.75 | 1.00 | 1.00 | 0.95 | 0.77 | 1.00 | 1.00 | 0.96 | 0.78 |
| | ΔT | 24 | 24 | 23 | 20 | 25 | 24 | 23 | 20 | 24 | 24 | 23 | 20 | 24 | 24 | 23 | 20 | 22 | 23 | 23 | 20 | 21 | 21 | 21 | 18 | |
| | kW | 1.19 | 1.22 | 1.26 | 1.29 | 1.28 | 1.31 | 1.35 | 1.39 | 1.36 | 1.39 | 1.43 | 1.48 | 1.43 | 1.46 | 1.51 | 1.56 | 1.49 | 1.52 | 1.57 | 1.62 | 1.54 | 1.57 | 1.62 | 1.68 | |
| | Amps | 4.3 | 4.4 | 4.6 | 4.7 | 4.7 | 4.8 | 4.9 | 5.1 | 5.1 | 5.2 | 5.3 | 5.5 | 5.4 | 5.5 | 5.7 | 5.9 | 5.7 | 5.9 | 6.1 | 6.3 | 6.1 | 6.2 | 6.4 | 6.7 | |
| | Hi PR | 219 | 236 | 249 | 260 | 246 | 265 | 279 | 291 | 280 | 301 | 318 | 331 | 318 | 343 | 362 | 377 | 358 | 386 | 407 | 425 | 396 | 426 | 450 | 469 | |
| | Lo PR | 110 | 117 | 127 | 136 | 116 | 123 | 135 | 143 | 121 | 128 | 140 | 149 | 127 | 135 | 147 | 157 | 133 | 141 | 154 | 164 | 137 | 146 | 159 | 170 | |
| | MBh | 18.0 | 18.4 | 19.3 | 20.5 | 17.6 | 18.0 | 18.8 | 20.1 | 17.2 | 17.5 | 18.4 | 19.6 | 16.8 | 17.1 | 17.9 | 19.1 | 15.9 | 16.2 | 17.0 | 18.2 | 14.8 | 15.0 | 15.8 | 16.8 | |
| | S/T | 0.92 | 0.89 | 0.80 | 0.65 | 0.95 | 0.92 | 0.83 | 0.67 | 0.98 | 0.94 | 0.85 | 0.69 | 1.00 | 0.97 | 0.88 | 0.71 | 1.00 | 1.00 | 0.91 | 0.74 | 1.00 | 1.00 | 0.92 | 0.74 | |
| | ΔT | 25 | 25 | 24 | 20 | 26 | 25 | 24 | 21 | 26 | 25 | 24 | 21 | 26 | 25 | 24 | 21 | 24 | 25 | 24 | 21 | 23 | 23 | 22 | 19 | |
| | kW | 1.19 | 1.21 | 1.25 | 1.28 | 1.27 | 1.30 | 1.34 | 1.38 | 1.35 | 1.38 | 1.42 | 1.47 | 1.42 | 1.45 | 1.50 | 1.54 | 1.48 | 1.51 | 1.56 | 1.61 | 1.53 | 1.56 | 1.61 | 1.66 | |
| | Amps | 4.3 | 4.4 | 4.5 | 4.7 | 4.6 | 4.7 | 4.9 | 5.1 | 5.0 | 5.1 | 5.3 | 5.5 | 5.3 | 5.5 | 5.7 | 5.9 | 5.7 | 5.8 | 6.0 | 6.2 | 6.0 | 6.2 | 6.4 | 6.6 | |
| Hi PR | 217 | 233 | 247 | 257 | 243 | 262 | 277 | 288 | 277 | 298 | 315 | 328 | 315 | 339 | 358 | 374 | 355 | 382 | 403 | 420 | 392 | 422 | 445 | 465 | | |
| Lo PR | 109 | 116 | 126 | 134 | 115 | 122 | 133 | 142 | 119 | 127 | 139 | 148 | 125 | 133 | 146 | 155 | 131 | 140 | 153 | 162 | 136 | 145 | 158 | 168 | | |
| MBh | 16.6 | 17.0 | 17.8 | 19.0 | 16.3 | 16.6 | 17.4 | 18.5 | 15.9 | 16.2 | 16.9 | 18.1 | 15.5 | 15.8 | 16.5 | 17.6 | 14.7 | 15.0 | 15.7 | 16.8 | 13.6 | 13.9 | 14.5 | 15.5 | | |
| S/T | 0.89 | 0.85 | 0.77 | 0.63 | 0.92 | 0.89 | 0.80 | 0.65 | 0.94 | 0.91 | 0.82 | 0.66 | 0.97 | 0.94 | 0.85 | 0.69 | 1.00 | 0.97 | 0.88 | 0.71 | 1.00 | 0.98 | 0.89 | 0.72 | | |
| ΔT | 26 | 25 | 24 | 21 | 26 | 26 | 24 | 21 | 26 | 26 | 24 | 21 | 26 | 26 | 24 | 21 | 26 | 26 | 24 | 21 | 24 | 24 | 23 | 20 | | |
| kW | 1.16 | 1.18 | 1.22 | 1.25 | 1.24 | 1.27 | 1.31 | 1.35 | 1.32 | 1.35 | 1.39 | 1.43 | 1.38 | 1.41 | 1.46 | 1.51 | 1.44 | 1.47 | 1.52 | 1.57 | 1.49 | 1.52 | 1.57 | 1.62 | | |
| Amps | 4.2 | 4.3 | 4.4 | 4.6 | 4.5 | 4.6 | 4.8 | 4.9 | 4.9 | 5.0 | 5.2 | 5.3 | 5.2 | 5.3 | 5.5 | 5.7 | 5.5 | 5.7 | 5.8 | 6.1 | 5.9 | 6.0 | 6.2 | 6.4 | | |
| Hi PR | 210 | 226 | 239 | 249 | 236 | 254 | 268 | 280 | 269 | 289 | 305 | 318 | 306 | 329 | 348 | 362 | 344 | 370 | 391 | 408 | 380 | 409 | 432 | 451 | | |
| Lo PR | 105 | 112 | 122 | 130 | 111 | 118 | 129 | 138 | 116 | 123 | 134 | 143 | 122 | 129 | 141 | 150 | 127 | 136 | 148 | 158 | 132 | 140 | 153 | 163 | | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects AHRI (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

EXPANDED COOLING DATA — SSZ140241A* / CA*F3636*6A*+TXV / MBR800** *-1

| IDB | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | ENTERING INDOOR WET BULB TEMPERATURE | | | | | | | | | | | |
|-------|---------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|--------------------------------------|------|------|------|-------|------|------|------|-------|------|------|----|
| | | 65°F | | | | 75°F | | | | 85°F | | | | 95°F | | | | 105°F | | | | 115°F | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 |
| 70 | MBh | 23.5 | 24.4 | 26.7 | - | 23.0 | 23.8 | 26.1 | - | 22.4 | 23.2 | 25.5 | - | 21.9 | 22.7 | 24.8 | - | 20.8 | 21.5 | 23.6 | - | 19.3 | 20.0 | 21.9 | - |
| | S/T | 0.75 | 0.63 | 0.44 | - | 0.78 | 0.65 | 0.45 | - | 0.80 | 0.67 | 0.46 | - | 0.83 | 0.69 | 0.48 | - | 0.86 | 0.72 | 0.50 | - | 0.87 | 0.72 | 0.50 | - |
| | ΔT | 17 | 15 | 11 | - | 17 | 15 | 11 | - | 17 | 15 | 11 | - | 17 | 15 | 11 | - | 17 | 15 | 11 | - | 16 | 14 | 11 | - |
| | kW | 1.65 | 1.68 | 1.73 | - | 1.77 | 1.80 | 1.86 | - | 1.87 | 1.91 | 1.97 | - | 1.97 | 2.01 | 2.07 | - | 2.04 | 2.09 | 2.15 | - | 2.11 | 2.16 | 2.22 | - |
| | Amps | 10.1 | 10.2 | 10.4 | - | 10.5 | 10.7 | 10.9 | - | 11.0 | 11.2 | 11.4 | - | 11.5 | 11.7 | 11.9 | - | 12.0 | 12.2 | 12.4 | - | 12.4 | 12.6 | 12.9 | - |
| | Hi PR | 222 | 239 | 252 | - | 249 | 268 | 283 | - | 283 | 305 | 322 | - | 323 | 347 | 367 | - | 363 | 391 | 412 | - | 401 | 432 | 456 | - |
| | Lo PR | 110 | 117 | 128 | - | 116 | 124 | 135 | - | 121 | 129 | 140 | - | 127 | 135 | 147 | - | 133 | 142 | 155 | - | 138 | 146 | 160 | - |
| | MBh | 22.8 | 23.7 | 25.9 | - | 22.3 | 23.1 | 25.3 | - | 21.8 | 22.6 | 24.7 | - | 21.2 | 22.0 | 24.1 | - | 20.2 | 20.9 | 22.9 | - | 18.7 | 19.4 | 21.2 | - |
| | S/T | 0.72 | 0.60 | 0.42 | - | 0.74 | 0.62 | 0.43 | - | 0.76 | 0.64 | 0.44 | - | 0.79 | 0.66 | 0.46 | - | 0.82 | 0.68 | 0.47 | - | 0.83 | 0.69 | 0.48 | - |
| | ΔT | 18 | 15 | 12 | - | 18 | 16 | 12 | - | 18 | 16 | 12 | - | 18 | 16 | 12 | - | 18 | 15 | 12 | - | 17 | 14 | 11 | - |
| | kW | 1.64 | 1.67 | 1.72 | - | 1.75 | 1.79 | 1.84 | - | 1.86 | 1.90 | 1.95 | - | 1.95 | 1.99 | 2.05 | - | 2.03 | 2.07 | 2.14 | - | 2.09 | 2.14 | 2.21 | - |
| | Amps | 10.0 | 10.1 | 10.3 | - | 10.5 | 10.6 | 10.8 | - | 11.0 | 11.1 | 11.4 | - | 11.4 | 11.6 | 11.9 | - | 11.9 | 12.1 | 12.3 | - | 12.3 | 12.5 | 12.8 | - |
| Hi PR | 220 | 236 | 250 | - | 247 | 265 | 280 | - | 280 | 302 | 319 | - | 319 | 344 | 363 | - | 359 | 387 | 408 | - | 397 | 427 | 451 | - | |
| Lo PR | 109 | 116 | 127 | - | 115 | 122 | 134 | - | 120 | 127 | 139 | - | 126 | 134 | 146 | - | 132 | 140 | 153 | - | 136 | 145 | 158 | - | |
| MBh | 21.1 | 21.8 | 23.9 | - | 20.6 | 21.3 | 23.4 | - | 20.1 | 20.8 | 22.8 | - | 19.6 | 20.3 | 22.3 | - | 18.6 | 19.3 | 21.1 | - | 17.3 | 17.9 | 19.6 | - | |
| S/T | 0.69 | 0.58 | 0.40 | - | 0.72 | 0.60 | 0.42 | - | 0.74 | 0.62 | 0.43 | - | 0.76 | 0.63 | 0.44 | - | 0.79 | 0.66 | 0.46 | - | 0.80 | 0.66 | 0.46 | - | |
| ΔT | 18 | 16 | 12 | - | 18 | 16 | 12 | - | 18 | 16 | 12 | - | 18 | 16 | 12 | - | 18 | 16 | 12 | - | 17 | 15 | 11 | - | |
| kW | 1.60 | 1.63 | 1.68 | - | 1.72 | 1.75 | 1.80 | - | 1.82 | 1.85 | 1.91 | - | 1.90 | 1.94 | 2.00 | - | 1.98 | 2.02 | 2.08 | - | 2.04 | 2.09 | 2.15 | - | |
| Amps | 9.8 | 10.0 | 10.2 | - | 10.3 | 10.4 | 10.6 | - | 10.8 | 11.0 | 11.2 | - | 11.2 | 11.4 | 11.7 | - | 11.7 | 11.9 | 12.1 | - | 12.1 | 12.3 | 12.6 | - | |
| Hi PR | 213 | 229 | 242 | - | 239 | 257 | 272 | - | 272 | 293 | 309 | - | 310 | 333 | 352 | - | 349 | 375 | 396 | - | 385 | 414 | 438 | - | |
| Lo PR | 106 | 112 | 123 | - | 112 | 119 | 130 | - | 116 | 123 | 135 | - | 122 | 130 | 142 | - | 128 | 136 | 148 | - | 132 | 141 | 153 | - | |

| | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|-------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 75 | MBh | 23.9 | 24.6 | 26.7 | 28.6 | 23.4 | 24.1 | 26.0 | 27.9 | 22.8 | 23.5 | 25.4 | 27.3 | 22.2 | 22.9 | 24.8 | 26.6 | 21.1 | 21.8 | 23.6 | 25.3 | 19.6 | 20.2 | 21.8 | 23.4 |
| | S/T | 0.86 | 0.77 | 0.58 | 0.37 | 0.89 | 0.79 | 0.60 | 0.39 | 0.91 | 0.81 | 0.62 | 0.40 | 0.94 | 0.84 | 0.64 | 0.41 | 0.98 | 0.87 | 0.66 | 0.42 | 0.98 | 0.88 | 0.67 | 0.43 |
| | ΔT | 20 | 18 | 15 | 10 | 20 | 18 | 15 | 10 | 20 | 18 | 15 | 10 | 20 | 19 | 15 | 10 | 20 | 18 | 15 | 10 | 19 | 17 | 14 | 10 |
| | kW | 1.66 | 1.70 | 1.75 | 1.80 | 1.78 | 1.82 | 1.87 | 1.93 | 1.89 | 1.93 | 1.99 | 2.05 | 1.98 | 2.02 | 2.09 | 2.15 | 2.06 | 2.10 | 2.17 | 2.24 | 2.13 | 2.17 | 2.24 | 2.32 |
| | Amps | 10.1 | 10.2 | 10.4 | 10.7 | 10.6 | 10.7 | 10.9 | 11.2 | 11.1 | 11.3 | 11.5 | 11.8 | 11.6 | 11.8 | 12.0 | 12.3 | 12.0 | 12.2 | 12.5 | 12.8 | 12.5 | 12.7 | 13.0 | 13.3 |
| | Hi PR | 224 | 241 | 255 | 266 | 252 | 271 | 286 | 298 | 286 | 308 | 325 | 339 | 326 | 351 | 370 | 386 | 367 | 395 | 417 | 435 | 405 | 436 | 460 | 480 |
| | Lo PR | 111 | 118 | 129 | 138 | 117 | 125 | 136 | 145 | 122 | 130 | 142 | 151 | 128 | 136 | 149 | 159 | 134 | 143 | 156 | 166 | 139 | 148 | 161 | 172 |
| | MBh | 23.2 | 23.9 | 25.9 | 27.8 | 22.7 | 23.4 | 25.3 | 27.1 | 22.1 | 22.8 | 24.7 | 26.5 | 21.6 | 22.2 | 24.1 | 25.8 | 20.5 | 21.1 | 22.9 | 24.5 | 19.0 | 19.6 | 21.2 | 22.7 |
| | S/T | 0.82 | 0.73 | 0.55 | 0.36 | 0.85 | 0.76 | 0.57 | 0.37 | 0.87 | 0.78 | 0.59 | 0.38 | 0.90 | 0.80 | 0.61 | 0.39 | 0.93 | 0.83 | 0.63 | 0.41 | 0.94 | 0.84 | 0.63 | 0.41 |
| | ΔT | 21 | 19 | 15 | 11 | 21 | 19 | 16 | 11 | 21 | 19 | 16 | 11 | 21 | 19 | 16 | 11 | 21 | 19 | 16 | 11 | 19 | 18 | 15 | 10 |
| | kW | 1.65 | 1.68 | 1.73 | 1.78 | 1.77 | 1.80 | 1.86 | 1.92 | 1.87 | 1.91 | 1.97 | 2.03 | 1.97 | 2.01 | 2.07 | 2.13 | 2.04 | 2.09 | 2.15 | 2.22 | 2.11 | 2.16 | 2.22 | 2.30 |
| | Amps | 10.1 | 10.2 | 10.4 | 10.6 | 10.5 | 10.7 | 10.9 | 11.1 | 11.0 | 11.2 | 11.4 | 11.7 | 11.5 | 11.7 | 11.9 | 12.2 | 12.0 | 12.2 | 12.4 | 12.7 | 12.4 | 12.6 | 12.9 | 13.2 |
| Hi PR | 222 | 239 | 252 | 263 | 249 | 268 | 283 | 295 | 283 | 305 | 322 | 336 | 323 | 347 | 367 | 382 | 363 | 391 | 412 | 430 | 401 | 432 | 456 | 475 | |
| Lo PR | 110 | 117 | 128 | 136 | 116 | 124 | 135 | 144 | 121 | 129 | 140 | 150 | 127 | 135 | 147 | 157 | 133 | 142 | 155 | 165 | 138 | 146 | 160 | 170 | |
| MBh | 21.4 | 22.1 | 23.9 | 25.6 | 20.9 | 21.6 | 23.3 | 25.0 | 20.4 | 21.0 | 22.8 | 24.4 | 19.9 | 20.5 | 22.2 | 23.8 | 18.9 | 19.5 | 21.1 | 22.7 | 17.5 | 18.1 | 19.6 | 21.0 | |
| S/T | 0.79 | 0.70 | 0.53 | 0.34 | 0.82 | 0.73 | 0.55 | 0.36 | 0.84 | 0.75 | 0.57 | 0.36 | 0.86 | 0.77 | 0.58 | 0.38 | 0.90 | 0.80 | 0.61 | 0.39 | 0.90 | 0.81 | 0.61 | 0.39 | |
| ΔT | 21 | 19 | 16 | 11 | 21 | 19 | 16 | 11 | 21 | 19 | 16 | 11 | 21 | 20 | 16 | 11 | 21 | 19 | 16 | 11 | 20 | 18 | 15 | 10 | |
| kW | 1.61 | 1.64 | 1.69 | 1.74 | 1.73 | 1.76 | 1.82 | 1.87 | 1.83 | 1.87 | 1.92 | 1.98 | 1.92 | 1.96 | 2.02 | 2.08 | 2.00 | 2.04 | 2.10 | 2.17 | 2.06 | 2.10 | 2.17 | 2.24 | |
| Amps | 9.9 | 10.0 | 10.2 | 10.4 | 10.3 | 10.5 | 10.7 | 10.9 | 10.9 | 11.0 | 11.2 | 11.5 | 11.3 | 11.5 | 11.7 | 12.0 | 11.8 | 11.9 | 12.2 | 12.5 | 12.2 | 12.4 | 12.7 | 13.0 | |
| Hi PR | 215 | 232 | 245 | 255 | 242 | 260 | 275 | 286 | 275 | 296 | 312 | 326 | 313 | 337 | 356 | 371 | 352 | 379 | 400 | 417 | 389 | 419 | 442 | 461 | |
| Lo PR | 107 | 114 | 124 | 132 | 113 | 120 | 131 | 140 | 117 | 125 | 136 | 145 | 123 | 131 | 143 | 152 | 129 | 137 | 150 | 160 | 133 | 142 | 155 | 165 | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects ACCA (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp. +fan)

EXPANDED COOLING DATA — SSZ140241A* / CA*F3636*6A*+TXV / MBR800** -1 (CONT.)

| IDB | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | ENTERING INDOOR WET BULB TEMPERATURE | | | | | | | | | | | |
|-------|---------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|--------------------------------------|------|------|------|-------|------|------|------|-------|------|------|------|
| | | 65°F | | | | 75°F | | | | 85°F | | | | 95°F | | | | 105°F | | | | 115°F | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 |
| 80 | MBh | 24.3 | 24.9 | 26.6 | 28.4 | 23.8 | 24.3 | 26.0 | 27.7 | 23.2 | 23.7 | 25.3 | 27.1 | 22.6 | 23.1 | 24.7 | 26.4 | 21.5 | 22.0 | 23.5 | 25.1 | 19.9 | 20.4 | 21.8 | 23.3 |
| | S/T | 0.94 | 0.88 | 0.72 | 0.54 | 1.00 | 0.91 | 0.74 | 0.56 | 1.00 | 0.94 | 0.76 | 0.57 | 1.00 | 0.97 | 0.79 | 0.59 | 1.00 | 1.00 | 0.82 | 0.61 | 1.00 | 1.00 | 0.82 | 0.62 |
| | ΔT | 22 | 21 | 18 | 15 | 23 | 21 | 19 | 15 | 22 | 21 | 19 | 15 | 22 | 21 | 19 | 15 | 21 | 20 | 18 | 15 | 19 | 20 | 17 | 14 |
| | kW | 1.67 | 1.71 | 1.76 | 1.81 | 1.80 | 1.83 | 1.89 | 1.95 | 1.90 | 1.94 | 2.00 | 2.06 | 2.00 | 2.04 | 2.10 | 2.17 | 2.08 | 2.12 | 2.19 | 2.26 | 2.15 | 2.19 | 2.26 | 2.33 |
| | Amps | 10.2 | 10.3 | 10.5 | 10.7 | 10.6 | 10.8 | 11.0 | 11.2 | 11.2 | 11.3 | 11.6 | 11.8 | 11.6 | 11.8 | 12.1 | 12.4 | 12.1 | 12.3 | 12.6 | 12.9 | 12.6 | 12.8 | 13.1 | 13.4 |
| | Hi PR | 226 | 244 | 257 | 268 | 254 | 273 | 289 | 301 | 289 | 311 | 328 | 343 | 329 | 354 | 374 | 390 | 370 | 399 | 421 | 439 | 409 | 440 | 465 | 485 |
| | Lo PR | 112 | 119 | 130 | 139 | 119 | 126 | 138 | 147 | 123 | 131 | 143 | 153 | 130 | 138 | 150 | 160 | 136 | 144 | 158 | 168 | 140 | 149 | 163 | 174 |
| | MBh | 23.6 | 24.1 | 25.8 | 27.6 | 23.1 | 23.6 | 25.2 | 26.9 | 22.5 | 23.0 | 24.6 | 26.3 | 22.0 | 22.5 | 24.0 | 25.7 | 20.9 | 21.3 | 22.8 | 24.4 | 19.3 | 19.8 | 21.1 | 22.6 |
| | S/T | 0.90 | 0.84 | 0.68 | 0.51 | 0.93 | 0.87 | 0.71 | 0.53 | 0.95 | 0.89 | 0.73 | 0.54 | 0.98 | 0.92 | 0.75 | 0.56 | 1.00 | 0.96 | 0.78 | 0.58 | 1.00 | 0.96 | 0.79 | 0.59 |
| | ΔT | 23 | 22 | 19 | 15 | 23 | 22 | 19 | 15 | 23 | 22 | 19 | 15 | 23 | 22 | 19 | 16 | 23 | 22 | 19 | 15 | 21 | 21 | 18 | 14 |
| kW | 1.66 | 1.70 | 1.75 | 1.80 | 1.78 | 1.82 | 1.87 | 1.93 | 1.89 | 1.93 | 1.99 | 2.05 | 1.98 | 2.02 | 2.09 | 2.15 | 2.06 | 2.10 | 2.17 | 2.24 | 2.13 | 2.17 | 2.24 | 2.32 | |
| Amps | 10.1 | 10.2 | 10.4 | 10.7 | 10.6 | 10.7 | 10.9 | 11.2 | 11.1 | 11.3 | 11.5 | 11.8 | 11.6 | 11.8 | 12.0 | 12.3 | 12.0 | 12.2 | 12.5 | 12.8 | 12.5 | 12.7 | 13.0 | 13.3 | |
| Hi PR | 224 | 241 | 255 | 266 | 252 | 271 | 286 | 298 | 286 | 308 | 325 | 339 | 326 | 351 | 370 | 386 | 367 | 395 | 417 | 435 | 405 | 436 | 460 | 480 | |
| Lo PR | 111 | 118 | 129 | 138 | 117 | 125 | 136 | 145 | 122 | 130 | 142 | 151 | 128 | 136 | 149 | 159 | 134 | 143 | 156 | 166 | 139 | 148 | 161 | 172 | |
| MBh | 21.8 | 22.3 | 23.8 | 25.5 | 21.3 | 21.8 | 23.3 | 24.9 | 20.8 | 21.3 | 22.7 | 24.3 | 20.3 | 20.7 | 22.2 | 23.7 | 19.3 | 19.7 | 21.0 | 22.5 | 17.9 | 18.2 | 19.5 | 20.8 | |
| S/T | 0.86 | 0.81 | 0.66 | 0.49 | 0.90 | 0.84 | 0.68 | 0.51 | 0.92 | 0.86 | 0.70 | 0.52 | 0.95 | 0.89 | 0.72 | 0.54 | 0.98 | 0.92 | 0.75 | 0.56 | 0.99 | 0.93 | 0.76 | 0.57 | |
| ΔT | 23 | 22 | 19 | 16 | 24 | 23 | 20 | 16 | 24 | 23 | 20 | 16 | 24 | 23 | 20 | 16 | 24 | 23 | 20 | 16 | 22 | 21 | 18 | 15 | |
| kW | 1.63 | 1.66 | 1.71 | 1.76 | 1.74 | 1.78 | 1.83 | 1.89 | 1.84 | 1.88 | 1.94 | 2.00 | 1.93 | 1.97 | 2.04 | 2.10 | 2.01 | 2.05 | 2.12 | 2.19 | 2.08 | 2.12 | 2.19 | 2.26 | |
| Amps | 9.9 | 10.1 | 10.3 | 10.5 | 10.4 | 10.5 | 10.7 | 11.0 | 10.9 | 11.1 | 11.3 | 11.6 | 11.4 | 11.5 | 11.8 | 12.1 | 11.8 | 12.0 | 12.3 | 12.6 | 12.3 | 12.5 | 12.7 | 13.1 | |
| Hi PR | 217 | 234 | 247 | 258 | 244 | 263 | 277 | 289 | 278 | 299 | 315 | 329 | 316 | 340 | 359 | 375 | 356 | 383 | 404 | 422 | 393 | 423 | 447 | 466 | |
| Lo PR | 108 | 115 | 125 | 133 | 114 | 121 | 132 | 141 | 118 | 126 | 138 | 146 | 124 | 132 | 144 | 154 | 130 | 139 | 151 | 161 | 135 | 143 | 157 | 167 | |

| | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|-------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 85 | MBh | 24.8 | 25.2 | 26.4 | 28.2 | 24.2 | 24.7 | 25.8 | 27.6 | 23.6 | 24.1 | 25.2 | 26.9 | 23.0 | 23.5 | 24.6 | 26.2 | 21.9 | 22.3 | 23.4 | 24.9 | 20.3 | 20.7 | 21.6 | 23.1 |
| | S/T | 0.98 | 0.95 | 0.86 | 0.70 | 1.00 | 0.98 | 0.89 | 0.72 | 1.00 | 1.00 | 0.91 | 0.74 | 1.00 | 1.00 | 0.94 | 0.76 | 1.00 | 1.00 | 0.98 | 0.79 | 1.00 | 1.00 | 0.98 | 0.80 |
| | ΔT | 23 | 23 | 22 | 19 | 23 | 23 | 22 | 19 | 23 | 23 | 22 | 19 | 22 | 23 | 22 | 19 | 21 | 21 | 22 | 19 | 19 | 20 | 20 | 18 |
| | kW | 1.69 | 1.72 | 1.77 | 1.83 | 1.81 | 1.85 | 1.90 | 1.96 | 1.92 | 1.96 | 2.02 | 2.08 | 2.01 | 2.05 | 2.12 | 2.19 | 2.09 | 2.14 | 2.21 | 2.28 | 2.16 | 2.21 | 2.28 | 2.35 |
| | Amps | 10.2 | 10.3 | 10.5 | 10.8 | 10.7 | 10.8 | 11.1 | 11.3 | 11.2 | 11.4 | 11.6 | 11.9 | 11.7 | 11.9 | 12.1 | 12.4 | 12.2 | 12.4 | 12.6 | 13.0 | 12.7 | 12.9 | 13.1 | 13.5 |
| | Hi PR | 229 | 246 | 260 | 271 | 257 | 276 | 292 | 304 | 292 | 314 | 332 | 346 | 332 | 358 | 378 | 394 | 374 | 402 | 425 | 443 | 413 | 445 | 470 | 490 |
| | Lo PR | 113 | 121 | 132 | 140 | 120 | 127 | 139 | 148 | 125 | 132 | 145 | 154 | 131 | 139 | 152 | 162 | 137 | 146 | 159 | 170 | 142 | 151 | 165 | 175 |
| | MBh | 24.0 | 24.5 | 25.7 | 27.4 | 23.5 | 23.9 | 25.1 | 26.8 | 22.9 | 23.4 | 24.5 | 26.1 | 22.4 | 22.8 | 23.9 | 25.5 | 21.2 | 21.7 | 22.7 | 24.2 | 19.7 | 20.1 | 21.0 | 22.4 |
| | S/T | 0.94 | 0.91 | 0.82 | 0.66 | 0.97 | 0.94 | 0.85 | 0.69 | 1.00 | 0.96 | 0.87 | 0.71 | 1.00 | 0.99 | 0.90 | 0.73 | 1.00 | 1.00 | 0.93 | 0.76 | 1.00 | 1.00 | 0.94 | 0.76 |
| | ΔT | 24 | 24 | 23 | 20 | 25 | 24 | 23 | 20 | 25 | 24 | 23 | 20 | 24 | 25 | 23 | 20 | 24 | 23 | 23 | 20 | 21 | 22 | 21 | 18 |
| kW | 1.67 | 1.71 | 1.76 | 1.81 | 1.80 | 1.83 | 1.89 | 1.95 | 1.90 | 1.94 | 2.00 | 2.06 | 2.00 | 2.04 | 2.10 | 2.17 | 2.08 | 2.12 | 2.19 | 2.26 | 2.15 | 2.19 | 2.26 | 2.33 | |
| Amps | 10.2 | 10.3 | 10.5 | 10.7 | 10.6 | 10.8 | 11.0 | 11.2 | 11.2 | 11.3 | 11.6 | 11.8 | 11.6 | 11.8 | 12.1 | 12.4 | 12.1 | 12.3 | 12.6 | 12.9 | 12.6 | 12.8 | 13.1 | 13.4 | |
| Hi PR | 226 | 244 | 257 | 268 | 254 | 273 | 289 | 301 | 289 | 311 | 328 | 343 | 329 | 354 | 374 | 390 | 370 | 399 | 421 | 439 | 409 | 440 | 465 | 485 | |
| Lo PR | 112 | 119 | 130 | 139 | 119 | 126 | 138 | 147 | 123 | 131 | 143 | 153 | 130 | 138 | 150 | 160 | 136 | 144 | 158 | 168 | 140 | 149 | 163 | 174 | |
| MBh | 22.2 | 22.6 | 23.7 | 25.3 | 21.7 | 22.1 | 23.1 | 24.7 | 21.2 | 21.6 | 22.6 | 24.1 | 20.6 | 21.0 | 22.0 | 23.5 | 19.6 | 20.0 | 20.9 | 22.3 | 18.2 | 18.5 | 19.4 | 20.7 | |
| S/T | 0.91 | 0.87 | 0.79 | 0.64 | 0.94 | 0.91 | 0.82 | 0.66 | 0.96 | 0.93 | 0.84 | 0.68 | 0.99 | 0.96 | 0.87 | 0.70 | 1.00 | 0.99 | 0.90 | 0.73 | 1.00 | 1.00 | 0.91 | 0.73 | |
| ΔT | ΔT | 24 | 23 | 20 | 25 | 25 | 23 | 20 | 25 | 25 | 23 | 20 | 25 | 25 | 24 | 20 | 24 | 25 | 23 | 20 | 22 | 23 | 22 | 19 | |
| kW | 1.64 | 1.67 | 1.72 | 1.77 | 1.75 | 1.79 | 1.84 | 1.90 | 1.86 | 1.90 | 1.95 | 2.02 | 1.95 | 1.99 | 2.05 | 2.12 | 2.03 | 2.07 | 2.13 | 2.20 | 2.09 | 2.14 | 2.21 | 2.28 | |
| Amps | 10.0 | 10.1 | 10.3 | 10.5 | 10.5 | 10.6 | 10.8 | 11.0 | 11.0 | 11.1 | 11.4 | 11.6 | 11.4 | 11.6 | 11.9 | 12.1 | 11.9 | 12.1 | 12.3 | 12.6 | 12.3 | 12.5 | 12.8 | 13.1 | |
| Hi PR | 220 | 236 | 250 | 260 | 246 | 265 | 280 | 292 | 280 | 302 | 319 | 332 | 319 | 344 | 363 | 378 | 359 | 387 | 408 | 426 | 397 | 427 | 451 | 470 | |
| Lo PR | 109 | 116 | 127 | 135 | 115 | 122 | 134 | 142 | 120 | 127 | 139 | 148 | 126 | 134 | 146 | 155 | 132 | 140 | 153 | 163 | 136 | 145 | 158 | 168 | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects AHRI (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp. + fan)

EXPANDED COOLING DATA — SSSZ140301A* / CA*F3642*6A*+TXV / MBR1600** -1

| IDB | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | | | | | | | | | | | | | | |
|------|---------|-----------------------------|-------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|-------|------|------|------|-------|------|------|------|------|---|
| | | 65°F | | | | 75°F | | | | 85°F | | | | 95°F | | | | 105°F | | | | 115°F | | | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | | |
| 70 | 1181 | MBh | 28.2 | 29.3 | 32.0 | - | 27.6 | 28.6 | 31.3 | - | 26.9 | 27.9 | 30.6 | - | 26.3 | 27.2 | 29.8 | - | 24.9 | 25.8 | 28.3 | - | 23.1 | 23.9 | 26.2 | - | |
| | | S/T | 0.79 | 0.66 | 0.46 | - | 0.82 | 0.68 | 0.47 | - | 0.84 | 0.70 | 0.48 | - | 0.86 | 0.72 | 0.50 | - | 0.90 | 0.75 | 0.52 | - | 0.90 | 0.75 | 0.52 | - | |
| | | ΔT | 17 | 15 | 11 | - | 17 | 15 | 11 | - | 18 | 15 | 11 | - | 18 | 15 | 12 | - | 17 | 15 | 11 | - | 16 | 14 | 11 | - | |
| | 1050 | kW | 1.99 | 2.03 | 2.09 | - | 2.13 | 2.18 | 2.24 | - | 2.26 | 2.30 | 2.37 | - | 2.37 | 2.42 | 2.49 | - | 2.46 | 2.51 | 2.59 | - | 2.54 | 2.59 | 2.67 | - | |
| | | Amps | 2.3 | 2.5 | 2.7 | - | 2.9 | 3.0 | 3.3 | - | 3.5 | 3.7 | 4.0 | - | 4.1 | 4.3 | 4.6 | - | 4.6 | 4.8 | 5.1 | - | 5.1 | 5.4 | 5.7 | - | |
| | | Hi PR | 221 | 237 | 251 | - | 247 | 266 | 281 | - | 281 | 303 | 320 | - | 321 | 345 | 364 | - | 361 | 388 | 410 | - | 398 | 429 | 453 | - | |
| | 919 | Lo PR | 112 | 119 | 130 | - | 118 | 126 | 137 | - | 123 | 131 | 143 | - | 129 | 137 | 150 | - | 135 | 144 | 157 | - | 140 | 149 | 162 | - | |
| | | MBh | 27.4 | 28.4 | 31.1 | - | 26.8 | 27.7 | 30.4 | - | 26.1 | 27.1 | 29.7 | - | 25.5 | 26.4 | 28.9 | - | 24.2 | 25.1 | 27.5 | - | 22.4 | 23.2 | 25.5 | - | |
| | | S/T | 0.75 | 0.63 | 0.43 | - | 0.78 | 0.65 | 0.45 | - | 0.80 | 0.67 | 0.46 | - | 0.82 | 0.69 | 0.48 | - | 0.85 | 0.71 | 0.49 | - | 0.86 | 0.72 | 0.50 | - | |
| | 75 | 1181 | ΔT | 18 | 16 | 12 | - | 18 | 16 | 12 | - | 18 | 16 | 12 | - | 18 | 16 | 12 | - | 18 | 16 | 12 | - | 17 | 15 | 11 | - |
| | | | kW | 1.98 | 2.02 | 2.08 | - | 2.12 | 2.16 | 2.22 | - | 2.24 | 2.29 | 2.36 | - | 2.35 | 2.40 | 2.47 | - | 2.44 | 2.49 | 2.57 | - | 2.52 | 2.57 | 2.65 | - |
| | | | Amps | 2.3 | 2.4 | 2.6 | - | 2.8 | 3.0 | 3.2 | - | 3.4 | 3.6 | 3.9 | - | 4.0 | 4.2 | 4.5 | - | 4.5 | 4.7 | 5.1 | - | 5.1 | 5.3 | 5.6 | - |
| 1050 | | Hi PR | 218 | 235 | 248 | - | 245 | 264 | 278 | - | 279 | 300 | 317 | - | 317 | 342 | 361 | - | 357 | 384 | 406 | - | 394 | 425 | 448 | - | |
| | | Lo PR | 111 | 118 | 129 | - | 117 | 124 | 136 | - | 122 | 129 | 141 | - | 128 | 136 | 148 | - | 134 | 142 | 155 | - | 138 | 147 | 161 | - | |
| | | MBh | 25.3 | 26.2 | 28.7 | - | 24.7 | 25.6 | 28.1 | - | 24.1 | 25.0 | 27.4 | - | 23.5 | 24.4 | 26.7 | - | 22.3 | 23.2 | 25.4 | - | 20.7 | 21.5 | 23.5 | - | |
| 919 | | S/T | 0.72 | 0.60 | 0.42 | - | 0.75 | 0.63 | 0.43 | - | 0.77 | 0.64 | 0.44 | - | 0.79 | 0.66 | 0.46 | - | 0.82 | 0.69 | 0.48 | - | 0.83 | 0.69 | 0.48 | - | |
| | | ΔT | 18 | 16 | 12 | - | 19 | 16 | 12 | - | 19 | 16 | 12 | - | 19 | 16 | 12 | - | 18 | 16 | 12 | - | 17 | 15 | 11 | - | |
| | | kW | 1.94 | 1.97 | 2.03 | - | 2.07 | 2.11 | 2.17 | - | 2.19 | 2.23 | 2.30 | - | 2.30 | 2.34 | 2.41 | - | 2.38 | 2.43 | 2.51 | - | 2.46 | 2.51 | 2.59 | - | |
| 70 | | 1181 | Amps | 2.1 | 2.2 | 2.4 | - | 2.6 | 2.8 | 3.0 | - | 3.2 | 3.4 | 3.7 | - | 3.7 | 3.9 | 4.2 | - | 4.3 | 4.5 | 4.8 | - | 4.8 | 5.0 | 5.3 | - |
| | | | Hi PR | 212 | 228 | 241 | - | 238 | 256 | 270 | - | 270 | 291 | 307 | - | 308 | 331 | 350 | - | 346 | 373 | 394 | - | 383 | 412 | 435 | - |
| | | | Lo PR | 107 | 114 | 125 | - | 114 | 121 | 132 | - | 118 | 126 | 137 | - | 124 | 132 | 144 | - | 130 | 138 | 151 | - | 134 | 143 | 156 | - |
| | 1050 | MBh | 28.7 | 29.5 | 32.0 | 34.3 | 28.0 | 28.9 | 31.2 | 33.5 | 27.4 | 28.2 | 30.5 | 32.7 | 26.7 | 27.5 | 29.8 | 31.9 | 25.4 | 26.1 | 28.3 | 30.3 | 23.5 | 24.2 | 26.2 | 28.1 | |
| | | S/T | 0.89 | 0.80 | 0.61 | 0.39 | 0.93 | 0.83 | 0.63 | 0.40 | 0.95 | 0.85 | 0.64 | 0.41 | 0.98 | 0.88 | 0.66 | 0.43 | 1.00 | 0.91 | 0.69 | 0.44 | 1.00 | 0.92 | 0.69 | 0.45 | |
| | | ΔT | 20 | 18 | 15 | 10 | 20 | 19 | 15 | 11 | 20 | 19 | 15 | 11 | 20 | 19 | 15 | 11 | 20 | 19 | 15 | 10 | 18 | 17 | 14 | 10 | |
| | 919 | kW | 2.01 | 2.05 | 2.11 | 2.17 | 2.15 | 2.19 | 2.26 | 2.33 | 2.28 | 2.32 | 2.39 | 2.47 | 2.39 | 2.44 | 2.51 | 2.59 | 2.48 | 2.53 | 2.61 | 2.69 | 2.56 | 2.61 | 2.70 | 2.78 | |
| | | Amps | 2.4 | 2.5 | 2.8 | 3.0 | 2.9 | 3.1 | 3.4 | 3.7 | 3.6 | 3.8 | 4.0 | 4.4 | 4.1 | 4.3 | 4.6 | 5.0 | 4.7 | 4.9 | 5.2 | 5.6 | 5.2 | 5.5 | 5.8 | 6.2 | |
| | | Hi PR | 223 | 240 | 253 | 264 | 250 | 269 | 284 | 296 | 284 | 306 | 323 | 337 | 324 | 348 | 368 | 384 | 364 | 392 | 414 | 432 | 402 | 433 | 457 | 477 | |
| | 1050 | Lo PR | 113 | 120 | 131 | 140 | 119 | 127 | 139 | 148 | 124 | 132 | 144 | 153 | 130 | 139 | 151 | 161 | 137 | 145 | 159 | 169 | 141 | 150 | 164 | 175 | |
| | | MBh | 27.9 | 28.7 | 31.1 | 33.3 | 27.2 | 28.0 | 30.3 | 32.6 | 26.6 | 27.4 | 29.6 | 31.8 | 25.9 | 26.7 | 28.9 | 31.0 | 24.6 | 25.4 | 27.4 | 29.5 | 22.8 | 23.5 | 25.4 | 27.3 | |
| | | S/T | 0.85 | 0.76 | 0.58 | 0.37 | 0.88 | 0.79 | 0.60 | 0.38 | 0.91 | 0.81 | 0.61 | 0.39 | 0.94 | 0.84 | 0.63 | 0.41 | 0.97 | 0.87 | 0.66 | 0.42 | 0.98 | 0.88 | 0.66 | 0.43 | |
| 919 | ΔT | 21 | 19 | 16 | 11 | 21 | 19 | 16 | 11 | 21 | 19 | 16 | 11 | 21 | 20 | 16 | 11 | 21 | 19 | 16 | 11 | 20 | 18 | 15 | 10 | | |
| | kW | 1.99 | 2.03 | 2.09 | 2.15 | 2.14 | 2.18 | 2.24 | 2.31 | 2.26 | 2.30 | 2.37 | 2.45 | 2.37 | 2.42 | 2.49 | 2.57 | 2.46 | 2.51 | 2.59 | 2.67 | 2.54 | 2.59 | 2.67 | 2.76 | | |
| | Amps | 2.3 | 2.5 | 2.7 | 3.0 | 2.9 | 3.0 | 3.3 | 3.6 | 3.5 | 3.7 | 4.0 | 4.3 | 4.1 | 4.3 | 4.6 | 4.9 | 4.6 | 4.8 | 5.1 | 5.5 | 5.1 | 5.4 | 5.7 | 6.1 | | |
| 1050 | Hi PR | 221 | 237 | 251 | 261 | 248 | 266 | 281 | 293 | 281 | 303 | 320 | 334 | 321 | 345 | 364 | 380 | 361 | 388 | 410 | 427 | 399 | 429 | 453 | 472 | | |
| | Lo PR | 112 | 119 | 130 | 138 | 118 | 126 | 137 | 146 | 123 | 131 | 143 | 152 | 129 | 137 | 150 | 160 | 135 | 144 | 157 | 167 | 140 | 149 | 162 | 173 | | |
| | MBh | 25.7 | 26.5 | 28.7 | 30.8 | 25.1 | 25.9 | 28.0 | 30.0 | 24.5 | 25.2 | 27.3 | 29.3 | 23.9 | 24.6 | 26.7 | 28.6 | 22.7 | 23.4 | 25.3 | 27.2 | 21.1 | 21.7 | 23.5 | 25.2 | | |
| 919 | S/T | 0.82 | 0.74 | 0.56 | 0.36 | 0.85 | 0.76 | 0.58 | 0.37 | 0.87 | 0.78 | 0.59 | 0.38 | 0.90 | 0.81 | 0.61 | 0.39 | 0.94 | 0.84 | 0.63 | 0.41 | 0.94 | 0.84 | 0.64 | 0.41 | | |
| | ΔT | 21 | 19 | 16 | 11 | 21 | 20 | 16 | 11 | 21 | 20 | 16 | 11 | 22 | 20 | 16 | 11 | 21 | 20 | 16 | 11 | 20 | 18 | 15 | 10 | | |
| | kW | 1.95 | 1.99 | 2.05 | 2.11 | 2.09 | 2.13 | 2.19 | 2.26 | 2.21 | 2.25 | 2.32 | 2.39 | 2.31 | 2.36 | 2.43 | 2.51 | 2.40 | 2.45 | 2.53 | 2.61 | 2.48 | 2.53 | 2.61 | 2.69 | | |
| 1050 | Amps | 2.1 | 2.3 | 2.5 | 2.8 | 2.7 | 2.8 | 3.1 | 3.4 | 3.3 | 3.5 | 3.7 | 4.0 | 3.8 | 4.0 | 4.3 | 4.6 | 4.4 | 4.6 | 4.9 | 5.2 | 4.9 | 5.1 | 5.4 | 5.8 | | |
| | Hi PR | 214 | 230 | 243 | 254 | 240 | 258 | 273 | 285 | 273 | 294 | 310 | 324 | 311 | 335 | 353 | 369 | 350 | 376 | 398 | 415 | 387 | 416 | 439 | 458 | | |
| | Lo PR | 109 | 115 | 126 | 134 | 115 | 122 | 133 | 142 | 119 | 127 | 138 | 147 | 125 | 133 | 145 | 155 | 131 | 140 | 152 | 162 | 136 | 144 | 158 | 168 | | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.

Shaded area reflects ACCA (TVA) conditions

kW = Total system power
 Amps = outdoor unit amps (comp. + fan)

EXPANDED COOLING DATA — SSSZ140301A* / CA*F3642*6A*+TXV / MBR1600** -1 (CONT.)

| IDB | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | ENTERING INDOOR WET BULB TEMPERATURE | | | | | | | | | | | | | |
|------|---------|-----------------------------|-------|------|------|------|------|------|------|------|------|------|------|--------------------------------------|------|------|------|-------|------|------|------|-------|------|------|------|------|------|
| | | 65°F | | | | 75°F | | | | 85°F | | | | 95°F | | | | 105°F | | | | 115°F | | | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | | |
| 80 | 1181 | MBh | 29.2 | 29.8 | 31.9 | 34.1 | 28.5 | 29.2 | 31.1 | 33.3 | 27.9 | 28.5 | 30.4 | 32.5 | 27.2 | 27.8 | 29.7 | 31.7 | 25.8 | 26.4 | 28.2 | 30.1 | 23.9 | 24.4 | 26.1 | 27.9 | |
| | | S/T | 1.00 | 0.92 | 0.75 | 0.56 | 1.00 | 0.95 | 0.78 | 0.58 | 1.00 | 1.00 | 0.80 | 0.59 | 1.00 | 1.00 | 0.82 | 0.61 | 1.00 | 1.00 | 0.85 | 0.64 | 1.00 | 1.00 | 0.86 | 0.64 | |
| | | ΔT | 23 | 21 | 19 | 15 | 22 | 22 | 19 | 15 | 21 | 22 | 19 | 15 | 21 | 22 | 19 | 15 | 20 | 21 | 19 | 15 | 19 | 19 | 17 | 14 | |
| | 1050 | kW | 2.02 | 2.06 | 2.12 | 2.19 | 2.17 | 2.21 | 2.28 | 2.35 | 2.29 | 2.34 | 2.41 | 2.49 | 2.40 | 2.45 | 2.53 | 2.61 | 2.50 | 2.55 | 2.63 | 2.71 | 2.58 | 2.64 | 2.72 | 2.80 | |
| | | Amps | 2.4 | 2.6 | 2.8 | 3.1 | 3.0 | 3.2 | 3.4 | 3.7 | 3.7 | 3.9 | 4.1 | 4.5 | 4.2 | 4.4 | 4.7 | 5.1 | 4.8 | 5.0 | 5.3 | 5.7 | 5.3 | 5.6 | 5.9 | 6.3 | |
| | | Hi PR | 225 | 242 | 256 | 267 | 253 | 272 | 287 | 299 | 287 | 309 | 326 | 340 | 327 | 352 | 372 | 388 | 368 | 396 | 418 | 436 | 407 | 438 | 462 | 482 | |
| | 919 | Lo PR | 114 | 121 | 133 | 141 | 121 | 128 | 140 | 149 | 125 | 133 | 146 | 155 | 132 | 140 | 153 | 163 | 138 | 147 | 160 | 171 | 143 | 152 | 166 | 177 | |
| | | MBh | 28.4 | 29.0 | 31.0 | 33.1 | 27.7 | 28.3 | 30.2 | 32.3 | 27.0 | 27.6 | 29.5 | 31.6 | 26.4 | 27.0 | 28.8 | 30.8 | 25.1 | 25.6 | 27.4 | 29.2 | 23.2 | 23.7 | 25.3 | 27.1 | |
| | | S/T | 0.94 | 0.88 | 0.71 | 0.53 | 0.97 | 0.91 | 0.74 | 0.55 | 0.99 | 0.93 | 0.76 | 0.57 | 1.00 | 0.96 | 0.78 | 0.59 | 1.00 | 1.00 | 0.81 | 0.61 | 1.00 | 1.00 | 0.82 | 0.61 | |
| | 85 | 1181 | ΔT | 23 | 22 | 19 | 15 | 24 | 23 | 20 | 16 | 24 | 23 | 20 | 16 | 23 | 23 | 20 | 16 | 22 | 22 | 19 | 16 | 20 | 21 | 18 | 15 |
| | | | kW | 2.01 | 2.05 | 2.11 | 2.17 | 2.15 | 2.19 | 2.26 | 2.33 | 2.28 | 2.32 | 2.39 | 2.47 | 2.39 | 2.44 | 2.51 | 2.59 | 2.48 | 2.53 | 2.61 | 2.69 | 2.56 | 2.61 | 2.70 | 2.78 |
| | | | Amps | 2.4 | 2.5 | 2.8 | 3.0 | 2.9 | 3.1 | 3.4 | 3.7 | 3.6 | 3.8 | 4.0 | 4.4 | 4.1 | 4.3 | 4.6 | 5.0 | 4.7 | 4.9 | 5.2 | 5.6 | 5.2 | 5.5 | 5.8 | 6.2 |
| 1050 | | Hi PR | 223 | 240 | 253 | 264 | 250 | 269 | 284 | 296 | 284 | 306 | 323 | 337 | 324 | 348 | 368 | 384 | 364 | 392 | 414 | 432 | 403 | 433 | 457 | 477 | |
| | | Lo PR | 113 | 120 | 131 | 140 | 119 | 127 | 139 | 148 | 124 | 132 | 144 | 154 | 130 | 139 | 151 | 161 | 137 | 145 | 159 | 169 | 141 | 150 | 164 | 175 | |
| | | MBh | 26.2 | 26.7 | 28.6 | 30.5 | 25.6 | 26.1 | 27.9 | 29.8 | 25.0 | 25.5 | 27.2 | 29.1 | 24.3 | 24.9 | 26.6 | 28.4 | 23.1 | 23.6 | 25.3 | 27.0 | 21.4 | 21.9 | 23.4 | 25.0 | |
| 919 | | S/T | 0.90 | 0.85 | 0.69 | 0.51 | 0.93 | 0.88 | 0.71 | 0.53 | 0.96 | 0.90 | 0.73 | 0.55 | 0.99 | 0.93 | 0.75 | 0.56 | 1.03 | 0.96 | 0.78 | 0.59 | 1.04 | 0.97 | 0.79 | 0.59 | |
| | | ΔT | 24 | 23 | 20 | 16 | 24 | 23 | 20 | 16 | 24 | 23 | 20 | 16 | 24 | 23 | 20 | 16 | 24 | 23 | 20 | 16 | 22 | 21 | 18 | 15 | |
| | | kW | 1.97 | 2.00 | 2.06 | 2.12 | 2.10 | 2.14 | 2.21 | 2.27 | 2.22 | 2.27 | 2.34 | 2.41 | 2.33 | 2.38 | 2.45 | 2.53 | 2.42 | 2.47 | 2.55 | 2.63 | 2.50 | 2.55 | 2.63 | 2.72 | |
| 85 | | 1181 | Amps | 2.2 | 2.4 | 2.6 | 2.8 | 2.7 | 2.9 | 3.2 | 3.4 | 3.4 | 3.5 | 3.8 | 4.1 | 3.9 | 4.1 | 4.4 | 4.7 | 4.4 | 4.7 | 5.0 | 5.3 | 5.0 | 5.2 | 5.5 | 5.9 |
| | | | Hi PR | 216 | 233 | 246 | 256 | 243 | 261 | 276 | 287 | 276 | 297 | 313 | 327 | 314 | 338 | 357 | 372 | 353 | 380 | 402 | 419 | 390 | 420 | 444 | 463 |
| | | | Lo PR | 110 | 117 | 127 | 136 | 116 | 123 | 135 | 143 | 120 | 128 | 140 | 149 | 126 | 135 | 147 | 156 | 133 | 141 | 154 | 164 | 137 | 146 | 159 | 170 |
| | 1050 | MBh | 29.7 | 30.3 | 31.7 | 33.9 | 29.0 | 29.6 | 31.0 | 33.1 | 28.3 | 28.9 | 30.3 | 32.3 | 27.6 | 28.2 | 29.5 | 31.5 | 26.3 | 26.8 | 28.0 | 29.9 | 24.3 | 24.8 | 26.0 | 27.7 | |
| | | S/T | 1.00 | 0.99 | 0.90 | 0.73 | 1.00 | 1.00 | 0.93 | 0.75 | 1.00 | 1.00 | 0.95 | 0.77 | 1.00 | 1.00 | 0.98 | 0.80 | 1.00 | 1.00 | 0.90 | 0.83 | 1.00 | 1.00 | 0.90 | 0.83 | |
| | | ΔT | 23 | 23 | 22 | 19 | 23 | 23 | 22 | 19 | 22 | 22 | 22 | 19 | 22 | 22 | 23 | 20 | 20 | 21 | 22 | 19 | 19 | 19 | 20 | 18 | |
| | 919 | kW | 2.04 | 2.08 | 2.14 | 2.20 | 2.18 | 2.23 | 2.29 | 2.36 | 2.31 | 2.36 | 2.43 | 2.50 | 2.42 | 2.47 | 2.55 | 2.63 | 2.52 | 2.57 | 2.65 | 2.74 | 2.60 | 2.66 | 2.74 | 2.83 | |
| | | Amps | 2.5 | 2.7 | 2.9 | 3.2 | 3.1 | 3.3 | 3.5 | 3.8 | 3.7 | 3.9 | 4.2 | 4.5 | 4.3 | 4.5 | 4.8 | 5.2 | 4.9 | 5.1 | 5.4 | 5.8 | 5.4 | 5.7 | 6.0 | 6.4 | |
| | | Hi PR | 227 | 245 | 258 | 269 | 255 | 274 | 290 | 302 | 290 | 312 | 330 | 344 | 330 | 356 | 375 | 392 | 372 | 400 | 422 | 440 | 411 | 442 | 467 | 487 | |
| | 1050 | Lo PR | 115 | 123 | 134 | 143 | 122 | 130 | 141 | 151 | 127 | 135 | 147 | 157 | 133 | 141 | 154 | 164 | 139 | 148 | 162 | 172 | 144 | 153 | 167 | 178 | |
| | | MBh | 28.9 | 29.4 | 30.8 | 32.9 | 28.2 | 28.7 | 30.1 | 32.1 | 27.5 | 28.0 | 29.4 | 31.3 | 26.8 | 27.4 | 28.7 | 30.6 | 25.5 | 26.0 | 27.2 | 29.0 | 23.6 | 24.1 | 25.2 | 26.9 | |
| | | S/T | 0.98 | 0.95 | 0.85 | 0.69 | 1.00 | 0.98 | 0.88 | 0.72 | 1.00 | 1.00 | 0.91 | 0.74 | 1.00 | 1.00 | 0.94 | 0.76 | 1.00 | 1.00 | 0.97 | 0.79 | 1.00 | 1.00 | 0.98 | 0.80 | |
| 919 | ΔT | 25 | 24 | 23 | 20 | 25 | 25 | 23 | 20 | 24 | 25 | 23 | 20 | 24 | 24 | 23 | 20 | 22 | 23 | 23 | 20 | 21 | 21 | 22 | 19 | | |
| | kW | 2.02 | 2.06 | 2.12 | 2.19 | 2.17 | 2.21 | 2.28 | 2.35 | 2.29 | 2.34 | 2.41 | 2.49 | 2.40 | 2.45 | 2.53 | 2.61 | 2.50 | 2.55 | 2.63 | 2.71 | 2.58 | 2.64 | 2.72 | 2.80 | | |
| | Amps | 2.4 | 2.6 | 2.8 | 3.1 | 3.0 | 3.2 | 3.4 | 3.7 | 3.7 | 3.9 | 4.1 | 4.5 | 4.2 | 4.4 | 4.7 | 5.1 | 4.8 | 5.0 | 5.3 | 5.7 | 5.3 | 5.6 | 5.9 | 6.3 | | |
| 1050 | Hi PR | 225 | 242 | 256 | 267 | 253 | 272 | 287 | 299 | 287 | 309 | 326 | 340 | 327 | 352 | 372 | 388 | 368 | 396 | 418 | 436 | 407 | 438 | 462 | 482 | | |
| | Lo PR | 114 | 121 | 133 | 141 | 121 | 128 | 140 | 149 | 125 | 133 | 146 | 155 | 132 | 140 | 153 | 163 | 138 | 147 | 160 | 171 | 143 | 152 | 166 | 177 | | |
| | MBh | 26.6 | 27.1 | 28.4 | 30.3 | 26.0 | 26.5 | 27.8 | 29.6 | 25.4 | 25.9 | 27.1 | 28.9 | 24.8 | 25.3 | 26.4 | 28.2 | 23.5 | 24.0 | 25.1 | 26.8 | 21.8 | 22.2 | 23.3 | 24.8 | | |
| 919 | S/T | 0.95 | 0.91 | 0.82 | 0.67 | 0.98 | 0.95 | 0.85 | 0.69 | 1.00 | 0.97 | 0.87 | 0.71 | 1.00 | 1.00 | 0.90 | 0.73 | 1.00 | 1.00 | 0.94 | 0.76 | 1.00 | 1.00 | 0.94 | 0.77 | | |
| | ΔT | 25 | 25 | 23 | 20 | 25 | 25 | 24 | 21 | 25 | 25 | 24 | 21 | 25 | 25 | 24 | 21 | 24 | 24 | 24 | 21 | 22 | 22 | 22 | 19 | | |
| | kW | 1.98 | 2.02 | 2.08 | 2.14 | 2.12 | 2.16 | 2.22 | 2.29 | 2.24 | 2.29 | 2.35 | 2.43 | 2.35 | 2.40 | 2.47 | 2.55 | 2.44 | 2.49 | 2.57 | 2.65 | 2.52 | 2.57 | 2.65 | 2.74 | | |
| 1050 | Amps | 2.3 | 2.4 | 2.6 | 2.9 | 2.8 | 3.0 | 3.2 | 3.5 | 3.4 | 3.6 | 3.9 | 4.2 | 4.0 | 4.2 | 4.5 | 4.8 | 4.5 | 4.7 | 5.0 | 5.4 | 5.1 | 5.3 | 5.6 | 6.0 | | |
| | Hi PR | 218 | 235 | 248 | 259 | 245 | 264 | 278 | 290 | 279 | 300 | 317 | 330 | 317 | 341 | 361 | 376 | 357 | 384 | 406 | 423 | 394 | 424 | 448 | 467 | | |
| | Lo PR | 111 | 118 | 129 | 137 | 117 | 124 | 136 | 145 | 122 | 129 | 141 | 150 | 128 | 136 | 148 | 158 | 134 | 142 | 155 | 166 | 138 | 147 | 161 | 171 | | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects AHRI (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

EXPANDED COOLING DATA — SSZ140361A* / CA*F4860*6A*+TXV / MBR1600** -1

| IDB | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | ENTERING INDOOR WET BULB TEMPERATURE | | | | | | | | | | | |
|-------|---------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|--------------------------------------|------|------|------|-------|------|------|------|-------|------|------|----|
| | | 65°F | | | | 75°F | | | | 85°F | | | | 95°F | | | | 105°F | | | | 115°F | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 |
| 70 | MBh | 33.9 | 35.1 | 38.5 | - | 33.1 | 34.3 | 37.6 | - | 32.3 | 33.5 | 36.7 | - | 31.5 | 32.7 | 35.8 | - | 30.0 | 31.1 | 34.0 | - | 27.8 | 28.8 | 31.5 | - |
| | S/T | 0.72 | 0.60 | 0.42 | - | 0.75 | 0.63 | 0.43 | - | 0.77 | 0.64 | 0.44 | - | 0.79 | 0.66 | 0.46 | - | 0.82 | 0.69 | 0.48 | - | 0.83 | 0.69 | 0.48 | - |
| | ΔT | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 18 | 16 | 12 | - |
| | kW | 2.34 | 2.39 | 2.46 | - | 2.51 | 2.56 | 2.64 | - | 2.66 | 2.72 | 2.80 | - | 2.79 | 2.85 | 2.94 | - | 2.90 | 2.96 | 3.06 | - | 3.00 | 3.06 | 3.16 | - |
| | Amps | 8.6 | 8.8 | 9.1 | - | 9.3 | 9.5 | 9.8 | - | 10.1 | 10.3 | 10.6 | - | 10.7 | 11.0 | 11.3 | - | 11.4 | 11.7 | 12.0 | - | 12.0 | 12.3 | 12.7 | - |
| | Hi PR | 218 | 235 | 248 | - | 245 | 264 | 278 | - | 279 | 300 | 317 | - | 317 | 342 | 361 | - | 357 | 384 | 406 | - | 395 | 425 | 448 | - |
| | Lo PR | 105 | 112 | 122 | - | 111 | 118 | 129 | - | 115 | 123 | 134 | - | 121 | 129 | 141 | - | 127 | 135 | 148 | - | 132 | 140 | 153 | - |
| | MBh | 32.9 | 34.1 | 37.4 | - | 32.2 | 33.3 | 36.5 | - | 31.4 | 32.5 | 35.6 | - | 30.6 | 31.7 | 34.8 | - | 29.1 | 30.2 | 33.0 | - | 26.9 | 27.9 | 30.6 | - |
| | S/T | 0.69 | 0.58 | 0.40 | - | 0.71 | 0.60 | 0.41 | - | 0.73 | 0.61 | 0.42 | - | 0.76 | 0.63 | 0.44 | - | 0.79 | 0.66 | 0.45 | - | 0.79 | 0.66 | 0.46 | - |
| | ΔT | 20 | 17 | 13 | - | 20 | 17 | 13 | - | 20 | 17 | 13 | - | 20 | 18 | 13 | - | 20 | 17 | 13 | - | 19 | 16 | 12 | - |
| kW | 2.33 | 2.37 | 2.44 | - | 2.49 | 2.54 | 2.62 | - | 2.64 | 2.69 | 2.78 | - | 2.77 | 2.83 | 2.92 | - | 2.88 | 2.94 | 3.03 | - | 2.98 | 3.04 | 3.14 | - | |
| Amps | 8.6 | 8.8 | 9.0 | - | 9.2 | 9.4 | 9.7 | - | 10.0 | 10.2 | 10.5 | - | 10.6 | 10.9 | 11.2 | - | 11.3 | 11.6 | 11.9 | - | 11.9 | 12.2 | 12.6 | - | |
| Hi PR | 216 | 233 | 246 | - | 243 | 261 | 276 | - | 276 | 297 | 314 | - | 314 | 338 | 357 | - | 354 | 380 | 402 | - | 391 | 420 | 444 | - | |
| Lo PR | 104 | 111 | 121 | - | 110 | 117 | 128 | - | 114 | 122 | 133 | - | 120 | 128 | 140 | - | 126 | 134 | 146 | - | 130 | 139 | 151 | - | |
| MBh | 30.4 | 31.5 | 34.5 | - | 29.7 | 30.8 | 33.7 | - | 29.0 | 30.0 | 32.9 | - | 28.3 | 29.3 | 32.1 | - | 26.9 | 27.8 | 30.5 | - | 24.9 | 25.8 | 28.2 | - | |
| S/T | 0.67 | 0.56 | 0.38 | - | 0.69 | 0.58 | 0.40 | - | 0.71 | 0.59 | 0.41 | - | 0.73 | 0.61 | 0.42 | - | 0.76 | 0.63 | 0.44 | - | 0.76 | 0.64 | 0.44 | - | |
| ΔT | 20 | 18 | 13 | - | 20 | 18 | 13 | - | 20 | 18 | 13 | - | 21 | 18 | 14 | - | 21 | 18 | 13 | - | 19 | 16 | 12 | - | |
| kW | 2.28 | 2.32 | 2.39 | - | 2.44 | 2.49 | 2.56 | - | 2.58 | 2.63 | 2.71 | - | 2.71 | 2.76 | 2.85 | - | 2.81 | 2.87 | 2.96 | - | 2.90 | 2.97 | 3.06 | - | |
| Amps | 8.4 | 8.5 | 8.8 | - | 9.0 | 9.2 | 9.5 | - | 9.7 | 9.9 | 10.3 | - | 10.4 | 10.6 | 10.9 | - | 11.0 | 11.2 | 11.6 | - | 11.6 | 11.9 | 12.3 | - | |
| Hi PR | 210 | 226 | 238 | - | 235 | 253 | 267 | - | 268 | 288 | 304 | - | 305 | 328 | 346 | - | 343 | 369 | 390 | - | 379 | 408 | 431 | - | |
| Lo PR | 101 | 107 | 117 | - | 107 | 114 | 124 | - | 111 | 118 | 129 | - | 117 | 124 | 135 | - | 122 | 130 | 142 | - | 126 | 134 | 147 | - | |

| | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|-------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 75 | MBh | 34.5 | 35.5 | 38.4 | 41.2 | 33.7 | 34.7 | 37.5 | 40.3 | 32.9 | 33.8 | 36.6 | 39.3 | 32.1 | 33.0 | 35.7 | 38.4 | 30.5 | 31.4 | 34.0 | 36.4 | 28.2 | 29.1 | 31.5 | 33.8 |
| | S/T | 0.82 | 0.74 | 0.56 | 0.36 | 0.85 | 0.76 | 0.58 | 0.37 | 0.87 | 0.78 | 0.59 | 0.38 | 0.90 | 0.81 | 0.61 | 0.39 | 0.94 | 0.84 | 0.63 | 0.41 | 0.94 | 0.84 | 0.64 | 0.41 |
| | ΔT | 22 | 20 | 17 | 11 | 22 | 21 | 17 | 12 | 22 | 21 | 17 | 12 | 23 | 21 | 17 | 12 | 22 | 20 | 17 | 12 | 21 | 19 | 16 | 11 |
| | kW | 2.36 | 2.41 | 2.48 | 2.55 | 2.53 | 2.58 | 2.66 | 2.74 | 2.68 | 2.74 | 2.82 | 2.91 | 2.81 | 2.87 | 2.96 | 3.06 | 2.93 | 2.99 | 3.08 | 3.18 | 3.02 | 3.09 | 3.19 | 3.29 |
| | Amps | 8.7 | 8.9 | 9.2 | 9.5 | 9.4 | 9.6 | 9.9 | 10.3 | 10.2 | 10.4 | 10.7 | 11.1 | 10.8 | 11.1 | 11.4 | 11.8 | 11.5 | 11.8 | 12.1 | 12.6 | 12.1 | 12.4 | 12.8 | 13.3 |
| | Hi PR | 221 | 237 | 251 | 261 | 248 | 266 | 281 | 293 | 282 | 303 | 320 | 334 | 321 | 345 | 364 | 380 | 361 | 388 | 410 | 428 | 399 | 429 | 453 | 472 |
| | Lo PR | 106 | 113 | 123 | 131 | 112 | 119 | 130 | 139 | 117 | 124 | 136 | 144 | 123 | 130 | 142 | 152 | 128 | 137 | 149 | 159 | 133 | 141 | 154 | 164 |
| | MBh | 33.5 | 34.5 | 37.3 | 40.0 | 32.7 | 33.7 | 36.4 | 39.1 | 31.9 | 32.9 | 35.6 | 38.2 | 31.1 | 32.1 | 34.7 | 37.2 | 29.6 | 30.5 | 33.0 | 35.4 | 27.4 | 28.2 | 30.5 | 32.8 |
| | S/T | 0.78 | 0.70 | 0.53 | 0.34 | 0.81 | 0.73 | 0.55 | 0.35 | 0.83 | 0.75 | 0.56 | 0.36 | 0.86 | 0.77 | 0.58 | 0.37 | 0.89 | 0.80 | 0.60 | 0.39 | 0.90 | 0.81 | 0.61 | 0.39 |
| | ΔT | 23 | 21 | 17 | 12 | 23 | 21 | 18 | 12 | 23 | 21 | 18 | 12 | 23 | 22 | 18 | 12 | 23 | 21 | 17 | 12 | 22 | 20 | 16 | 11 |
| kW | 2.34 | 2.39 | 2.46 | 2.54 | 2.51 | 2.56 | 2.64 | 2.72 | 2.66 | 2.72 | 2.80 | 2.89 | 2.79 | 2.85 | 2.94 | 3.03 | 2.90 | 2.97 | 3.06 | 3.16 | 3.00 | 3.06 | 3.16 | 3.26 | |
| Amps | 8.7 | 8.8 | 9.1 | 9.4 | 9.3 | 9.5 | 9.8 | 10.2 | 10.1 | 10.3 | 10.6 | 11.0 | 10.7 | 11.0 | 11.3 | 11.7 | 11.4 | 11.7 | 12.0 | 12.5 | 12.0 | 12.3 | 12.7 | 13.2 | |
| Hi PR | 218 | 235 | 248 | 259 | 245 | 264 | 279 | 290 | 279 | 300 | 317 | 330 | 317 | 342 | 361 | 376 | 357 | 384 | 406 | 423 | 395 | 425 | 448 | 468 | |
| Lo PR | 105 | 112 | 122 | 130 | 111 | 118 | 129 | 137 | 116 | 123 | 134 | 143 | 121 | 129 | 141 | 150 | 127 | 135 | 148 | 157 | 132 | 140 | 153 | 163 | |
| MBh | 30.9 | 31.8 | 34.4 | 37.0 | 30.2 | 31.1 | 33.6 | 36.1 | 29.5 | 30.3 | 32.8 | 35.2 | 28.7 | 29.6 | 32.0 | 34.4 | 27.3 | 28.1 | 30.4 | 32.7 | 25.3 | 26.0 | 28.2 | 30.3 | |
| S/T | 0.76 | 0.68 | 0.51 | 0.33 | 0.78 | 0.70 | 0.53 | 0.34 | 0.80 | 0.72 | 0.54 | 0.35 | 0.83 | 0.74 | 0.56 | 0.36 | 0.86 | 0.77 | 0.58 | 0.37 | 0.87 | 0.78 | 0.59 | 0.38 | |
| ΔT | 23 | 22 | 18 | 12 | 24 | 22 | 18 | 12 | 24 | 22 | 18 | 12 | 24 | 22 | 18 | 12 | 24 | 22 | 18 | 12 | 22 | 20 | 17 | 11 | |
| kW | 2.29 | 2.34 | 2.41 | 2.48 | 2.46 | 2.51 | 2.58 | 2.66 | 2.60 | 2.65 | 2.73 | 2.82 | 2.73 | 2.78 | 2.87 | 2.96 | 2.84 | 2.89 | 2.98 | 3.08 | 2.93 | 2.99 | 3.08 | 3.18 | |
| Amps | 8.4 | 8.6 | 8.9 | 9.2 | 9.1 | 9.3 | 9.6 | 9.9 | 9.8 | 10.0 | 10.4 | 10.7 | 10.5 | 10.7 | 11.0 | 11.4 | 11.1 | 11.3 | 11.7 | 12.1 | 11.7 | 12.0 | 12.4 | 12.8 | |
| Hi PR | 212 | 228 | 241 | 251 | 238 | 256 | 270 | 282 | 270 | 291 | 307 | 320 | 308 | 331 | 350 | 365 | 346 | 373 | 394 | 411 | 383 | 412 | 435 | 454 | |
| Lo PR | 102 | 109 | 119 | 126 | 108 | 115 | 125 | 133 | 112 | 119 | 130 | 139 | 118 | 125 | 137 | 146 | 123 | 131 | 143 | 153 | 128 | 136 | 148 | 158 | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects ACCA (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

EXPANDED COOLING DATA — SSZ140361A* / CA*F4860*6A*+TXV / MBR1600** -1 (CONT.)

| IDB | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | ENTERING INDOOR WET BULB TEMPERATURE | | | | | | | | | | | |
|-------|---------|-----------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | 65°F | | | | 75°F | | | | 85°F | | | | 95°F | | | | 105°F | | | | 115°F | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 |
| 80 | MBh | 35.09 | 35.86 | 38.31 | 40.95 | 34.28 | 35.03 | 37.42 | 40.00 | 33.46 | 34.19 | 36.53 | 39.05 | 32.64 | 33.36 | 35.64 | 38.10 | 31.01 | 31.69 | 33.86 | 36.19 | 28.73 | 29.35 | 31.36 | 33.53 |
| | S/T | 0.90 | 0.85 | 0.69 | 0.51 | 0.93 | 0.88 | 0.71 | 0.53 | 0.96 | 0.90 | 0.73 | 0.55 | 1.00 | 0.93 | 0.75 | 0.56 | 1.00 | 0.96 | 0.78 | 0.59 | 1.00 | 0.97 | 0.79 | 0.59 |
| | ΔT | 25 | 24 | 21 | 16 | 25 | 24 | 21 | 17 | 25 | 24 | 21 | 17 | 25 | 24 | 21 | 17 | 24 | 24 | 21 | 16 | 22 | 22 | 19 | 15 |
| | kW | 2.38 | 2.43 | 2.50 | 2.57 | 2.55 | 2.60 | 2.68 | 2.77 | 2.70 | 2.76 | 2.84 | 2.93 | 2.84 | 2.90 | 2.99 | 3.08 | 2.95 | 3.01 | 3.11 | 3.21 | 3.05 | 3.11 | 3.21 | 3.32 |
| | Amps | 8.8 | 9.0 | 9.3 | 9.6 | 9.5 | 9.7 | 10.0 | 10.3 | 10.3 | 10.5 | 10.8 | 11.2 | 10.9 | 11.2 | 11.5 | 12.0 | 11.6 | 11.9 | 12.3 | 12.7 | 12.3 | 12.5 | 13.0 | 13.4 |
| | Hi PR | 223 | 240 | 253 | 264 | 250 | 269 | 284 | 296 | 284 | 306 | 323 | 337 | 324 | 349 | 368 | 384 | 364 | 392 | 414 | 432 | 403 | 433 | 457 | 477 |
| | Lo PR | 107 | 114 | 125 | 133 | 113 | 121 | 132 | 140 | 118 | 125 | 137 | 146 | 124 | 132 | 144 | 153 | 130 | 138 | 151 | 160 | 134 | 143 | 156 | 166 |
| | MBh | 34.1 | 34.8 | 37.2 | 39.8 | 33.3 | 34.0 | 36.3 | 38.8 | 32.5 | 33.2 | 35.5 | 37.9 | 31.7 | 32.4 | 34.6 | 37.0 | 30.1 | 30.8 | 32.9 | 35.1 | 27.9 | 28.5 | 30.4 | 32.5 |
| | S/T | 0.86 | 0.81 | 0.66 | 0.49 | 0.89 | 0.84 | 0.68 | 0.51 | 0.91 | 0.86 | 0.70 | 0.52 | 0.94 | 0.88 | 0.72 | 0.54 | 0.98 | 0.92 | 0.75 | 0.56 | 0.99 | 0.93 | 0.75 | 0.56 |
| | ΔT | 26 | 25 | 21 | 17 | 26 | 25 | 22 | 17 | 26 | 25 | 22 | 17 | 26 | 25 | 22 | 17 | 26 | 25 | 22 | 17 | 24 | 23 | 20 | 16 |
| kW | 2.36 | 2.41 | 2.48 | 2.56 | 2.53 | 2.58 | 2.66 | 2.74 | 2.68 | 2.74 | 2.82 | 2.91 | 2.81 | 2.87 | 2.96 | 3.06 | 2.93 | 2.99 | 3.08 | 3.18 | 3.02 | 3.09 | 3.19 | 3.29 | |
| Amps | 8.7 | 8.9 | 9.2 | 9.5 | 9.4 | 9.6 | 9.9 | 10.3 | 10.2 | 10.4 | 10.7 | 11.1 | 10.8 | 11.1 | 11.4 | 11.8 | 11.5 | 11.8 | 12.1 | 12.6 | 12.2 | 12.4 | 12.8 | 13.3 | |
| Hi PR | 221 | 237 | 251 | 261 | 248 | 266 | 281 | 293 | 282 | 303 | 320 | 334 | 321 | 345 | 364 | 380 | 361 | 388 | 410 | 428 | 399 | 429 | 453 | 472 | |
| Lo PR | 106 | 113 | 123 | 131 | 112 | 119 | 130 | 139 | 117 | 124 | 136 | 144 | 123 | 130 | 142 | 152 | 128 | 137 | 149 | 159 | 133 | 141 | 154 | 164 | |
| MBh | 31.4 | 32.1 | 34.3 | 36.7 | 30.7 | 31.4 | 33.5 | 35.8 | 30.0 | 30.6 | 32.7 | 35.0 | 29.3 | 29.9 | 31.9 | 34.1 | 27.8 | 28.4 | 30.3 | 32.4 | 25.7 | 26.3 | 28.1 | 30.0 | |
| S/T | 0.83 | 0.78 | 0.63 | 0.47 | 0.86 | 0.81 | 0.66 | 0.49 | 0.88 | 0.83 | 0.67 | 0.50 | 0.91 | 0.85 | 0.69 | 0.52 | 0.94 | 0.89 | 0.72 | 0.54 | 0.95 | 0.89 | 0.73 | 0.54 | |
| ΔT | 26 | 25 | 22 | 17 | 26 | 25 | 22 | 18 | 26 | 25 | 22 | 18 | 27 | 26 | 22 | 18 | 27 | 26 | 22 | 17 | 25 | 23 | 20 | 16 | |
| kW | 2.31 | 2.36 | 2.42 | 2.50 | 2.47 | 2.52 | 2.60 | 2.68 | 2.62 | 2.67 | 2.76 | 2.84 | 2.75 | 2.81 | 2.89 | 2.98 | 2.86 | 2.92 | 3.01 | 3.10 | 2.95 | 3.01 | 3.11 | 3.21 | |
| Amps | 8.5 | 8.7 | 9.0 | 9.3 | 9.1 | 9.4 | 9.6 | 10.0 | 9.9 | 10.1 | 10.4 | 10.8 | 10.5 | 10.8 | 11.1 | 11.5 | 11.2 | 11.5 | 11.8 | 12.2 | 11.8 | 12.1 | 12.5 | 13.0 | |
| Hi PR | 214 | 230 | 243 | 254 | 240 | 258 | 273 | 285 | 273 | 294 | 310 | 324 | 311 | 335 | 353 | 369 | 350 | 377 | 398 | 415 | 387 | 416 | 439 | 458 | |
| Lo PR | 103 | 110 | 120 | 127 | 109 | 116 | 126 | 135 | 113 | 120 | 131 | 140 | 119 | 126 | 138 | 147 | 125 | 133 | 145 | 154 | 129 | 137 | 150 | 159 | |

| | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 85 | MBh | 35.71 | 36.40 | 38.12 | 40.67 | 34.88 | 35.55 | 37.23 | 39.72 | 34.04 | 34.70 | 36.35 | 38.78 | 33.21 | 33.86 | 35.46 | 37.83 | 31.55 | 32.16 | 33.69 | 35.94 | 29.23 | 29.79 | 31.20 | 33.29 |
| | S/T | 0.95 | 0.91 | 0.82 | 0.67 | 0.98 | 0.95 | 0.85 | 0.69 | 1.00 | 0.97 | 0.87 | 0.71 | 1.00 | 1.00 | 0.90 | 0.73 | 1.00 | 1.00 | 0.94 | 0.76 | 1.00 | 1.00 | 0.94 | 0.77 |
| | ΔT | 26 | 26 | 24 | 21 | 27 | 26 | 25 | 21 | 26 | 26 | 25 | 21 | 26 | 26 | 25 | 21 | 25 | 25 | 25 | 21 | 23 | 23 | 23 | 20 |
| | kW | 2.40 | 2.45 | 2.52 | 2.59 | 2.57 | 2.62 | 2.70 | 2.79 | 2.72 | 2.78 | 2.87 | 2.96 | 2.86 | 2.92 | 3.01 | 3.11 | 2.97 | 3.04 | 3.13 | 3.23 | 3.07 | 3.14 | 3.24 | 3.34 |
| | Amps | 8.9 | 9.1 | 9.4 | 9.7 | 9.6 | 9.8 | 10.1 | 10.4 | 10.3 | 10.6 | 10.9 | 11.3 | 11.0 | 11.3 | 11.6 | 12.1 | 11.7 | 12.0 | 12.4 | 12.8 | 12.4 | 12.7 | 13.1 | 13.6 |
| | Hi PR | 225 | 242 | 256 | 267 | 253 | 272 | 287 | 299 | 287 | 309 | 326 | 340 | 327 | 352 | 372 | 388 | 368 | 396 | 418 | 436 | 407 | 438 | 462 | 482 |
| | Lo PR | 108 | 115 | 126 | 134 | 115 | 122 | 133 | 142 | 119 | 127 | 138 | 147 | 125 | 133 | 145 | 155 | 131 | 139 | 152 | 162 | 136 | 144 | 157 | 168 |
| | MBh | 34.7 | 35.3 | 37.0 | 39.5 | 33.9 | 34.5 | 36.1 | 38.6 | 33.1 | 33.7 | 35.3 | 37.6 | 32.2 | 32.9 | 34.4 | 36.7 | 30.6 | 31.2 | 32.7 | 34.9 | 28.4 | 28.9 | 30.3 | 32.3 |
| | S/T | 0.90 | 0.87 | 0.79 | 0.64 | 0.93 | 0.90 | 0.81 | 0.66 | 0.96 | 0.92 | 0.83 | 0.68 | 0.99 | 0.95 | 0.86 | 0.70 | 1.00 | 0.99 | 0.89 | 0.73 | 1.00 | 1.00 | 0.90 | 0.73 |
| | ΔT | 27 | 27 | 25 | 22 | 28 | 27 | 26 | 22 | 28 | 27 | 26 | 22 | 28 | 27 | 26 | 22 | 27 | 27 | 26 | 22 | 25 | 25 | 24 | 21 |
| kW | 2.38 | 2.43 | 2.50 | 2.57 | 2.55 | 2.60 | 2.68 | 2.77 | 2.70 | 2.76 | 2.84 | 2.93 | 2.84 | 2.90 | 2.99 | 3.08 | 2.95 | 3.01 | 3.11 | 3.21 | 3.05 | 3.11 | 3.21 | 3.32 | |
| Amps | 8.8 | 9.0 | 9.3 | 9.6 | 9.5 | 9.7 | 10.0 | 10.3 | 10.3 | 10.5 | 10.8 | 11.2 | 10.9 | 11.2 | 11.5 | 12.0 | 11.6 | 11.9 | 12.3 | 12.7 | 12.3 | 12.5 | 13.0 | 13.4 | |
| Hi PR | 223 | 240 | 253 | 264 | 250 | 269 | 284 | 296 | 284 | 306 | 323 | 337 | 324 | 349 | 368 | 384 | 364 | 392 | 414 | 432 | 403 | 433 | 457 | 477 | |
| Lo PR | 107 | 114 | 125 | 133 | 113 | 121 | 132 | 140 | 118 | 125 | 137 | 146 | 124 | 132 | 144 | 153 | 130 | 138 | 151 | 160 | 134 | 143 | 156 | 166 | |
| MBh | 32.0 | 32.6 | 34.2 | 36.4 | 31.3 | 31.9 | 33.4 | 35.6 | 30.5 | 31.1 | 32.6 | 34.7 | 29.8 | 30.3 | 31.8 | 33.9 | 28.3 | 28.8 | 30.2 | 32.2 | 26.2 | 26.7 | 28.0 | 29.8 | |
| S/T | 0.87 | 0.84 | 0.76 | 0.61 | 0.90 | 0.87 | 0.78 | 0.64 | 0.92 | 0.89 | 0.80 | 0.65 | 0.95 | 0.92 | 0.83 | 0.67 | 0.99 | 0.95 | 0.86 | 0.70 | 1.00 | 0.96 | 0.87 | 0.71 | |
| ΔT | 28 | 27 | 26 | 22 | 28 | 28 | 26 | 23 | 28 | 28 | 26 | 23 | 28 | 28 | 26 | 23 | 28 | 28 | 26 | 23 | 26 | 26 | 24 | 21 | |
| kW | 2.33 | 2.37 | 2.44 | 2.52 | 2.49 | 2.54 | 2.62 | 2.70 | 2.64 | 2.69 | 2.78 | 2.86 | 2.77 | 2.83 | 2.92 | 3.01 | 2.88 | 2.94 | 3.03 | 3.13 | 2.98 | 3.04 | 3.13 | 3.24 | |
| Amps | 8.6 | 8.8 | 9.0 | 9.4 | 9.2 | 9.4 | 9.7 | 10.1 | 10.0 | 10.2 | 10.5 | 10.9 | 10.6 | 10.9 | 11.2 | 11.6 | 11.3 | 11.6 | 11.9 | 12.4 | 11.9 | 12.2 | 12.6 | 13.1 | |
| Hi PR | 216 | 233 | 246 | 256 | 243 | 261 | 276 | 287 | 276 | 297 | 313 | 327 | 314 | 338 | 357 | 372 | 353 | 380 | 402 | 419 | 391 | 420 | 444 | 463 | |
| Lo PR | 104 | 111 | 121 | 129 | 110 | 117 | 128 | 136 | 114 | 122 | 133 | 141 | 120 | 128 | 139 | 149 | 126 | 134 | 146 | 156 | 130 | 138 | 151 | 161 | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects AHRI (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp. +fan)

EXPANDED COOLING DATA — SSZ140361B* / AR*F374316B*

| IDB | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | ENTERING INDOOR WET BULB TEMPERATURE | | | | | | | | | | | |
|-------|---------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|--------------------------------------|------|------|------|-------|------|------|------|-------|------|------|------|
| | | 65°F | | | | 75°F | | | | 85°F | | | | 95°F | | | | 105°F | | | | 115°F | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 |
| 70 | MBh | 30.7 | 31.9 | 34.9 | - | 30.0 | 31.1 | 34.1 | - | 29.3 | 30.4 | 33.3 | - | 28.6 | 29.6 | 32.5 | - | 27.2 | 28.2 | 30.8 | - | 25.2 | 26.1 | 28.6 | - |
| | S/T | 0.72 | 0.60 | 0.42 | - | 0.75 | 0.63 | 0.43 | - | 0.77 | 0.64 | 0.45 | - | 0.79 | 0.66 | 0.46 | - | 0.82 | 0.69 | 0.48 | - | 0.83 | 0.69 | 0.48 | - |
| | ΔT | 19 | 16 | 12 | - | 19 | 16 | 12 | - | 19 | 16 | 12 | - | 19 | 17 | 13 | - | 19 | 16 | 12 | - | 18 | 15 | 12 | - |
| | kW | 2.27 | 2.31 | 2.38 | - | 2.42 | 2.47 | 2.54 | - | 2.56 | 2.61 | 2.68 | - | 2.67 | 2.73 | 2.81 | - | 2.77 | 2.83 | 2.91 | - | 2.86 | 2.92 | 3.01 | - |
| | Amps | 8.3 | 8.4 | 8.7 | - | 8.9 | 9.1 | 9.3 | - | 9.6 | 9.8 | 10.1 | - | 10.2 | 10.4 | 10.7 | - | 10.8 | 11.0 | 11.4 | - | 11.4 | 11.6 | 12.0 | - |
| | Hi PR | 223 | 240 | 254 | - | 251 | 270 | 285 | - | 285 | 307 | 324 | - | 325 | 349 | 369 | - | 365 | 393 | 415 | - | 403 | 434 | 458 | - |
| | Lo PR | 108 | 115 | 126 | - | 114 | 122 | 133 | - | 119 | 126 | 138 | - | 125 | 133 | 145 | - | 131 | 139 | 152 | - | 135 | 144 | 157 | - |
| | MBh | 33.3 | 34.5 | 37.8 | - | 32.5 | 33.7 | 36.9 | - | 31.7 | 32.9 | 36.1 | - | 31.0 | 32.1 | 35.2 | - | 29.4 | 30.5 | 33.4 | - | 27.3 | 28.3 | 31.0 | - |
| | S/T | 0.75 | 0.63 | 0.43 | - | 0.78 | 0.65 | 0.45 | - | 0.80 | 0.67 | 0.46 | - | 0.82 | 0.69 | 0.48 | - | 0.86 | 0.71 | 0.49 | - | 0.86 | 0.72 | 0.50 | - |
| | ΔT | 18 | 16 | 12 | - | 19 | 16 | 12 | - | 19 | 16 | 12 | - | 19 | 16 | 12 | - | 19 | 16 | 12 | - | 17 | 15 | 11 | - |
| kW | 2.32 | 2.36 | 2.43 | - | 2.48 | 2.52 | 2.59 | - | 2.61 | 2.66 | 2.74 | - | 2.74 | 2.79 | 2.87 | - | 2.84 | 2.90 | 2.98 | - | 2.93 | 2.99 | 3.08 | - | |
| Amps | 8.5 | 8.7 | 8.9 | - | 9.1 | 9.3 | 9.6 | - | 9.8 | 10.0 | 10.3 | - | 10.4 | 10.7 | 11.0 | - | 11.1 | 11.3 | 11.7 | - | 11.7 | 11.9 | 12.3 | - | |
| Hi PR | 230 | 248 | 262 | - | 258 | 278 | 294 | - | 294 | 316 | 334 | - | 335 | 360 | 380 | - | 376 | 405 | 428 | - | 416 | 448 | 473 | - | |
| Lo PR | 111 | 119 | 129 | - | 118 | 125 | 137 | - | 122 | 130 | 142 | - | 129 | 137 | 149 | - | 135 | 143 | 156 | - | 139 | 148 | 162 | - | |
| MBh | 34.3 | 35.5 | 38.9 | - | 33.5 | 34.7 | 38.0 | - | 32.7 | 33.9 | 37.1 | - | 31.9 | 33.1 | 36.2 | - | 30.3 | 31.4 | 34.4 | - | 28.1 | 29.1 | 31.9 | - | |
| S/T | 0.79 | 0.66 | 0.46 | - | 0.82 | 0.68 | 0.47 | - | 0.84 | 0.70 | 0.48 | - | 0.86 | 0.72 | 0.50 | - | 0.90 | 0.75 | 0.52 | - | 0.90 | 0.76 | 0.52 | - | |
| ΔT | 18 | 15 | 12 | - | 18 | 16 | 12 | - | 18 | 16 | 12 | - | 18 | 16 | 12 | - | 18 | 15 | 12 | - | 17 | 14 | 11 | - | |
| kW | 2.34 | 2.38 | 2.45 | - | 2.49 | 2.54 | 2.61 | - | 2.63 | 2.68 | 2.76 | - | 2.76 | 2.81 | 2.89 | - | 2.86 | 2.92 | 3.00 | - | 2.95 | 3.01 | 3.10 | - | |
| Amps | 8.5 | 8.7 | 9.0 | - | 9.2 | 9.4 | 9.7 | - | 9.9 | 10.1 | 10.4 | - | 10.5 | 10.8 | 11.1 | - | 11.2 | 11.4 | 11.8 | - | 11.8 | 12.1 | 12.4 | - | |
| Hi PR | 233 | 250 | 264 | - | 261 | 281 | 296 | - | 297 | 319 | 337 | - | 338 | 364 | 384 | - | 380 | 409 | 432 | - | 420 | 452 | 477 | - | |
| Lo PR | 113 | 120 | 131 | - | 119 | 127 | 138 | - | 124 | 132 | 144 | - | 130 | 138 | 151 | - | 136 | 145 | 158 | - | 141 | 150 | 163 | - | |
| 75 | MBh | 31.3 | 32.2 | 34.8 | 37.4 | 30.5 | 31.4 | 34.0 | 36.5 | 29.8 | 30.7 | 33.2 | 35.6 | 29.1 | 29.9 | 32.4 | 34.8 | 27.6 | 28.4 | 30.8 | 33.0 | 25.6 | 26.3 | 28.5 | 30.6 |
| | S/T | 0.82 | 0.74 | 0.56 | 0.36 | 0.85 | 0.76 | 0.58 | 0.37 | 0.87 | 0.78 | 0.59 | 0.38 | 0.90 | 0.81 | 0.61 | 0.39 | 0.94 | 0.84 | 0.63 | 0.41 | 0.95 | 0.85 | 0.64 | 0.41 |
| | ΔT | 22 | 20 | 16 | 11 | 22 | 20 | 17 | 11 | 22 | 20 | 17 | 11 | 22 | 20 | 17 | 12 | 22 | 20 | 16 | 11 | 20 | 19 | 15 | 11 |
| | kW | 2.29 | 2.33 | 2.39 | 2.46 | 2.44 | 2.49 | 2.56 | 2.63 | 2.58 | 2.63 | 2.70 | 2.78 | 2.69 | 2.75 | 2.83 | 2.91 | 2.80 | 2.85 | 2.94 | 3.03 | 2.88 | 2.94 | 3.03 | 3.12 |
| | Amps | 8.3 | 8.5 | 8.8 | 9.1 | 8.9 | 9.1 | 9.4 | 9.7 | 9.6 | 9.9 | 10.2 | 10.5 | 10.3 | 10.5 | 10.8 | 11.2 | 10.9 | 11.1 | 11.5 | 11.9 | 11.5 | 11.7 | 12.1 | 12.5 |
| | Hi PR | 226 | 243 | 256 | 267 | 253 | 272 | 288 | 300 | 288 | 310 | 327 | 341 | 328 | 353 | 373 | 389 | 369 | 397 | 419 | 437 | 408 | 439 | 463 | 483 |
| | Lo PR | 109 | 116 | 127 | 135 | 115 | 123 | 134 | 143 | 120 | 128 | 139 | 148 | 126 | 134 | 146 | 156 | 132 | 140 | 153 | 163 | 137 | 145 | 159 | 169 |
| | MBh | 33.9 | 34.9 | 37.7 | 40.5 | 33.1 | 34.1 | 36.9 | 39.6 | 32.3 | 33.2 | 36.0 | 38.6 | 31.5 | 32.4 | 35.1 | 37.7 | 29.9 | 30.8 | 33.3 | 35.8 | 27.7 | 28.5 | 30.9 | 33.2 |
| | S/T | 0.85 | 0.76 | 0.58 | 0.37 | 0.88 | 0.79 | 0.60 | 0.39 | 0.91 | 0.81 | 0.61 | 0.40 | 0.94 | 0.84 | 0.63 | 0.41 | 0.97 | 0.87 | 0.66 | 0.42 | 0.98 | 0.88 | 0.66 | 0.43 |
| | ΔT | 21 | 20 | 16 | 11 | 22 | 20 | 16 | 11 | 22 | 20 | 16 | 11 | 22 | 20 | 16 | 11 | 21 | 20 | 16 | 11 | 20 | 18 | 15 | 10 |
| kW | 2.34 | 2.38 | 2.45 | 2.52 | 2.49 | 2.54 | 2.61 | 2.69 | 2.63 | 2.68 | 2.76 | 2.84 | 2.76 | 2.81 | 2.89 | 2.98 | 2.86 | 2.92 | 3.01 | 3.10 | 2.95 | 3.01 | 3.10 | 3.20 | |
| Amps | 8.5 | 8.7 | 9.0 | 9.3 | 9.2 | 9.4 | 9.7 | 10.0 | 9.9 | 10.1 | 10.4 | 10.8 | 10.5 | 10.8 | 11.1 | 11.5 | 11.2 | 11.4 | 11.8 | 12.2 | 11.8 | 12.1 | 12.4 | 12.9 | |
| Hi PR | 233 | 250 | 264 | 276 | 261 | 281 | 297 | 309 | 297 | 319 | 337 | 352 | 338 | 364 | 384 | 401 | 380 | 409 | 432 | 451 | 420 | 452 | 477 | 498 | |
| Lo PR | 113 | 120 | 131 | 139 | 119 | 127 | 138 | 147 | 124 | 132 | 144 | 153 | 130 | 138 | 151 | 161 | 136 | 145 | 158 | 168 | 141 | 150 | 164 | 174 | |
| MBh | 34.9 | 35.9 | 38.9 | 41.7 | 34.1 | 35.1 | 38.0 | 40.7 | 33.3 | 34.2 | 37.1 | 39.8 | 32.4 | 33.4 | 36.2 | 38.8 | 30.8 | 31.7 | 34.4 | 36.9 | 28.6 | 29.4 | 31.8 | 34.2 | |
| S/T | 0.90 | 0.80 | 0.61 | 0.39 | 0.93 | 0.83 | 0.63 | 0.40 | 0.95 | 0.85 | 0.64 | 0.41 | 0.98 | 0.88 | 0.66 | 0.43 | 1.00 | 0.91 | 0.69 | 0.44 | 1.00 | 0.92 | 0.70 | 0.45 | |
| ΔT | 21 | 19 | 15 | 11 | 21 | 19 | 16 | 11 | 21 | 19 | 16 | 11 | 21 | 19 | 16 | 11 | 20 | 19 | 16 | 11 | 19 | 18 | 15 | 10 | |
| kW | 2.35 | 2.40 | 2.46 | 2.53 | 2.51 | 2.56 | 2.63 | 2.71 | 2.65 | 2.70 | 2.78 | 2.87 | 2.78 | 2.83 | 2.92 | 3.00 | 2.88 | 2.94 | 3.03 | 3.12 | 2.97 | 3.03 | 3.13 | 3.22 | |
| Amps | 8.6 | 8.8 | 9.1 | 9.4 | 9.2 | 9.4 | 9.7 | 10.1 | 10.0 | 10.2 | 10.5 | 10.9 | 10.6 | 10.9 | 11.2 | 11.6 | 11.3 | 11.5 | 11.9 | 12.3 | 11.9 | 12.2 | 12.5 | 13.0 | |
| Hi PR | 235 | 253 | 267 | 278 | 264 | 284 | 300 | 312 | 300 | 323 | 341 | 355 | 341 | 367 | 388 | 405 | 384 | 413 | 436 | 455 | 424 | 457 | 482 | 503 | |
| Lo PR | 114 | 121 | 132 | 141 | 120 | 128 | 140 | 149 | 125 | 133 | 145 | 154 | 131 | 140 | 152 | 162 | 137 | 146 | 160 | 170 | 142 | 151 | 165 | 176 | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects ACCA (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp. + fan)

EXPANDED COOLING DATA — SSZ140361B* / AR*F374316B* (CONT.)

| IDB | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | ENTERING INDOOR WET BULB TEMPERATURE | | | | | | | | | | | | | |
|------|---------|-----------------------------|-------|------|------|------|------|------|------|------|------|------|------|--------------------------------------|------|------|------|-------|------|------|------|-------|------|------|------|------|------|
| | | 65°F | | | | 75°F | | | | 85°F | | | | 95°F | | | | 105°F | | | | 115°F | | | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | | |
| 80 | 1090 | MBh | 31.8 | 32.5 | 34.7 | 37.1 | 31.1 | 31.7 | 33.9 | 36.3 | 30.3 | 31.0 | 33.1 | 35.4 | 29.6 | 30.2 | 32.3 | 34.5 | 28.1 | 28.7 | 30.7 | 32.8 | 26.0 | 26.6 | 28.4 | 30.4 | |
| | | S/T | 0.90 | 0.85 | 0.69 | 0.52 | 0.94 | 0.88 | 0.71 | 0.53 | 0.96 | 0.90 | 0.73 | 0.55 | 0.99 | 0.93 | 0.76 | 0.57 | 1.03 | 0.96 | 0.78 | 0.59 | 1.04 | 0.97 | 0.79 | 0.59 | |
| | | ΔT | 24 | 23 | 20 | 16 | 25 | 24 | 20 | 16 | 25 | 24 | 20 | 16 | 25 | 24 | 21 | 16 | 24 | 23 | 20 | 16 | 23 | 22 | 19 | 15 | |
| | 1250 | kW | 2.30 | 2.35 | 2.41 | 2.48 | 2.46 | 2.50 | 2.58 | 2.65 | 2.59 | 2.64 | 2.72 | 2.80 | 2.71 | 2.77 | 2.85 | 2.94 | 2.82 | 2.87 | 2.96 | 3.05 | 2.91 | 2.96 | 3.05 | 3.15 | |
| | | Amps | 8.4 | 8.6 | 8.8 | 9.1 | 9.0 | 9.2 | 9.5 | 9.8 | 9.7 | 9.9 | 10.3 | 10.6 | 10.3 | 10.6 | 10.9 | 11.3 | 11.0 | 11.2 | 11.6 | 12.0 | 11.6 | 11.8 | 12.2 | 12.7 | |
| | | Hi PR | 228 | 245 | 259 | 270 | 256 | 275 | 291 | 303 | 291 | 313 | 330 | 345 | 331 | 356 | 376 | 393 | 373 | 401 | 423 | 442 | 412 | 443 | 468 | 488 | |
| | 1400 | Lo PR | 110 | 117 | 128 | 136 | 117 | 124 | 135 | 144 | 121 | 129 | 141 | 150 | 127 | 135 | 148 | 157 | 133 | 142 | 155 | 165 | 138 | 147 | 160 | 171 | |
| | | MBh | 34.5 | 35.2 | 37.6 | 40.2 | 33.7 | 34.4 | 36.8 | 39.3 | 32.9 | 33.6 | 35.9 | 38.4 | 32.1 | 32.8 | 35.0 | 37.4 | 30.5 | 31.1 | 33.3 | 35.5 | 28.2 | 28.8 | 30.8 | 32.9 | |
| | | S/T | 0.94 | 0.88 | 0.71 | 0.53 | 0.97 | 0.91 | 0.74 | 0.55 | 1.00 | 0.93 | 0.76 | 0.57 | 1.00 | 0.96 | 0.78 | 0.59 | 1.00 | 1.00 | 0.81 | 0.61 | 1.00 | 1.00 | 0.82 | 0.61 | |
| | 85 | 1090 | ΔT | 24 | 23 | 20 | 16 | 24 | 23 | 20 | 16 | 24 | 23 | 20 | 16 | 24 | 23 | 20 | 16 | 22 | 21 | 19 | 15 | 21 | 20 | 17 | 14 |
| | | | kW | 2.35 | 2.40 | 2.46 | 2.53 | 2.51 | 2.56 | 2.63 | 2.71 | 2.65 | 2.70 | 2.78 | 2.87 | 2.78 | 2.83 | 2.92 | 3.00 | 2.88 | 2.94 | 3.03 | 3.12 | 2.97 | 3.03 | 3.13 | 3.22 |
| | | | Amps | 8.6 | 8.8 | 9.1 | 9.4 | 9.2 | 9.4 | 9.7 | 10.1 | 10.0 | 10.2 | 10.5 | 10.9 | 10.6 | 10.9 | 11.2 | 11.6 | 11.3 | 11.5 | 11.9 | 12.3 | 11.9 | 12.2 | 12.5 | 13.0 |
| 1250 | | Hi PR | 235 | 253 | 267 | 278 | 264 | 284 | 300 | 312 | 300 | 323 | 341 | 355 | 341 | 367 | 388 | 405 | 384 | 413 | 437 | 455 | 424 | 457 | 482 | 503 | |
| | | Lo PR | 114 | 121 | 132 | 141 | 120 | 128 | 140 | 149 | 125 | 133 | 145 | 154 | 131 | 140 | 152 | 162 | 137 | 146 | 160 | 170 | 142 | 151 | 165 | 176 | |
| | | MBh | 35.5 | 36.3 | 38.8 | 41.4 | 34.7 | 35.4 | 37.9 | 40.5 | 33.8 | 34.6 | 37.0 | 39.5 | 33.0 | 33.7 | 36.1 | 38.5 | 31.4 | 32.1 | 34.2 | 36.6 | 29.1 | 29.7 | 31.7 | 33.9 | |
| 1400 | | S/T | 1.00 | 0.92 | 0.75 | 0.56 | 1.00 | 0.95 | 0.78 | 0.58 | 1.00 | 1.00 | 0.80 | 0.60 | 1.00 | 1.00 | 0.82 | 0.61 | 1.00 | 1.00 | 0.85 | 0.64 | 1.00 | 1.00 | 0.86 | 0.64 | |
| | | ΔT | 23 | 22 | 19 | 15 | 23 | 22 | 19 | 15 | 22 | 23 | 19 | 15 | 22 | 22 | 19 | 16 | 21 | 21 | 19 | 15 | 19 | 19 | 18 | 14 | |
| | | kW | 2.37 | 2.41 | 2.48 | 2.55 | 2.53 | 2.58 | 2.65 | 2.73 | 2.67 | 2.72 | 2.80 | 2.89 | 2.80 | 2.85 | 2.94 | 3.03 | 2.90 | 2.96 | 3.05 | 3.15 | 3.00 | 3.06 | 3.15 | 3.25 | |
| 85 | | 1090 | Amps | 8.7 | 8.9 | 9.1 | 9.4 | 9.3 | 9.5 | 9.8 | 10.2 | 10.1 | 10.3 | 10.6 | 11.0 | 10.7 | 11.0 | 11.3 | 11.7 | 11.4 | 11.6 | 12.0 | 12.4 | 12.0 | 12.3 | 12.7 | 13.1 |
| | | | Hi PR | 237 | 255 | 270 | 281 | 266 | 286 | 303 | 316 | 303 | 326 | 344 | 359 | 345 | 371 | 392 | 409 | 388 | 417 | 441 | 460 | 429 | 461 | 487 | 508 |
| | | | Lo PR | 115 | 122 | 133 | 142 | 121 | 129 | 141 | 150 | 126 | 134 | 146 | 156 | 132 | 141 | 154 | 164 | 139 | 148 | 161 | 172 | 144 | 153 | 167 | 178 |
| | 1250 | MBh | 32.4 | 33.0 | 34.6 | 36.9 | 31.6 | 32.2 | 33.8 | 36.0 | 30.9 | 31.5 | 32.9 | 35.1 | 30.1 | 30.7 | 32.1 | 34.3 | 28.6 | 29.2 | 30.5 | 32.6 | 26.5 | 27.0 | 28.3 | 30.2 | |
| | | S/T | 0.95 | 0.91 | 0.82 | 0.67 | 0.98 | 0.95 | 0.85 | 0.69 | 1.00 | 0.97 | 0.88 | 0.71 | 1.00 | 1.00 | 0.90 | 0.73 | 1.00 | 1.00 | 0.94 | 0.76 | 1.00 | 1.00 | 0.95 | 0.77 | |
| | | ΔT | 26 | 25 | 24 | 21 | 26 | 26 | 24 | 21 | 26 | 26 | 24 | 21 | 25 | 26 | 25 | 21 | 24 | 25 | 24 | 21 | 22 | 23 | 23 | 20 | |
| | 1400 | kW | 2.32 | 2.36 | 2.43 | 2.50 | 2.48 | 2.52 | 2.59 | 2.67 | 2.61 | 2.66 | 2.74 | 2.82 | 2.73 | 2.79 | 2.87 | 2.96 | 2.84 | 2.90 | 2.98 | 3.07 | 2.93 | 2.99 | 3.08 | 3.17 | |
| | | Amps | 8.5 | 8.6 | 8.9 | 9.2 | 9.1 | 9.3 | 9.6 | 9.9 | 9.8 | 10.0 | 10.3 | 10.7 | 10.4 | 10.7 | 11.0 | 11.4 | 11.1 | 11.3 | 11.7 | 12.1 | 11.7 | 11.9 | 12.3 | 12.8 | |
| | | Hi PR | 230 | 248 | 262 | 273 | 258 | 278 | 293 | 306 | 294 | 316 | 334 | 348 | 335 | 360 | 380 | 396 | 376 | 405 | 428 | 446 | 416 | 447 | 472 | 493 | |
| | 85 | 1090 | Lo PR | 111 | 119 | 129 | 138 | 118 | 125 | 137 | 146 | 122 | 130 | 142 | 151 | 129 | 137 | 149 | 159 | 135 | 143 | 156 | 167 | 139 | 148 | 162 | 172 |
| | | | MBh | 35.1 | 35.7 | 37.4 | 39.9 | 34.3 | 34.9 | 36.6 | 39.0 | 33.4 | 34.1 | 35.7 | 38.1 | 32.6 | 33.3 | 34.8 | 37.2 | 31.0 | 31.6 | 33.1 | 35.3 | 28.7 | 29.3 | 30.6 | 32.7 |
| | | | S/T | 0.98 | 0.95 | 0.85 | 0.69 | 1.00 | 0.98 | 0.89 | 0.72 | 1.00 | 1.00 | 0.91 | 0.74 | 1.00 | 1.00 | 0.94 | 0.76 | 1.00 | 1.00 | 0.97 | 0.79 | 1.00 | 1.00 | 0.98 | 0.80 |
| 1250 | | ΔT | 25 | 25 | 24 | 20 | 25 | 25 | 24 | 21 | 25 | 25 | 24 | 21 | 24 | 24 | 24 | 21 | 23 | 23 | 24 | 20 | 21 | 22 | 22 | 19 | |
| | | kW | 2.37 | 2.41 | 2.48 | 2.55 | 2.53 | 2.58 | 2.65 | 2.73 | 2.67 | 2.72 | 2.80 | 2.89 | 2.80 | 2.85 | 2.94 | 3.03 | 2.90 | 2.96 | 3.05 | 3.15 | 3.00 | 3.06 | 3.15 | 3.25 | |
| | | Amps | 8.7 | 8.9 | 9.1 | 9.4 | 9.3 | 9.5 | 9.8 | 10.2 | 10.1 | 10.3 | 10.6 | 11.0 | 10.7 | 11.0 | 11.3 | 11.7 | 11.4 | 11.6 | 12.0 | 12.4 | 12.0 | 12.3 | 12.7 | 13.1 | |
| 1400 | | Hi PR | 237 | 255 | 270 | 281 | 266 | 286 | 303 | 316 | 303 | 326 | 344 | 359 | 345 | 371 | 392 | 409 | 388 | 417 | 441 | 460 | 429 | 461 | 487 | 508 | |
| | | Lo PR | 115 | 122 | 133 | 142 | 121 | 129 | 141 | 150 | 126 | 134 | 146 | 156 | 132 | 141 | 154 | 164 | 139 | 148 | 161 | 172 | 144 | 153 | 167 | 178 | |
| | | MBh | 36.1 | 36.8 | 38.6 | 41.1 | 35.3 | 36.0 | 37.7 | 40.2 | 34.4 | 35.1 | 36.8 | 39.2 | 33.6 | 34.2 | 35.9 | 38.3 | 31.9 | 32.5 | 34.1 | 36.4 | 29.6 | 30.1 | 31.6 | 33.7 | |
| 1400 | | S/T | 1.00 | 0.99 | 0.90 | 0.73 | 1.00 | 1.00 | 0.93 | 0.75 | 1.00 | 1.00 | 0.95 | 0.77 | 1.00 | 1.00 | 0.98 | 0.80 | 1.00 | 1.00 | 1.00 | 0.83 | 1.00 | 1.00 | 1.00 | 0.83 | |
| | | ΔT | 24 | 24 | 23 | 20 | 23 | 24 | 23 | 20 | 23 | 23 | 23 | 20 | 22 | 22 | 23 | 20 | 21 | 21 | 22 | 20 | 19 | 20 | 21 | 18 | |
| | | kW | 2.39 | 2.43 | 2.50 | 2.57 | 2.55 | 2.60 | 2.67 | 2.75 | 2.69 | 2.74 | 2.83 | 2.91 | 2.82 | 2.87 | 2.96 | 3.05 | 2.93 | 2.99 | 3.08 | 3.17 | 3.02 | 3.08 | 3.17 | 3.27 | |
| 1400 | Amps | 8.7 | 8.9 | 9.2 | 9.5 | 9.4 | 9.6 | 9.9 | 10.2 | 10.2 | 10.4 | 10.7 | 11.1 | 10.8 | 11.0 | 11.4 | 11.8 | 11.5 | 11.7 | 12.1 | 12.5 | 12.1 | 12.4 | 12.8 | 13.2 | | |
| | Hi PR | 240 | 258 | 272 | 284 | 269 | 289 | 306 | 319 | 306 | 329 | 348 | 362 | 348 | 375 | 396 | 413 | 392 | 422 | 445 | 464 | 433 | 466 | 492 | 513 | | |
| | Lo PR | 116 | 123 | 135 | 144 | 123 | 130 | 142 | 152 | 127 | 136 | 148 | 158 | 134 | 142 | 155 | 166 | 140 | 149 | 163 | 173 | 145 | 154 | 168 | 179 | | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects AHRI (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp. + fan)

EXPANDED COOLING DATA — SSZ140421A* / CA*F4860*6A* +TXV / MBR2000** -1

| IDB | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|-------|------|------|------|-------|------|------|----|
| | | 65°F | | | | 75°F | | | | 85°F | | | | 95°F | | | | 105°F | | | | 115°F | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 |
| 70 | MBh | 39.2 | 40.6 | 44.5 | - | 38.3 | 39.7 | 43.5 | - | 37.4 | 38.7 | 42.4 | - | 36.5 | 37.8 | 41.4 | - | 34.6 | 35.9 | 39.3 | - | 32.1 | 33.3 | 36.4 | - |
| | S/T | 0.77 | 0.65 | 0.45 | - | 0.80 | 0.67 | 0.46 | - | 0.82 | 0.69 | 0.48 | - | 0.85 | 0.71 | 0.49 | - | 0.88 | 0.74 | 0.51 | - | 0.89 | 0.74 | 0.51 | - |
| | ΔT | 18 | 15 | 12 | - | 18 | 16 | 12 | - | 18 | 16 | 12 | - | 18 | 16 | 12 | - | 18 | 15 | 12 | - | 17 | 14 | 11 | - |
| | kW | 2.65 | 2.71 | 2.78 | - | 2.84 | 2.90 | 2.98 | - | 3.01 | 3.07 | 3.16 | - | 3.15 | 3.22 | 3.31 | - | 3.28 | 3.34 | 3.45 | - | 3.38 | 3.45 | 3.56 | - |
| | Amps | 9.7 | 9.9 | 10.2 | - | 10.4 | 10.7 | 11.0 | - | 11.3 | 11.6 | 12.0 | - | 12.1 | 12.4 | 12.8 | - | 12.8 | 13.1 | 13.6 | - | 13.6 | 13.9 | 14.4 | - |
| | Hi PR | 218 | 234 | 247 | - | 244 | 263 | 277 | - | 278 | 299 | 315 | - | 316 | 340 | 359 | - | 356 | 383 | 404 | - | 393 | 423 | 447 | - |
| | Lo PR | 107 | 114 | 125 | - | 113 | 121 | 132 | - | 118 | 125 | 137 | - | 124 | 132 | 144 | - | 130 | 138 | 151 | - | 134 | 143 | 156 | - |
| | MBh | 38.1 | 39.4 | 43.2 | - | 37.2 | 38.5 | 42.2 | - | 36.3 | 37.6 | 41.2 | - | 35.4 | 36.7 | 40.2 | - | 33.6 | 34.9 | 38.2 | - | 31.2 | 32.3 | 35.4 | - |
| | S/T | 0.74 | 0.62 | 0.43 | - | 0.77 | 0.64 | 0.44 | - | 0.79 | 0.66 | 0.45 | - | 0.81 | 0.68 | 0.47 | - | 0.84 | 0.70 | 0.49 | - | 0.85 | 0.71 | 0.49 | - |
| | ΔT | 18 | 16 | 12 | - | 19 | 16 | 12 | - | 19 | 16 | 12 | - | 19 | 16 | 12 | - | 19 | 16 | 12 | - | 17 | 15 | 11 | - |
| | kW | 2.63 | 2.69 | 2.76 | - | 2.82 | 2.88 | 2.96 | - | 2.98 | 3.04 | 3.14 | - | 3.13 | 3.19 | 3.29 | - | 3.25 | 3.32 | 3.42 | - | 3.36 | 3.43 | 3.53 | - |
| | Amps | 9.6 | 9.8 | 10.1 | - | 10.4 | 10.6 | 10.9 | - | 11.2 | 11.5 | 11.8 | - | 12.0 | 12.2 | 12.6 | - | 12.7 | 13.0 | 13.4 | - | 13.4 | 13.8 | 14.2 | - |
| Hi PR | 215 | 232 | 245 | - | 242 | 260 | 275 | - | 275 | 296 | 312 | - | 313 | 337 | 356 | - | 352 | 379 | 400 | - | 389 | 419 | 442 | - | |
| Lo PR | 106 | 113 | 123 | - | 112 | 120 | 130 | - | 117 | 124 | 136 | - | 123 | 130 | 142 | - | 129 | 137 | 149 | - | 133 | 141 | 154 | - | |
| MBh | 35.1 | 36.4 | 39.9 | - | 34.3 | 35.6 | 39.0 | - | 33.5 | 34.7 | 38.0 | - | 32.7 | 33.9 | 37.1 | - | 31.0 | 32.2 | 35.2 | - | 28.8 | 29.8 | 32.7 | - | |
| S/T | 0.71 | 0.59 | 0.41 | - | 0.74 | 0.62 | 0.43 | - | 0.76 | 0.63 | 0.44 | - | 0.78 | 0.65 | 0.45 | - | 0.81 | 0.68 | 0.47 | - | 0.82 | 0.68 | 0.47 | - | |
| ΔT | 19 | 16 | 12 | - | 19 | 16 | 12 | - | 19 | 16 | 13 | - | 19 | 17 | 13 | - | 19 | 16 | 12 | - | 18 | 15 | 12 | - | |
| kW | 2.58 | 2.63 | 2.70 | - | 2.76 | 2.81 | 2.89 | - | 2.92 | 2.97 | 3.06 | - | 3.06 | 3.12 | 3.21 | - | 3.17 | 3.24 | 3.34 | - | 3.28 | 3.35 | 3.45 | - | |
| Amps | 9.4 | 9.6 | 9.9 | - | 10.1 | 10.3 | 10.6 | - | 10.9 | 11.2 | 11.5 | - | 11.6 | 11.9 | 12.3 | - | 12.4 | 12.7 | 13.1 | - | 13.1 | 13.4 | 13.8 | - | |
| Hi PR | 209 | 225 | 237 | - | 234 | 252 | 266 | - | 267 | 287 | 303 | - | 304 | 327 | 345 | - | 342 | 368 | 388 | - | 377 | 406 | 429 | - | |
| Lo PR | 103 | 110 | 120 | - | 109 | 116 | 127 | - | 113 | 120 | 132 | - | 119 | 127 | 138 | - | 125 | 133 | 145 | - | 129 | 137 | 150 | - | |

| | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|-------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 75 | MBh | 39.9 | 41.0 | 44.4 | 47.7 | 38.9 | 40.1 | 43.4 | 46.6 | 38.0 | 39.1 | 42.4 | 45.5 | 37.1 | 38.2 | 41.3 | 44.4 | 35.2 | 36.3 | 39.3 | 42.1 | 32.6 | 33.6 | 36.4 | 39.0 |
| | S/T | 0.88 | 0.79 | 0.60 | 0.38 | 0.91 | 0.82 | 0.62 | 0.40 | 0.94 | 0.84 | 0.63 | 0.41 | 0.97 | 0.86 | 0.65 | 0.42 | 1.00 | 0.90 | 0.68 | 0.44 | 1.00 | 0.90 | 0.68 | 0.44 |
| | ΔT | 20 | 19 | 15 | 11 | 21 | 19 | 16 | 11 | 21 | 19 | 16 | 11 | 21 | 19 | 16 | 11 | 21 | 19 | 16 | 11 | 19 | 18 | 15 | 10 |
| | kW | 2.67 | 2.73 | 2.80 | 2.89 | 2.86 | 2.92 | 3.01 | 3.10 | 3.03 | 3.09 | 3.18 | 3.28 | 3.18 | 3.24 | 3.34 | 3.45 | 3.30 | 3.37 | 3.47 | 3.58 | 3.41 | 3.48 | 3.59 | 3.70 |
| | Amps | 9.8 | 10.0 | 10.3 | 10.7 | 10.5 | 10.8 | 11.1 | 11.5 | 11.4 | 11.7 | 12.1 | 12.5 | 12.2 | 12.5 | 12.9 | 13.3 | 12.9 | 13.3 | 13.7 | 14.2 | 13.7 | 14.0 | 14.5 | 15.0 |
| | Hi PR | 220 | 236 | 250 | 260 | 247 | 265 | 280 | 292 | 280 | 302 | 319 | 332 | 319 | 344 | 363 | 379 | 359 | 387 | 408 | 426 | 397 | 427 | 451 | 471 |
| | Lo PR | 108 | 115 | 126 | 134 | 115 | 122 | 133 | 142 | 119 | 127 | 138 | 147 | 125 | 133 | 145 | 155 | 131 | 140 | 152 | 162 | 136 | 144 | 158 | 168 |
| | MBh | 38.7 | 39.8 | 43.1 | 46.3 | 37.8 | 38.9 | 42.1 | 45.2 | 36.9 | 38.0 | 41.1 | 44.1 | 36.0 | 37.1 | 40.1 | 43.1 | 34.2 | 35.2 | 38.1 | 40.9 | 31.7 | 32.6 | 35.3 | 37.9 |
| | S/T | 0.84 | 0.75 | 0.57 | 0.37 | 0.87 | 0.78 | 0.59 | 0.38 | 0.89 | 0.80 | 0.60 | 0.39 | 0.92 | 0.82 | 0.62 | 0.40 | 0.96 | 0.86 | 0.65 | 0.42 | 0.96 | 0.86 | 0.65 | 0.42 |
| | ΔT | 21 | 20 | 16 | 11 | 22 | 20 | 16 | 11 | 22 | 20 | 16 | 11 | 22 | 20 | 16 | 11 | 21 | 20 | 16 | 11 | 20 | 18 | 15 | 10 |
| | kW | 2.65 | 2.71 | 2.78 | 2.87 | 2.84 | 2.90 | 2.98 | 3.07 | 3.01 | 3.07 | 3.16 | 3.26 | 3.15 | 3.22 | 3.32 | 3.42 | 3.28 | 3.34 | 3.45 | 3.56 | 3.38 | 3.45 | 3.56 | 3.68 |
| | Amps | 9.7 | 9.9 | 10.2 | 10.6 | 10.4 | 10.7 | 11.0 | 11.4 | 11.3 | 11.6 | 12.0 | 12.4 | 12.1 | 12.4 | 12.8 | 13.2 | 12.8 | 13.1 | 13.6 | 14.1 | 13.6 | 13.9 | 14.4 | 14.9 |
| Hi PR | 218 | 234 | 247 | 258 | 244 | 263 | 277 | 289 | 278 | 299 | 316 | 329 | 316 | 340 | 359 | 375 | 356 | 383 | 404 | 422 | 393 | 423 | 447 | 466 | |
| Lo PR | 107 | 114 | 125 | 133 | 113 | 121 | 132 | 140 | 118 | 125 | 137 | 146 | 124 | 132 | 144 | 153 | 130 | 138 | 151 | 161 | 134 | 143 | 156 | 166 | |
| MBh | 35.7 | 36.8 | 39.8 | 42.7 | 34.9 | 35.9 | 38.9 | 41.7 | 34.1 | 35.1 | 38.0 | 40.7 | 33.2 | 34.2 | 37.0 | 39.7 | 31.6 | 32.5 | 35.2 | 37.8 | 29.2 | 30.1 | 32.6 | 35.0 | |
| S/T | 0.81 | 0.72 | 0.55 | 0.35 | 0.84 | 0.75 | 0.57 | 0.37 | 0.86 | 0.77 | 0.58 | 0.37 | 0.89 | 0.79 | 0.60 | 0.39 | 0.92 | 0.82 | 0.62 | 0.40 | 0.93 | 0.83 | 0.63 | 0.40 | |
| ΔT | 22 | 20 | 16 | 11 | 22 | 20 | 17 | 11 | 22 | 20 | 17 | 11 | 22 | 20 | 17 | 12 | 22 | 20 | 16 | 11 | 20 | 19 | 15 | 11 | |
| kW | 2.60 | 2.65 | 2.72 | 2.80 | 2.78 | 2.83 | 2.92 | 3.00 | 2.94 | 3.00 | 3.09 | 3.18 | 3.08 | 3.14 | 3.24 | 3.34 | 3.20 | 3.27 | 3.37 | 3.47 | 3.30 | 3.37 | 3.48 | 3.59 | |
| Amps | 9.4 | 9.7 | 10.0 | 10.3 | 10.2 | 10.4 | 10.7 | 11.1 | 11.0 | 11.3 | 11.6 | 12.1 | 11.7 | 12.0 | 12.4 | 12.9 | 12.5 | 12.8 | 13.2 | 13.7 | 13.2 | 13.5 | 14.0 | 14.5 | |
| Hi PR | 211 | 227 | 240 | 250 | 237 | 255 | 269 | 281 | 269 | 290 | 306 | 319 | 307 | 330 | 349 | 364 | 345 | 371 | 392 | 409 | 381 | 410 | 433 | 452 | |
| Lo PR | 104 | 111 | 121 | 129 | 110 | 117 | 128 | 136 | 114 | 122 | 133 | 142 | 120 | 128 | 140 | 149 | 126 | 134 | 146 | 156 | 130 | 139 | 151 | 161 | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects ACCA (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp. +fan)

EXPANDED COOLING DATA — SSZ140421A* / CA*F4860*6A* + TXV / MBR2000** -1 (CONT.)

| IDB | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | ENTERING INDOOR WET BULB TEMPERATURE | | | | | | | | | | | | |
|-------|---------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|--------------------------------------|------|------|------|-------|------|------|------|-------|------|------|------|------|
| | | 65°F | | | | 75°F | | | | 85°F | | | | 95°F | | | | 105°F | | | | 115°F | | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | |
| 80 | 1575 | MBh | 40.6 | 41.5 | 44.3 | 47.3 | 39.6 | 40.5 | 43.3 | 46.2 | 38.7 | 39.5 | 42.2 | 45.1 | 37.7 | 38.6 | 41.2 | 44.0 | 35.9 | 36.6 | 39.1 | 41.8 | 33.2 | 33.9 | 36.3 | 38.8 |
| | | S/T | 0.97 | 0.91 | 0.74 | 0.55 | 1.00 | 0.94 | 0.76 | 0.57 | 1.00 | 0.96 | 0.78 | 0.59 | 1.00 | 1.00 | 0.81 | 0.60 | 1.00 | 1.00 | 0.84 | 0.63 | 1.00 | 1.00 | 0.85 | 0.63 |
| | ΔT | 23 | 22 | 19 | 15 | 23 | 22 | 19 | 15 | 22 | 23 | 19 | 15 | 22 | 23 | 19 | 16 | 21 | 21 | 19 | 15 | 19 | 20 | 18 | 14 | |
| | kW | 2.69 | 2.75 | 2.83 | 2.91 | 2.88 | 2.94 | 3.03 | 3.12 | 3.05 | 3.11 | 3.21 | 3.31 | 3.20 | 3.27 | 3.37 | 3.47 | 3.33 | 3.40 | 3.50 | 3.61 | 3.44 | 3.51 | 3.62 | 3.73 | |
| | Amps | 9.9 | 10.1 | 10.4 | 10.8 | 10.6 | 10.9 | 11.2 | 11.6 | 11.5 | 11.8 | 12.2 | 12.6 | 12.3 | 12.6 | 13.0 | 13.5 | 13.1 | 13.4 | 13.8 | 14.3 | 13.8 | 14.2 | 14.6 | 15.2 | |
| | Hi PR | 222 | 239 | 252 | 263 | 249 | 268 | 283 | 295 | 283 | 305 | 322 | 336 | 323 | 347 | 367 | 382 | 363 | 391 | 412 | 430 | 401 | 432 | 456 | 475 | |
| | Lo PR | 110 | 117 | 127 | 136 | 116 | 123 | 134 | 143 | 120 | 128 | 140 | 149 | 126 | 134 | 147 | 156 | 132 | 141 | 154 | 164 | 137 | 146 | 159 | 169 | |
| | MBh | 39.4 | 40.2 | 43.0 | 46.0 | 38.5 | 39.3 | 42.0 | 44.9 | 37.6 | 38.4 | 41.0 | 43.8 | 36.6 | 37.4 | 40.0 | 42.8 | 34.8 | 35.6 | 38.0 | 40.6 | 32.2 | 32.9 | 35.2 | 37.6 | |
| | S/T | 0.92 | 0.86 | 0.70 | 0.53 | 0.95 | 0.90 | 0.73 | 0.54 | 0.98 | 0.92 | 0.75 | 0.56 | 1.00 | 0.95 | 0.77 | 0.58 | 1.00 | 0.98 | 0.80 | 0.60 | 1.00 | 0.99 | 0.81 | 0.60 | |
| | ΔT | 24 | 23 | 20 | 16 | 24 | 23 | 20 | 16 | 24 | 23 | 20 | 16 | 24 | 23 | 20 | 16 | 23 | 23 | 20 | 16 | 21 | 21 | 19 | 15 | |
| | kW | 2.67 | 2.73 | 2.80 | 2.89 | 2.86 | 2.92 | 3.01 | 3.10 | 3.03 | 3.09 | 3.18 | 3.28 | 3.18 | 3.24 | 3.34 | 3.45 | 3.30 | 3.37 | 3.48 | 3.59 | 3.41 | 3.48 | 3.59 | 3.71 | |
| | Amps | 9.8 | 10.0 | 10.3 | 10.7 | 10.5 | 10.8 | 11.1 | 11.5 | 11.4 | 11.7 | 12.1 | 12.5 | 12.2 | 12.5 | 12.9 | 13.3 | 12.9 | 13.3 | 13.7 | 14.2 | 13.7 | 14.0 | 14.5 | 15.0 | |
| Hi PR | 220 | 237 | 250 | 260 | 247 | 265 | 280 | 292 | 280 | 302 | 319 | 332 | 319 | 344 | 363 | 379 | 359 | 387 | 408 | 426 | 397 | 427 | 451 | 471 | | |
| Lo PR | 109 | 115 | 126 | 134 | 115 | 122 | 133 | 142 | 119 | 127 | 138 | 147 | 125 | 133 | 145 | 155 | 131 | 140 | 152 | 162 | 136 | 144 | 158 | 168 | | |
| MBh | 36.4 | 37.1 | 39.7 | 42.4 | 35.5 | 36.3 | 38.8 | 41.4 | 34.7 | 35.4 | 37.8 | 40.5 | 33.8 | 34.6 | 36.9 | 39.5 | 32.1 | 32.8 | 35.1 | 37.5 | 29.8 | 30.4 | 32.5 | 34.7 | | |
| S/T | 0.89 | 0.83 | 0.68 | 0.51 | 0.92 | 0.86 | 0.70 | 0.53 | 0.94 | 0.89 | 0.72 | 0.54 | 0.97 | 0.91 | 0.74 | 0.56 | 1.01 | 0.95 | 0.77 | 0.58 | 1.02 | 0.96 | 0.78 | 0.58 | | |
| ΔT | 24 | 23 | 20 | 16 | 25 | 24 | 20 | 16 | 25 | 24 | 20 | 16 | 25 | 24 | 21 | 16 | 24 | 23 | 20 | 16 | 23 | 22 | 19 | 15 | | |
| kW | 2.61 | 2.67 | 2.74 | 2.82 | 2.80 | 2.85 | 2.94 | 3.03 | 2.96 | 3.02 | 3.11 | 3.21 | 3.10 | 3.17 | 3.26 | 3.36 | 3.22 | 3.29 | 3.39 | 3.50 | 3.33 | 3.40 | 3.50 | 3.62 | | |
| Amps | 9.5 | 9.7 | 10.0 | 10.4 | 10.3 | 10.5 | 10.8 | 11.2 | 11.1 | 11.4 | 11.7 | 12.2 | 11.9 | 12.1 | 12.5 | 13.0 | 12.6 | 12.9 | 13.3 | 13.8 | 13.3 | 13.6 | 14.1 | 14.6 | | |
| Hi PR | 213 | 229 | 242 | 253 | 239 | 257 | 272 | 284 | 272 | 293 | 309 | 322 | 310 | 333 | 352 | 367 | 349 | 375 | 396 | 413 | 385 | 414 | 438 | 456 | | |
| Lo PR | 105 | 112 | 122 | 130 | 111 | 118 | 129 | 138 | 116 | 123 | 134 | 143 | 121 | 129 | 141 | 150 | 127 | 135 | 148 | 157 | 132 | 140 | 153 | 163 | | |
| 85 | 1575 | MBh | 41.3 | 42.1 | 44.1 | 47.0 | 40.3 | 41.1 | 43.0 | 45.9 | 39.4 | 40.1 | 42.0 | 44.8 | 38.4 | 39.1 | 41.0 | 43.7 | 36.5 | 37.2 | 38.9 | 41.5 | 33.8 | 34.4 | 36.1 | 38.5 |
| | | S/T | 1.00 | 0.98 | 0.88 | 0.72 | 1.00 | 1.00 | 0.91 | 0.74 | 1.00 | 1.00 | 0.94 | 0.76 | 1.00 | 1.00 | 0.97 | 0.78 | 1.00 | 1.00 | 0.96 | 0.78 | 1.00 | 1.00 | 0.97 | 0.82 |
| | ΔT | 24 | 24 | 23 | 20 | 24 | 24 | 23 | 20 | 23 | 23 | 23 | 20 | 22 | 23 | 23 | 20 | 21 | 22 | 23 | 20 | 20 | 20 | 21 | 18 | |
| | kW | 2.71 | 2.77 | 2.85 | 2.93 | 2.91 | 2.96 | 3.05 | 3.15 | 3.08 | 3.14 | 3.23 | 3.33 | 3.23 | 3.29 | 3.39 | 3.50 | 3.35 | 3.42 | 3.53 | 3.64 | 3.46 | 3.54 | 3.65 | 3.76 | |
| | Amps | 9.9 | 10.2 | 10.5 | 10.9 | 10.7 | 11.0 | 11.3 | 11.7 | 11.6 | 11.9 | 12.3 | 12.7 | 12.4 | 12.7 | 13.1 | 13.6 | 13.2 | 13.5 | 13.9 | 14.5 | 13.9 | 14.3 | 14.8 | 15.3 | |
| | Hi PR | 224 | 241 | 255 | 266 | 252 | 271 | 286 | 298 | 286 | 308 | 325 | 339 | 326 | 351 | 370 | 386 | 367 | 395 | 417 | 434 | 405 | 436 | 460 | 480 | |
| | Lo PR | 111 | 118 | 129 | 137 | 117 | 124 | 136 | 145 | 122 | 129 | 141 | 150 | 128 | 136 | 148 | 158 | 134 | 142 | 155 | 165 | 138 | 147 | 161 | 171 | |
| | MBh | 40.1 | 40.9 | 42.8 | 45.6 | 39.1 | 39.9 | 41.8 | 44.6 | 38.2 | 39.0 | 40.8 | 43.5 | 37.3 | 38.0 | 39.8 | 42.5 | 35.4 | 36.1 | 37.8 | 40.3 | 32.8 | 33.4 | 35.0 | 37.4 | |
| | S/T | 0.97 | 0.93 | 0.84 | 0.68 | 1.00 | 0.97 | 0.87 | 0.71 | 1.00 | 0.99 | 0.89 | 0.72 | 1.00 | 1.00 | 0.92 | 0.75 | 1.00 | 1.00 | 0.96 | 0.78 | 1.00 | 1.00 | 0.97 | 0.78 | |
| | ΔT | 25 | 25 | 24 | 20 | 26 | 25 | 24 | 21 | 25 | 25 | 24 | 21 | 24 | 25 | 24 | 21 | 24 | 24 | 24 | 21 | 22 | 22 | 22 | 19 | |
| | kW | 2.69 | 2.75 | 2.83 | 2.91 | 2.88 | 2.94 | 3.03 | 3.12 | 3.05 | 3.11 | 3.21 | 3.31 | 3.20 | 3.27 | 3.37 | 3.47 | 3.33 | 3.40 | 3.50 | 3.61 | 3.44 | 3.51 | 3.62 | 3.73 | |
| | Amps | 9.9 | 10.1 | 10.4 | 10.8 | 10.6 | 10.9 | 11.2 | 11.6 | 11.5 | 11.8 | 12.2 | 12.6 | 12.3 | 12.6 | 13.0 | 13.5 | 13.1 | 13.4 | 13.8 | 14.3 | 13.8 | 14.2 | 14.6 | 15.2 | |
| Hi PR | 222 | 239 | 252 | 263 | 249 | 268 | 283 | 295 | 283 | 305 | 322 | 336 | 323 | 347 | 367 | 382 | 363 | 391 | 412 | 430 | 401 | 432 | 456 | 475 | | |
| Lo PR | 110 | 117 | 127 | 136 | 116 | 123 | 134 | 143 | 120 | 128 | 140 | 149 | 126 | 134 | 147 | 156 | 132 | 141 | 154 | 164 | 137 | 146 | 159 | 169 | | |
| MBh | 37.0 | 37.7 | 39.5 | 42.1 | 36.1 | 36.8 | 38.6 | 41.2 | 35.3 | 36.0 | 37.7 | 40.2 | 34.4 | 35.1 | 36.7 | 39.2 | 32.7 | 33.3 | 34.9 | 37.2 | 30.3 | 30.9 | 32.3 | 34.5 | | |
| S/T | 0.93 | 0.90 | 0.81 | 0.66 | 0.96 | 0.93 | 0.84 | 0.68 | 0.99 | 0.95 | 0.86 | 0.70 | 1.00 | 0.99 | 0.89 | 0.72 | 1.00 | 1.00 | 0.92 | 0.75 | 1.00 | 1.00 | 0.93 | 0.76 | | |
| ΔT | 26 | 25 | 24 | 21 | 26 | 26 | 24 | 21 | 26 | 26 | 24 | 21 | 26 | 26 | 25 | 21 | 25 | 25 | 24 | 21 | 23 | 23 | 23 | 20 | | |
| kW | 2.63 | 2.68 | 2.76 | 2.84 | 2.82 | 2.87 | 2.96 | 3.05 | 2.98 | 3.04 | 3.13 | 3.23 | 3.13 | 3.19 | 3.29 | 3.39 | 3.25 | 3.32 | 3.42 | 3.53 | 3.36 | 3.43 | 3.53 | 3.64 | | |
| Amps | 9.6 | 9.8 | 10.1 | 10.5 | 10.3 | 10.6 | 10.9 | 11.3 | 11.2 | 11.5 | 11.8 | 12.3 | 12.0 | 12.2 | 12.6 | 13.1 | 12.7 | 13.0 | 13.4 | 13.9 | 13.4 | 13.8 | 14.2 | 14.7 | | |
| Hi PR | 215 | 232 | 245 | 255 | 242 | 260 | 275 | 286 | 275 | 296 | 312 | 326 | 313 | 337 | 356 | 371 | 352 | 379 | 400 | 417 | 389 | 419 | 442 | 461 | | |
| Lo PR | 106 | 113 | 123 | 131 | 112 | 119 | 130 | 139 | 117 | 124 | 136 | 144 | 123 | 130 | 142 | 152 | 128 | 137 | 149 | 159 | 133 | 141 | 154 | 164 | | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects AHRI (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp. + fan)

EXPANDED COOLING DATA — SSZ140481A* / CA*F4860*6A* + TXV / MBR2000** -1

| IDB | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---------|-----------------------------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|-------|------|------|-----|-------|------|------|----|
| | | 65°F | | | | 75°F | | | | 85°F | | | | 95°F | | | | 105°F | | | | 115°F | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 |
| 70 | MBh | 45.1 | 46.7 | 51.2 | - | 44.0 | 45.6 | 50.0 | - | 43.0 | 44.5 | 48.8 | - | 41.9 | 43.5 | 47.6 | - | 39.8 | 41.3 | 45.2 | - | 36.9 | 38.2 | 41.9 | - |
| | S/T | 0.76 | 0.64 | 0.44 | - | 0.79 | 0.66 | 0.46 | - | 0.81 | 0.68 | 0.47 | - | 0.84 | 0.70 | 0.48 | - | 0.87 | 0.73 | 0.50 | - | 0.88 | 0.73 | 0.51 | - |
| | ΔT | 18 | 16 | 12 | - | 18 | 16 | 12 | - | 18 | 16 | 12 | - | 18 | 16 | 12 | - | 18 | 16 | 12 | - | 17 | 15 | 11 | - |
| | kW | 2.98 | 3.04 | 3.13 | - | 3.19 | 3.26 | 3.36 | - | 3.38 | 3.45 | 3.56 | - | 3.55 | 3.62 | 3.73 | - | 3.69 | 3.77 | 3.88 | - | 3.81 | 3.89 | 4.01 | - |
| | Amps | 5.9 | 6.2 | 6.5 | - | 6.8 | 7.0 | 7.4 | - | 7.7 | 8.0 | 8.5 | - | 8.6 | 8.9 | 9.4 | - | 9.5 | 9.8 | 10.3 | - | 10.3 | 10.7 | 11.2 | - |
| | Hi PR | 217 | 233 | 247 | - | 243 | 262 | 277 | - | 277 | 298 | 315 | - | 315 | 339 | 358 | - | 355 | 382 | 403 | - | 392 | 422 | 445 | - |
| | Lo PR | 106 | 113 | 123 | - | 112 | 119 | 130 | - | 116 | 124 | 135 | - | 122 | 130 | 142 | - | 128 | 136 | 149 | - | 132 | 141 | 154 | - |
| | MBh | 43.8 | 45.4 | 49.7 | - | 42.7 | 44.3 | 48.5 | - | 41.7 | 43.2 | 47.4 | - | 40.7 | 42.2 | 46.2 | - | 38.7 | 40.1 | 43.9 | - | 35.8 | 37.1 | 40.7 | - |
| | S/T | 0.73 | 0.61 | 0.42 | - | 0.75 | 0.63 | 0.44 | - | 0.77 | 0.65 | 0.45 | - | 0.80 | 0.67 | 0.46 | - | 0.83 | 0.69 | 0.48 | - | 0.84 | 0.70 | 0.48 | - |
| | ΔT | 19 | 16 | 12 | - | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 19 | 16 | 12 | - | 18 | 15 | 12 | - |
| 1550 | kW | 2.96 | 3.02 | 3.10 | - | 3.17 | 3.23 | 3.33 | - | 3.36 | 3.42 | 3.53 | - | 3.52 | 3.59 | 3.70 | - | 3.66 | 3.74 | 3.85 | - | 3.78 | 3.86 | 3.98 | - |
| | Amps | 5.8 | 6.1 | 6.4 | - | 6.7 | 6.9 | 7.3 | - | 7.6 | 7.9 | 8.4 | - | 8.5 | 8.8 | 9.3 | - | 9.3 | 9.7 | 10.2 | - | 10.2 | 10.5 | 11.0 | - |
| | Hi PR | 215 | 231 | 244 | - | 241 | 259 | 274 | - | 274 | 295 | 311 | - | 312 | 336 | 355 | - | 351 | 378 | 399 | - | 388 | 418 | 441 | - |
| | Lo PR | 105 | 112 | 122 | - | 111 | 118 | 129 | - | 115 | 122 | 134 | - | 121 | 129 | 140 | - | 127 | 135 | 147 | - | 131 | 139 | 152 | - |
| | MBh | 40.4 | 41.9 | 45.9 | - | 39.5 | 40.9 | 44.8 | - | 38.5 | 39.9 | 43.7 | - | 37.6 | 38.9 | 42.7 | - | 35.7 | 37.0 | 40.5 | - | 33.1 | 34.3 | 37.5 | - |
| | S/T | 0.70 | 0.59 | 0.41 | - | 0.73 | 0.61 | 0.42 | - | 0.75 | 0.62 | 0.43 | - | 0.77 | 0.64 | 0.45 | - | 0.80 | 0.67 | 0.46 | - | 0.81 | 0.67 | 0.47 | - |
| | ΔT | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 20 | 17 | 13 | - | 19 | 17 | 13 | - | 18 | 16 | 12 | - |
| | kW | 2.89 | 2.95 | 3.04 | - | 3.10 | 3.16 | 3.25 | - | 3.28 | 3.34 | 3.45 | - | 3.44 | 3.51 | 3.62 | - | 3.57 | 3.65 | 3.76 | - | 3.69 | 3.77 | 3.89 | - |
| | Amps | 5.5 | 5.8 | 6.1 | - | 6.3 | 6.6 | 7.0 | - | 7.3 | 7.6 | 8.0 | - | 8.1 | 8.4 | 8.9 | - | 8.9 | 9.3 | 9.7 | - | 9.7 | 10.1 | 10.6 | - |
| | Hi PR | 208 | 224 | 237 | - | 234 | 252 | 266 | - | 266 | 286 | 302 | - | 303 | 326 | 344 | - | 341 | 367 | 387 | - | 376 | 405 | 428 | - |
| Lo PR | 102 | 108 | 118 | - | 107 | 114 | 125 | - | 112 | 119 | 130 | - | 117 | 125 | 136 | - | 123 | 131 | 143 | - | 127 | 135 | 148 | - | |

| | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|-------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 1744 | MBh | 45.8 | 47.2 | 51.1 | 54.8 | 44.8 | 46.1 | 49.9 | 53.6 | 43.7 | 45.0 | 48.7 | 52.3 | 42.6 | 43.9 | 47.5 | 51.0 | 40.5 | 41.7 | 45.1 | 48.5 | 37.5 | 38.6 | 41.8 | 44.9 |
| | S/T | 0.87 | 0.78 | 0.59 | 0.38 | 0.90 | 0.80 | 0.61 | 0.39 | 0.92 | 0.82 | 0.62 | 0.40 | 0.95 | 0.85 | 0.64 | 0.41 | 0.99 | 0.88 | 0.67 | 0.43 | 1.00 | 0.89 | 0.67 | 0.43 |
| | ΔT | 21 | 19 | 16 | 11 | 21 | 20 | 16 | 11 | 21 | 20 | 16 | 11 | 21 | 20 | 16 | 11 | 21 | 19 | 16 | 11 | 20 | 18 | 15 | 10 |
| | kW | 3.00 | 3.06 | 3.15 | 3.25 | 3.22 | 3.28 | 3.38 | 3.49 | 3.41 | 3.48 | 3.58 | 3.70 | 3.58 | 3.65 | 3.76 | 3.88 | 3.72 | 3.80 | 3.92 | 4.04 | 3.84 | 3.92 | 4.05 | 4.18 |
| | Amps | 6.0 | 6.3 | 6.6 | 7.0 | 6.9 | 7.1 | 7.5 | 8.0 | 7.9 | 8.2 | 8.6 | 9.1 | 8.7 | 9.1 | 9.5 | 10.0 | 9.6 | 9.9 | 10.4 | 11.0 | 10.4 | 10.8 | 11.3 | 11.9 |
| | Hi PR | 219 | 236 | 249 | 260 | 246 | 265 | 279 | 291 | 280 | 301 | 318 | 331 | 319 | 343 | 362 | 378 | 358 | 386 | 407 | 425 | 396 | 426 | 450 | 469 |
| | Lo PR | 107 | 114 | 124 | 132 | 113 | 120 | 131 | 140 | 117 | 125 | 136 | 145 | 123 | 131 | 143 | 153 | 129 | 138 | 150 | 160 | 134 | 142 | 155 | 165 |
| | MBh | 44.5 | 45.8 | 49.6 | 53.2 | 43.5 | 44.8 | 48.4 | 52.0 | 42.4 | 43.7 | 47.3 | 50.8 | 41.4 | 42.6 | 46.1 | 49.5 | 39.3 | 40.5 | 43.8 | 47.0 | 36.4 | 37.5 | 40.6 | 43.6 |
| | S/T | 0.83 | 0.74 | 0.56 | 0.36 | 0.86 | 0.77 | 0.58 | 0.37 | 0.88 | 0.79 | 0.59 | 0.38 | 0.91 | 0.81 | 0.61 | 0.40 | 0.94 | 0.84 | 0.64 | 0.41 | 0.95 | 0.85 | 0.64 | 0.41 |
| | ΔT | 22 | 20 | 16 | 11 | 22 | 20 | 17 | 12 | 22 | 20 | 17 | 12 | 22 | 21 | 17 | 12 | 22 | 20 | 17 | 11 | 21 | 19 | 15 | 11 |
| 1550 | kW | 2.98 | 3.04 | 3.13 | 3.22 | 3.19 | 3.26 | 3.36 | 3.46 | 3.38 | 3.45 | 3.56 | 3.67 | 3.55 | 3.62 | 3.73 | 3.85 | 3.69 | 3.77 | 3.88 | 4.01 | 3.81 | 3.89 | 4.01 | 4.14 |
| | Amps | 5.9 | 6.2 | 6.5 | 6.9 | 6.8 | 7.0 | 7.4 | 7.9 | 7.7 | 8.1 | 8.5 | 9.0 | 8.6 | 8.9 | 9.4 | 9.9 | 9.5 | 9.8 | 10.3 | 10.9 | 10.3 | 10.7 | 11.2 | 11.8 |
| | Hi PR | 217 | 233 | 247 | 257 | 243 | 262 | 277 | 289 | 277 | 298 | 315 | 328 | 315 | 339 | 358 | 374 | 355 | 382 | 403 | 421 | 392 | 422 | 445 | 465 |
| | Lo PR | 106 | 113 | 123 | 131 | 112 | 119 | 130 | 138 | 116 | 124 | 135 | 144 | 122 | 130 | 142 | 151 | 128 | 136 | 149 | 158 | 132 | 141 | 154 | 164 |
| | MBh | 41.1 | 42.3 | 45.8 | 49.1 | 40.1 | 41.3 | 44.7 | 48.0 | 39.2 | 40.3 | 43.7 | 46.8 | 38.2 | 39.3 | 42.6 | 45.7 | 36.3 | 37.4 | 40.5 | 43.4 | 33.6 | 34.6 | 37.5 | 40.2 |
| | S/T | 0.80 | 0.71 | 0.54 | 0.35 | 0.83 | 0.74 | 0.56 | 0.36 | 0.85 | 0.76 | 0.57 | 0.37 | 0.87 | 0.78 | 0.59 | 0.38 | 0.91 | 0.81 | 0.61 | 0.40 | 0.92 | 0.82 | 0.62 | 0.40 |
| | ΔT | 22 | 20 | 17 | 12 | 22 | 21 | 17 | 12 | 22 | 21 | 17 | 12 | 23 | 21 | 17 | 12 | 23 | 21 | 17 | 12 | 21 | 19 | 16 | 11 |
| | kW | 2.91 | 2.97 | 3.06 | 3.15 | 3.12 | 3.18 | 3.28 | 3.38 | 3.30 | 3.37 | 3.47 | 3.58 | 3.46 | 3.54 | 3.65 | 3.76 | 3.60 | 3.68 | 3.79 | 3.91 | 3.72 | 3.80 | 3.92 | 4.04 |
| | Amps | 5.6 | 5.9 | 6.2 | 6.6 | 6.4 | 6.7 | 7.1 | 7.5 | 7.4 | 7.7 | 8.1 | 8.6 | 8.2 | 8.6 | 9.0 | 9.5 | 9.1 | 9.4 | 9.9 | 10.4 | 9.9 | 10.2 | 10.7 | 11.3 |
| | Hi PR | 210 | 226 | 239 | 249 | 236 | 254 | 268 | 280 | 269 | 289 | 305 | 318 | 306 | 329 | 348 | 363 | 344 | 370 | 391 | 408 | 380 | 409 | 432 | 451 |
| Lo PR | 103 | 109 | 119 | 127 | 109 | 115 | 126 | 134 | 113 | 120 | 131 | 140 | 118 | 126 | 138 | 147 | 124 | 132 | 144 | 154 | 128 | 137 | 149 | 159 | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects ACCA (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp. +fan)

EXPANDED COOLING DATA — SSZ140481A* / CA*F4860*6A* + TXV / MBR2000** -1 (CONT.)

| IDB | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | ENTERING INDOOR WET BULB TEMPERATURE | | | | | | | | | | | | |
|-------|---------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|--------------------------------------|------|------|------|-------|------|------|------|-------|------|------|------|------|
| | | 65°F | | | | 75°F | | | | 85°F | | | | 95°F | | | | 105°F | | | | 115°F | | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | |
| 80 | 1744 | MBh | 46.7 | 47.7 | 50.9 | 54.4 | 45.6 | 46.6 | 49.7 | 53.2 | 44.5 | 45.5 | 48.6 | 51.9 | 43.4 | 44.3 | 47.4 | 50.6 | 41.2 | 42.1 | 45.0 | 48.1 | 38.2 | 39.0 | 41.7 | 44.6 |
| | | S/T | 0.95 | 0.89 | 0.73 | 0.54 | 1.00 | 0.92 | 0.75 | 0.56 | 1.00 | 0.95 | 0.77 | 0.58 | 1.00 | 1.00 | 0.80 | 0.60 | 1.00 | 1.00 | 0.83 | 0.62 | 1.00 | 1.00 | 0.83 | 0.62 |
| | | ΔT | 23 | 22 | 19 | 16 | 24 | 23 | 20 | 16 | 23 | 23 | 20 | 16 | 23 | 23 | 20 | 16 | 22 | 22 | 18 | 15 | 20 | 21 | 18 | 15 |
| | kW | 3.03 | 3.08 | 3.18 | 3.27 | 3.24 | 3.31 | 3.41 | 3.51 | 3.43 | 3.51 | 3.61 | 3.73 | 3.60 | 3.68 | 3.79 | 3.91 | 3.75 | 3.83 | 3.95 | 4.07 | 3.87 | 3.95 | 4.08 | 4.21 | |
| | Amps | 6.1 | 6.4 | 6.7 | 7.1 | 7.0 | 7.3 | 7.6 | 8.1 | 8.0 | 8.3 | 8.7 | 9.2 | 8.8 | 9.2 | 9.6 | 10.2 | 9.7 | 10.1 | 10.6 | 11.2 | 10.6 | 11.0 | 11.5 | 12.1 | |
| | Hi PR | 221 | 238 | 252 | 262 | 248 | 267 | 282 | 294 | 282 | 304 | 321 | 335 | 322 | 346 | 366 | 381 | 362 | 390 | 411 | 429 | 400 | 430 | 454 | 474 | |
| | Lo PR | 108 | 115 | 125 | 134 | 114 | 121 | 133 | 141 | 119 | 126 | 138 | 147 | 125 | 133 | 145 | 154 | 131 | 139 | 152 | 162 | 135 | 144 | 157 | 167 | |
| | MBh | 45.3 | 46.3 | 49.5 | 52.9 | 44.2 | 45.2 | 48.3 | 51.6 | 43.2 | 44.1 | 47.2 | 50.4 | 42.1 | 43.1 | 46.0 | 49.2 | 40.0 | 40.9 | 43.7 | 46.7 | 37.1 | 37.9 | 40.5 | 43.3 | |
| | S/T | 0.91 | 0.85 | 0.69 | 0.52 | 0.94 | 0.88 | 0.72 | 0.54 | 0.96 | 0.90 | 0.74 | 0.55 | 0.99 | 0.93 | 0.76 | 0.57 | 1.00 | 0.97 | 0.79 | 0.59 | 1.00 | 0.98 | 0.79 | 0.59 | |
| | ΔT | 24 | 23 | 20 | 16 | 25 | 24 | 21 | 16 | 25 | 24 | 21 | 16 | 25 | 24 | 21 | 17 | 24 | 23 | 20 | 16 | 22 | 22 | 19 | 15 | |
| kW | 3.00 | 3.06 | 3.15 | 3.25 | 3.22 | 3.28 | 3.38 | 3.49 | 3.41 | 3.48 | 3.58 | 3.70 | 3.58 | 3.65 | 3.76 | 3.88 | 3.72 | 3.80 | 3.92 | 4.04 | 3.84 | 3.92 | 4.05 | 4.18 | | |
| Amps | 6.0 | 6.3 | 6.6 | 7.0 | 6.9 | 7.1 | 7.5 | 8.0 | 7.9 | 8.2 | 8.6 | 9.1 | 8.7 | 9.1 | 9.5 | 10.1 | 9.6 | 9.9 | 10.4 | 11.0 | 10.4 | 10.8 | 11.3 | 11.9 | | |
| Hi PR | 219 | 236 | 249 | 260 | 246 | 265 | 279 | 291 | 280 | 301 | 318 | 332 | 319 | 343 | 362 | 378 | 358 | 386 | 407 | 425 | 396 | 426 | 450 | 469 | | |
| Lo PR | 107 | 114 | 124 | 132 | 113 | 120 | 131 | 140 | 117 | 125 | 136 | 145 | 123 | 131 | 143 | 153 | 129 | 138 | 150 | 160 | 134 | 142 | 155 | 165 | | |
| MBh | 41.8 | 42.7 | 45.6 | 48.8 | 40.8 | 41.7 | 44.6 | 47.7 | 39.9 | 40.7 | 43.5 | 46.5 | 38.9 | 39.7 | 42.5 | 45.4 | 36.9 | 37.8 | 40.3 | 43.1 | 34.2 | 35.0 | 37.4 | 39.9 | | |
| S/T | 0.87 | 0.82 | 0.67 | 0.50 | 0.91 | 0.85 | 0.69 | 0.52 | 0.93 | 0.87 | 0.71 | 0.53 | 0.96 | 0.90 | 0.73 | 0.55 | 1.00 | 0.93 | 0.76 | 0.57 | 1.00 | 0.94 | 0.77 | 0.57 | | |
| ΔT | 25 | 24 | 21 | 17 | 25 | 24 | 21 | 17 | 25 | 24 | 21 | 17 | 25 | 24 | 21 | 17 | 25 | 24 | 21 | 17 | 23 | 22 | 19 | 16 | | |
| kW | 2.94 | 2.99 | 3.08 | 3.17 | 3.14 | 3.21 | 3.30 | 3.40 | 3.33 | 3.40 | 3.50 | 3.61 | 3.49 | 3.56 | 3.67 | 3.79 | 3.63 | 3.71 | 3.82 | 3.94 | 3.75 | 3.83 | 3.95 | 4.08 | | |
| Amps | 5.7 | 6.0 | 6.3 | 6.7 | 6.6 | 6.8 | 7.2 | 7.6 | 7.5 | 7.8 | 8.2 | 8.7 | 8.4 | 8.7 | 9.1 | 9.6 | 9.2 | 9.5 | 10.0 | 10.6 | 10.0 | 10.4 | 10.9 | 11.5 | | |
| Hi PR | 213 | 229 | 242 | 252 | 239 | 257 | 271 | 283 | 271 | 292 | 308 | 322 | 309 | 333 | 351 | 366 | 348 | 374 | 395 | 412 | 384 | 413 | 436 | 455 | | |
| Lo PR | 104 | 110 | 121 | 128 | 110 | 117 | 127 | 136 | 114 | 121 | 132 | 141 | 120 | 127 | 139 | 148 | 125 | 133 | 146 | 155 | 130 | 138 | 151 | 160 | | |

| | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|-------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 85 | 1744 | MBh | 47.5 | 48.4 | 50.7 | 54.1 | 46.4 | 47.3 | 49.5 | 52.8 | 45.3 | 46.1 | 48.3 | 51.6 | 44.2 | 45.0 | 47.1 | 50.3 | 42.0 | 42.8 | 44.8 | 47.8 | 38.9 | 39.6 | 41.5 | 44.3 |
| | | S/T | 1.00 | 0.96 | 0.87 | 0.70 | 1.00 | 1.00 | 0.90 | 0.73 | 1.00 | 1.00 | 0.92 | 0.75 | 1.00 | 1.00 | 0.95 | 0.77 | 1.00 | 1.00 | 0.99 | 0.80 | 1.00 | 1.00 | 1.00 | 0.81 |
| | | ΔT | 25 | 25 | 23 | 20 | 24 | 25 | 23 | 20 | 24 | 24 | 24 | 20 | 23 | 24 | 24 | 20 | 22 | 23 | 23 | 20 | 20 | 21 | 22 | 19 |
| | kW | 3.05 | 3.11 | 3.20 | 3.30 | 3.27 | 3.33 | 3.43 | 3.54 | 3.46 | 3.53 | 3.64 | 3.76 | 3.63 | 3.71 | 3.82 | 3.95 | 3.78 | 3.86 | 3.98 | 4.11 | 3.90 | 3.99 | 4.11 | 4.25 | |
| | Amps | 6.2 | 6.5 | 6.8 | 7.2 | 7.1 | 7.4 | 7.8 | 8.2 | 8.1 | 8.4 | 8.8 | 9.4 | 9.0 | 9.3 | 9.8 | 10.3 | 9.9 | 10.2 | 10.7 | 11.3 | 10.7 | 11.1 | 11.6 | 12.3 | |
| | Hi PR | 224 | 241 | 254 | 265 | 251 | 270 | 285 | 297 | 285 | 307 | 324 | 338 | 325 | 350 | 369 | 385 | 366 | 393 | 415 | 433 | 404 | 435 | 459 | 479 | |
| | Lo PR | 109 | 116 | 127 | 135 | 115 | 123 | 134 | 143 | 120 | 127 | 139 | 148 | 126 | 134 | 146 | 156 | 132 | 140 | 153 | 163 | 136 | 145 | 158 | 169 | |
| | MBh | 46.1 | 47.0 | 49.2 | 52.5 | 45.0 | 45.9 | 48.1 | 51.3 | 43.9 | 44.8 | 46.9 | 50.1 | 42.9 | 43.7 | 45.8 | 48.8 | 40.7 | 41.5 | 43.5 | 46.4 | 37.7 | 38.5 | 40.3 | 43.0 | |
| | S/T | 0.95 | 0.92 | 0.83 | 0.67 | 0.99 | 0.95 | 0.86 | 0.70 | 1.00 | 0.97 | 0.88 | 0.71 | 1.00 | 1.00 | 0.91 | 0.74 | 1.00 | 1.00 | 0.94 | 0.76 | 1.00 | 1.00 | 0.95 | 0.77 | |
| | ΔT | 26 | 26 | 24 | 21 | 26 | 26 | 24 | 21 | 26 | 26 | 24 | 21 | 25 | 26 | 25 | 21 | 24 | 25 | 24 | 21 | 22 | 23 | 23 | 20 | |
| kW | 3.03 | 3.08 | 3.18 | 3.27 | 3.24 | 3.31 | 3.41 | 3.51 | 3.43 | 3.51 | 3.61 | 3.73 | 3.60 | 3.68 | 3.79 | 3.91 | 3.75 | 3.83 | 3.95 | 4.07 | 3.87 | 3.95 | 4.08 | 4.21 | | |
| Amps | 6.1 | 6.4 | 6.7 | 7.1 | 7.0 | 7.3 | 7.6 | 8.1 | 8.0 | 8.3 | 8.7 | 9.2 | 8.8 | 9.2 | 9.6 | 10.2 | 9.7 | 10.1 | 10.6 | 11.2 | 10.6 | 11.0 | 11.5 | 12.1 | | |
| Hi PR | 221 | 238 | 252 | 262 | 248 | 267 | 282 | 294 | 282 | 304 | 321 | 335 | 322 | 346 | 366 | 381 | 362 | 390 | 411 | 429 | 400 | 430 | 454 | 474 | | |
| Lo PR | 108 | 115 | 125 | 134 | 114 | 121 | 133 | 141 | 119 | 126 | 138 | 147 | 125 | 133 | 145 | 154 | 131 | 139 | 152 | 162 | 135 | 144 | 157 | 167 | | |
| MBh | 42.5 | 43.4 | 45.4 | 48.5 | 41.5 | 42.4 | 44.4 | 47.3 | 40.6 | 41.3 | 43.3 | 46.2 | 39.6 | 40.3 | 42.2 | 45.1 | 37.6 | 38.3 | 40.1 | 42.8 | 34.8 | 35.5 | 37.2 | 39.7 | | |
| S/T | 0.92 | 0.88 | 0.80 | 0.65 | 0.95 | 0.92 | 0.83 | 0.67 | 0.97 | 0.94 | 0.85 | 0.69 | 1.00 | 0.97 | 0.88 | 0.71 | 1.00 | 1.00 | 0.91 | 0.74 | 1.00 | 1.00 | 0.92 | 0.74 | | |
| ΔT | 26 | 26 | 25 | 21 | 27 | 26 | 25 | 22 | 27 | 26 | 25 | 22 | 27 | 27 | 25 | 22 | 25 | 26 | 25 | 21 | 24 | 24 | 23 | 20 | | |
| kW | 2.96 | 3.02 | 3.10 | 3.20 | 3.17 | 3.23 | 3.33 | 3.43 | 3.35 | 3.42 | 3.53 | 3.64 | 3.52 | 3.59 | 3.70 | 3.82 | 3.66 | 3.74 | 3.85 | 3.97 | 3.78 | 3.86 | 3.98 | 4.11 | | |
| Amps | 5.8 | 6.1 | 6.4 | 6.8 | 6.7 | 6.9 | 7.3 | 7.8 | 7.6 | 7.9 | 8.3 | 8.8 | 8.5 | 8.8 | 9.2 | 9.8 | 9.3 | 9.7 | 10.1 | 10.7 | 10.2 | 10.5 | 11.0 | 11.6 | | |
| Hi PR | 215 | 231 | 244 | 254 | 241 | 259 | 274 | 286 | 274 | 295 | 311 | 325 | 312 | 336 | 355 | 370 | 351 | 378 | 399 | 416 | 388 | 417 | 441 | 460 | | |
| Lo PR | 105 | 111 | 122 | 130 | 111 | 118 | 129 | 137 | 115 | 122 | 134 | 142 | 121 | 129 | 140 | 150 | 127 | 135 | 147 | 157 | 131 | 139 | 152 | 162 | | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects AHRI (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

EXPANDED COOLING DATA — SSZ140601A* / CA*F4860*6A* + TXV / MBE2000** -1

| IDB | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | ENTERING INDOOR WET BULB TEMPERATURE | | | | | | | | | | | |
|-------|---------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|--------------------------------------|------|------|------|-------|------|------|------|-------|------|------|----|
| | | 65°F | | | | 75°F | | | | 85°F | | | | 95°F | | | | 105°F | | | | 115°F | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 |
| 70 | MBh | 55.4 | 57.4 | 62.9 | - | 54.1 | 56.1 | 61.4 | - | 52.8 | 54.7 | 59.9 | - | 51.5 | 53.4 | 58.5 | - | 48.9 | 50.7 | 55.6 | - | 45.3 | 47.0 | 51.5 | - |
| | S/T | 0.74 | 0.62 | 0.43 | - | 0.77 | 0.64 | 0.45 | - | 0.79 | 0.66 | 0.46 | - | 0.81 | 0.68 | 0.47 | - | 0.85 | 0.71 | 0.49 | - | 0.85 | 0.71 | 0.49 | - |
| | ΔT | 18 | 16 | 12 | - | 18 | 16 | 12 | - | 18 | 16 | 12 | - | 19 | 16 | 12 | - | 18 | 16 | 12 | - | 17 | 15 | 11 | - |
| | kW | 3.63 | 3.70 | 3.82 | - | 3.91 | 3.99 | 4.12 | - | 4.16 | 4.25 | 4.39 | - | 4.38 | 4.48 | 4.63 | - | 4.57 | 4.67 | 4.83 | - | 4.73 | 4.83 | 5.00 | - |
| | Amps | 7.6 | 7.9 | 8.4 | - | 8.7 | 9.1 | 9.6 | - | 10.0 | 10.4 | 10.9 | - | 11.1 | 11.5 | 12.1 | - | 12.2 | 12.7 | 13.3 | - | 13.3 | 13.8 | 14.5 | - |
| | Hi PR | 219 | 236 | 249 | - | 246 | 264 | 279 | - | 279 | 301 | 318 | - | 318 | 343 | 362 | - | 358 | 385 | 407 | - | 396 | 426 | 450 | - |
| | Lo PR | 103 | 110 | 120 | - | 109 | 116 | 126 | - | 113 | 120 | 131 | - | 119 | 126 | 138 | - | 125 | 132 | 145 | - | 129 | 137 | 150 | - |
| | MBh | 53.8 | 55.7 | 61.0 | - | 52.5 | 54.4 | 59.6 | - | 51.3 | 53.1 | 58.2 | - | 50.0 | 51.8 | 56.8 | - | 47.5 | 49.2 | 53.9 | - | 44.0 | 45.6 | 50.0 | - |
| | S/T | 0.71 | 0.59 | 0.41 | - | 0.73 | 0.61 | 0.42 | - | 0.75 | 0.63 | 0.44 | - | 0.78 | 0.65 | 0.45 | - | 0.81 | 0.67 | 0.47 | - | 0.81 | 0.68 | 0.47 | - |
| | ΔT | 19 | 16 | 12 | - | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 19 | 16 | 13 | - | 18 | 15 | 12 | - |
| kW | 3.60 | 3.67 | 3.79 | - | 3.88 | 3.96 | 4.09 | - | 4.12 | 4.22 | 4.35 | - | 4.34 | 4.44 | 4.59 | - | 4.53 | 4.63 | 4.78 | - | 4.69 | 4.79 | 4.96 | - | |
| Amps | 7.4 | 7.8 | 8.2 | - | 8.6 | 8.9 | 9.4 | - | 9.8 | 10.2 | 10.8 | - | 11.0 | 11.4 | 12.0 | - | 12.1 | 12.5 | 13.1 | - | 13.2 | 13.6 | 14.3 | - | |
| Hi PR | 217 | 233 | 246 | - | 243 | 262 | 276 | - | 277 | 298 | 314 | - | 315 | 339 | 358 | - | 355 | 382 | 403 | - | 392 | 422 | 445 | - | |
| Lo PR | 102 | 108 | 118 | - | 108 | 115 | 125 | - | 112 | 119 | 130 | - | 118 | 125 | 137 | - | 123 | 131 | 143 | - | 128 | 136 | 148 | - | |
| MBh | 49.6 | 51.4 | 56.3 | - | 48.5 | 50.2 | 55.0 | - | 47.3 | 49.0 | 53.7 | - | 46.2 | 47.8 | 52.4 | - | 43.8 | 45.4 | 49.8 | - | 40.6 | 42.1 | 46.1 | - | |
| S/T | 0.68 | 0.57 | 0.40 | - | 0.71 | 0.59 | 0.41 | - | 0.73 | 0.61 | 0.42 | - | 0.75 | 0.63 | 0.43 | - | 0.78 | 0.65 | 0.45 | - | 0.78 | 0.65 | 0.45 | - | |
| ΔT | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 20 | 17 | 13 | - | 19 | 17 | 13 | - | 18 | 16 | 12 | - | |
| kW | 3.51 | 3.58 | 3.70 | - | 3.78 | 3.86 | 3.99 | - | 4.02 | 4.11 | 4.24 | - | 4.23 | 4.33 | 4.47 | - | 4.41 | 4.51 | 4.66 | - | 4.57 | 4.67 | 4.83 | - | |
| Amps | 7.1 | 7.4 | 7.8 | - | 8.2 | 8.5 | 9.0 | - | 9.4 | 9.8 | 10.3 | - | 10.5 | 10.9 | 11.5 | - | 11.6 | 12.0 | 12.6 | - | 12.6 | 13.1 | 13.7 | - | |
| Hi PR | 210 | 226 | 239 | - | 236 | 254 | 268 | - | 268 | 289 | 305 | - | 306 | 329 | 347 | - | 344 | 370 | 391 | - | 380 | 409 | 432 | - | |
| Lo PR | 99 | 105 | 115 | - | 105 | 111 | 121 | - | 109 | 116 | 126 | - | 114 | 121 | 133 | - | 120 | 127 | 139 | - | 124 | 132 | 144 | - | |

| | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|-------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 75 | MBh | 56.3 | 58.0 | 62.7 | 67.3 | 55.0 | 56.6 | 61.3 | 65.8 | 53.7 | 55.3 | 59.8 | 64.2 | 52.4 | 53.9 | 58.4 | 62.6 | 49.8 | 51.2 | 55.5 | 59.5 | 46.1 | 47.5 | 51.4 | 55.1 |
| | S/T | 0.84 | 0.75 | 0.57 | 0.37 | 0.87 | 0.78 | 0.59 | 0.38 | 0.90 | 0.80 | 0.61 | 0.39 | 0.93 | 0.83 | 0.63 | 0.40 | 0.96 | 0.86 | 0.65 | 0.42 | 0.97 | 0.87 | 0.66 | 0.42 |
| | ΔT | 21 | 19 | 16 | 11 | 21 | 20 | 16 | 11 | 21 | 20 | 16 | 11 | 21 | 20 | 16 | 11 | 21 | 19 | 16 | 11 | 20 | 18 | 15 | 10 |
| | kW | 3.66 | 3.73 | 3.85 | 3.98 | 3.94 | 4.03 | 4.16 | 4.30 | 4.19 | 4.29 | 4.43 | 4.58 | 4.42 | 4.52 | 4.67 | 4.82 | 4.61 | 4.71 | 4.87 | 5.03 | 4.77 | 4.88 | 5.04 | 5.22 |
| | Amps | 7.7 | 8.0 | 8.5 | 9.1 | 8.8 | 9.2 | 9.7 | 10.3 | 10.1 | 10.5 | 11.1 | 11.8 | 11.3 | 11.7 | 12.3 | 13.0 | 12.4 | 12.9 | 13.5 | 14.3 | 13.5 | 14.0 | 14.7 | 15.5 |
| | Hi PR | 221 | 238 | 251 | 262 | 248 | 267 | 282 | 294 | 282 | 304 | 321 | 335 | 322 | 346 | 365 | 381 | 362 | 389 | 411 | 429 | 400 | 430 | 454 | 474 |
| | Lo PR | 104 | 111 | 121 | 129 | 110 | 117 | 128 | 136 | 114 | 122 | 133 | 141 | 120 | 128 | 139 | 148 | 126 | 134 | 146 | 156 | 130 | 138 | 151 | 161 |
| | MBh | 54.7 | 56.3 | 60.9 | 65.4 | 53.4 | 55.0 | 59.5 | 63.9 | 52.1 | 53.7 | 58.1 | 62.3 | 50.9 | 52.4 | 56.7 | 60.8 | 48.3 | 49.7 | 53.8 | 57.8 | 44.7 | 46.1 | 49.9 | 53.5 |
| | S/T | 0.80 | 0.72 | 0.54 | 0.35 | 0.83 | 0.75 | 0.56 | 0.36 | 0.86 | 0.77 | 0.58 | 0.37 | 0.88 | 0.79 | 0.60 | 0.38 | 0.92 | 0.82 | 0.62 | 0.40 | 0.92 | 0.83 | 0.63 | 0.40 |
| | ΔT | 22 | 20 | 16 | 11 | 22 | 20 | 17 | 12 | 22 | 20 | 17 | 12 | 22 | 21 | 17 | 12 | 22 | 20 | 17 | 11 | 21 | 19 | 16 | 11 |
| kW | 3.63 | 3.70 | 3.82 | 3.95 | 3.91 | 3.99 | 4.12 | 4.26 | 4.16 | 4.25 | 4.39 | 4.54 | 4.38 | 4.48 | 4.63 | 4.78 | 4.57 | 4.67 | 4.83 | 4.99 | 4.73 | 4.84 | 5.00 | 5.17 | |
| Amps | 7.6 | 7.9 | 8.4 | 8.9 | 8.7 | 9.1 | 9.6 | 10.2 | 10.0 | 10.4 | 10.9 | 11.6 | 11.1 | 11.5 | 12.1 | 12.8 | 12.2 | 12.7 | 13.3 | 14.1 | 13.3 | 13.8 | 14.5 | 15.3 | |
| Hi PR | 219 | 236 | 249 | 260 | 246 | 265 | 279 | 291 | 280 | 301 | 318 | 331 | 318 | 343 | 362 | 377 | 358 | 385 | 407 | 425 | 396 | 426 | 450 | 469 | |
| Lo PR | 103 | 110 | 120 | 127 | 109 | 116 | 126 | 135 | 113 | 120 | 131 | 140 | 119 | 126 | 138 | 147 | 125 | 132 | 145 | 154 | 129 | 137 | 150 | 159 | |
| MBh | 50.5 | 51.9 | 56.2 | 60.3 | 49.3 | 50.7 | 54.9 | 58.9 | 48.1 | 49.5 | 53.6 | 57.5 | 46.9 | 48.3 | 52.3 | 56.1 | 44.6 | 45.9 | 49.7 | 53.3 | 41.3 | 42.5 | 46.0 | 49.4 | |
| S/T | 0.78 | 0.69 | 0.53 | 0.34 | 0.80 | 0.72 | 0.54 | 0.35 | 0.82 | 0.74 | 0.56 | 0.36 | 0.85 | 0.76 | 0.58 | 0.37 | 0.88 | 0.79 | 0.60 | 0.38 | 0.89 | 0.80 | 0.60 | 0.39 | |
| ΔT | 22 | 20 | 17 | 12 | 23 | 21 | 17 | 12 | 23 | 21 | 17 | 12 | 23 | 21 | 17 | 12 | 23 | 21 | 17 | 12 | 21 | 19 | 16 | 11 | |
| kW | 3.54 | 3.61 | 3.73 | 3.85 | 3.81 | 3.90 | 4.02 | 4.15 | 4.06 | 4.14 | 4.28 | 4.42 | 4.27 | 4.36 | 4.51 | 4.66 | 4.45 | 4.55 | 4.70 | 4.86 | 4.61 | 4.71 | 4.87 | 5.04 | |
| Amps | 7.2 | 7.5 | 8.0 | 8.5 | 8.3 | 8.6 | 9.1 | 9.7 | 9.5 | 9.9 | 10.5 | 11.1 | 10.6 | 11.0 | 11.6 | 12.3 | 11.7 | 12.2 | 12.8 | 13.5 | 12.8 | 13.3 | 13.9 | 14.7 | |
| Hi PR | 212 | 229 | 241 | 252 | 238 | 257 | 271 | 283 | 271 | 292 | 308 | 321 | 309 | 332 | 351 | 366 | 347 | 374 | 395 | 412 | 384 | 413 | 436 | 455 | |
| Lo PR | 100 | 106 | 116 | 124 | 106 | 112 | 123 | 131 | 110 | 117 | 127 | 136 | 115 | 123 | 134 | 143 | 121 | 129 | 140 | 149 | 125 | 133 | 145 | 155 | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects ACCA (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp. + fan)

EXPANDED COOLING DATA — SSSZ140601A* / CA*F4860*6A* + TXV / MBE2000** -1 (CONT.)

| IDB | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | ENTERING INDOOR WET BULB TEMPERATURE | | | | | | | | | | | |
|-------|---------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|--------------------------------------|------|------|------|-------|------|------|------|-------|------|------|------|
| | | 65°F | | | | 75°F | | | | 85°F | | | | 95°F | | | | 105°F | | | | 115°F | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 |
| 2081 | MBh | 57.3 | 58.6 | 62.6 | 66.9 | 56.0 | 57.2 | 61.1 | 65.3 | 54.6 | 55.8 | 59.6 | 63.8 | 53.3 | 54.5 | 58.2 | 62.2 | 50.6 | 51.7 | 55.3 | 59.1 | 46.9 | 47.9 | 51.2 | 54.7 |
| | S/T | 0.93 | 0.87 | 0.71 | 0.53 | 0.96 | 0.90 | 0.73 | 0.55 | 1.00 | 0.92 | 0.75 | 0.56 | 1.00 | 0.95 | 0.78 | 0.58 | 1.00 | 1.00 | 0.80 | 0.60 | 1.00 | 1.00 | 0.81 | 0.61 |
| | ΔT | 23 | 22 | 20 | 16 | 24 | 23 | 20 | 16 | 24 | 23 | 20 | 16 | 24 | 23 | 20 | 16 | 22 | 21 | 18 | 15 | 21 | 21 | 18 | 15 |
| | kW | 3.69 | 3.76 | 3.89 | 4.01 | 3.97 | 4.06 | 4.19 | 4.33 | 4.23 | 4.32 | 4.47 | 4.62 | 4.45 | 4.55 | 4.71 | 4.87 | 4.64 | 4.75 | 4.91 | 5.08 | 4.81 | 4.92 | 5.09 | 5.26 |
| | Amps | 7.8 | 8.2 | 8.6 | 9.2 | 9.0 | 9.3 | 9.9 | 10.5 | 10.3 | 10.7 | 11.3 | 11.9 | 11.4 | 11.9 | 12.5 | 13.2 | 12.6 | 13.0 | 13.7 | 14.5 | 13.7 | 14.2 | 14.9 | 15.7 |
| | Hi PR | 223 | 240 | 254 | 265 | 251 | 270 | 285 | 297 | 285 | 307 | 324 | 338 | 325 | 350 | 369 | 385 | 365 | 393 | 415 | 433 | 404 | 434 | 459 | 479 |
| | Lo PR | 105 | 112 | 122 | 130 | 111 | 118 | 129 | 137 | 115 | 123 | 134 | 143 | 121 | 129 | 141 | 150 | 127 | 135 | 148 | 157 | 131 | 140 | 153 | 163 |
| | MBh | 55.6 | 56.9 | 60.7 | 64.9 | 54.3 | 55.5 | 59.3 | 63.4 | 53.0 | 54.2 | 57.9 | 61.9 | 51.8 | 52.9 | 56.5 | 60.4 | 49.2 | 50.2 | 53.7 | 57.4 | 45.5 | 46.5 | 49.7 | 53.2 |
| | S/T | 0.88 | 0.83 | 0.67 | 0.50 | 0.91 | 0.86 | 0.70 | 0.52 | 0.94 | 0.88 | 0.72 | 0.54 | 0.97 | 0.91 | 0.74 | 0.55 | 1.00 | 0.94 | 0.77 | 0.57 | 1.00 | 0.95 | 0.77 | 0.58 |
| | ΔT | 24 | 23 | 20 | 16 | 25 | 24 | 21 | 16 | 25 | 24 | 21 | 16 | 25 | 24 | 21 | 17 | 24 | 24 | 20 | 16 | 23 | 22 | 19 | 15 |
| 1850 | kW | 3.66 | 3.73 | 3.85 | 3.98 | 3.94 | 4.03 | 4.16 | 4.30 | 4.19 | 4.29 | 4.43 | 4.58 | 4.42 | 4.52 | 4.67 | 4.82 | 4.61 | 4.71 | 4.87 | 5.03 | 4.77 | 4.88 | 5.04 | 5.22 |
| | Amps | 7.7 | 8.0 | 8.5 | 9.1 | 8.8 | 9.2 | 9.7 | 10.3 | 10.1 | 10.5 | 11.1 | 11.8 | 11.3 | 11.7 | 12.3 | 13.0 | 12.4 | 12.9 | 13.5 | 14.3 | 13.5 | 14.0 | 14.7 | 15.5 |
| | Hi PR | 221 | 238 | 251 | 262 | 248 | 267 | 282 | 294 | 282 | 304 | 321 | 335 | 322 | 346 | 365 | 381 | 362 | 389 | 411 | 429 | 400 | 430 | 454 | 474 |
| | Lo PR | 104 | 111 | 121 | 129 | 110 | 117 | 128 | 136 | 114 | 122 | 133 | 141 | 120 | 128 | 139 | 148 | 126 | 134 | 146 | 156 | 130 | 138 | 151 | 161 |
| | MBh | 51.4 | 52.5 | 56.1 | 59.9 | 50.2 | 51.3 | 54.8 | 58.5 | 49.0 | 50.0 | 53.5 | 57.1 | 47.8 | 48.8 | 52.1 | 55.7 | 45.4 | 46.4 | 49.5 | 53.0 | 42.0 | 43.0 | 45.9 | 49.1 |
| | S/T | 0.85 | 0.80 | 0.65 | 0.49 | 0.88 | 0.83 | 0.67 | 0.50 | 0.90 | 0.85 | 0.69 | 0.52 | 0.93 | 0.88 | 0.71 | 0.53 | 0.97 | 0.91 | 0.74 | 0.55 | 0.98 | 0.92 | 0.75 | 0.56 |
| | ΔT | 25 | 24 | 21 | 17 | 25 | 24 | 21 | 17 | 25 | 24 | 21 | 17 | 25 | 24 | 21 | 17 | 25 | 24 | 21 | 17 | 23 | 22 | 19 | 16 |
| | kW | 3.57 | 3.64 | 3.76 | 3.88 | 3.84 | 3.93 | 4.06 | 4.19 | 4.09 | 4.18 | 4.32 | 4.46 | 4.31 | 4.40 | 4.55 | 4.70 | 4.49 | 4.59 | 4.74 | 4.90 | 4.65 | 4.75 | 4.91 | 5.08 |
| | Amps | 7.3 | 7.6 | 8.1 | 8.6 | 8.4 | 8.8 | 9.3 | 9.9 | 9.7 | 10.1 | 10.6 | 11.3 | 10.8 | 11.2 | 11.8 | 12.5 | 11.9 | 12.3 | 13.0 | 13.7 | 13.0 | 13.4 | 14.1 | 14.9 |
| | Hi PR | 215 | 231 | 244 | 254 | 241 | 259 | 274 | 285 | 274 | 295 | 311 | 325 | 312 | 336 | 354 | 370 | 351 | 378 | 399 | 416 | 388 | 417 | 441 | 460 |
| Lo PR | 101 | 107 | 117 | 125 | 107 | 113 | 124 | 132 | 111 | 118 | 129 | 137 | 116 | 124 | 135 | 144 | 122 | 130 | 142 | 151 | 126 | 134 | 147 | 156 | |

| | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|-------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 2081 | MBh | 58.3 | 59.4 | 62.2 | 66.4 | 56.9 | 58.1 | 60.8 | 64.9 | 55.6 | 56.7 | 59.4 | 63.3 | 54.2 | 55.3 | 57.9 | 61.8 | 51.5 | 52.5 | 55.0 | 58.7 | 47.7 | 48.7 | 51.0 | 54.4 |
| | S/T | 0.97 | 0.94 | 0.85 | 0.69 | 1.00 | 0.97 | 0.88 | 0.71 | 1.00 | 1.00 | 0.90 | 0.73 | 1.00 | 1.00 | 0.93 | 0.75 | 1.00 | 1.00 | 0.96 | 0.78 | 1.00 | 1.00 | 0.97 | 0.79 |
| | ΔT | 25 | 25 | 23 | 20 | 25 | 25 | 24 | 20 | 25 | 25 | 24 | 20 | 24 | 24 | 24 | 20 | 23 | 23 | 23 | 20 | 21 | 21 | 22 | 19 |
| | kW | 3.72 | 3.80 | 3.92 | 4.05 | 4.01 | 4.09 | 4.23 | 4.37 | 4.26 | 4.36 | 4.50 | 4.66 | 4.49 | 4.59 | 4.75 | 4.91 | 4.68 | 4.79 | 4.95 | 5.12 | 4.85 | 4.96 | 5.13 | 5.31 |
| | Amps | 8.0 | 8.3 | 8.8 | 9.3 | 9.1 | 9.5 | 10.0 | 10.6 | 10.4 | 10.9 | 11.4 | 12.1 | 11.6 | 12.0 | 12.7 | 13.4 | 12.8 | 13.2 | 13.9 | 14.7 | 13.9 | 14.4 | 15.1 | 15.9 |
| | Hi PR | 226 | 243 | 256 | 268 | 253 | 273 | 288 | 300 | 288 | 310 | 327 | 341 | 328 | 353 | 373 | 389 | 369 | 397 | 419 | 437 | 408 | 439 | 463 | 483 |
| | Lo PR | 106 | 113 | 123 | 131 | 112 | 119 | 130 | 139 | 117 | 124 | 135 | 144 | 122 | 130 | 142 | 151 | 128 | 137 | 149 | 159 | 133 | 141 | 154 | 164 |
| | MBh | 56.6 | 57.7 | 60.4 | 64.5 | 55.3 | 56.4 | 59.0 | 63.0 | 54.0 | 55.0 | 57.6 | 61.5 | 52.7 | 53.7 | 56.2 | 60.0 | 50.0 | 51.0 | 53.4 | 57.0 | 46.3 | 47.2 | 49.5 | 52.8 |
| | S/T | 0.93 | 0.89 | 0.81 | 0.65 | 0.96 | 0.93 | 0.84 | 0.68 | 0.98 | 0.95 | 0.86 | 0.69 | 1.00 | 0.98 | 0.88 | 0.72 | 1.00 | 1.00 | 0.92 | 0.74 | 1.00 | 1.00 | 0.93 | 0.75 |
| | ΔT | 26 | 26 | 24 | 21 | 26 | 26 | 25 | 21 | 26 | 26 | 25 | 21 | 26 | 26 | 25 | 21 | 25 | 25 | 24 | 21 | 23 | 23 | 23 | 20 |
| 1850 | kW | 3.69 | 3.76 | 3.89 | 4.01 | 3.97 | 4.06 | 4.19 | 4.33 | 4.23 | 4.32 | 4.47 | 4.62 | 4.45 | 4.55 | 4.71 | 4.87 | 4.64 | 4.75 | 4.91 | 5.08 | 4.81 | 4.92 | 5.09 | 5.26 |
| | Amps | 7.8 | 8.2 | 8.6 | 9.2 | 9.0 | 9.3 | 9.9 | 10.5 | 10.3 | 10.7 | 11.3 | 11.9 | 11.4 | 11.9 | 12.5 | 13.2 | 12.6 | 13.0 | 13.7 | 14.5 | 13.7 | 14.2 | 14.9 | 15.7 |
| | Hi PR | 223 | 240 | 254 | 265 | 251 | 270 | 285 | 297 | 285 | 307 | 324 | 338 | 325 | 350 | 369 | 385 | 365 | 393 | 415 | 433 | 404 | 434 | 459 | 479 |
| | Lo PR | 105 | 112 | 122 | 130 | 111 | 118 | 129 | 137 | 115 | 123 | 134 | 143 | 121 | 129 | 141 | 150 | 127 | 135 | 148 | 157 | 131 | 140 | 153 | 163 |
| | MBh | 52.2 | 53.3 | 55.8 | 59.5 | 51.0 | 52.0 | 54.5 | 58.1 | 49.8 | 50.8 | 53.2 | 56.7 | 48.6 | 49.5 | 51.9 | 55.4 | 46.2 | 47.1 | 49.3 | 52.6 | 42.8 | 43.6 | 45.7 | 48.7 |
| | S/T | 0.89 | 0.86 | 0.78 | 0.63 | 0.92 | 0.89 | 0.81 | 0.65 | 0.95 | 0.92 | 0.83 | 0.67 | 0.98 | 0.94 | 0.85 | 0.69 | 1.00 | 0.98 | 0.88 | 0.72 | 1.00 | 0.99 | 0.89 | 0.72 |
| | ΔT | 26 | 26 | 25 | 21 | 27 | 26 | 25 | 22 | 27 | 26 | 25 | 22 | 27 | 27 | 25 | 22 | 26 | 26 | 25 | 21 | 24 | 24 | 23 | 20 |
| | kW | 3.60 | 3.67 | 3.79 | 3.91 | 3.88 | 3.96 | 4.09 | 4.22 | 4.12 | 4.21 | 4.35 | 4.50 | 4.34 | 4.44 | 4.59 | 4.74 | 4.53 | 4.63 | 4.78 | 4.95 | 4.69 | 4.79 | 4.95 | 5.12 |
| | Amps | 7.4 | 7.8 | 8.2 | 8.8 | 8.6 | 8.9 | 9.4 | 10.0 | 9.8 | 10.2 | 10.8 | 11.4 | 10.9 | 11.4 | 12.0 | 12.6 | 12.1 | 12.5 | 13.1 | 13.9 | 13.1 | 13.6 | 14.3 | 15.1 |
| | Hi PR | 217 | 233 | 246 | 257 | 243 | 262 | 276 | 288 | 277 | 298 | 314 | 328 | 315 | 339 | 358 | 373 | 354 | 381 | 403 | 420 | 392 | 421 | 445 | 464 |
| Lo PR | 102 | 108 | 118 | 126 | 108 | 115 | 125 | 133 | 112 | 119 | 130 | 138 | 118 | 125 | 137 | 145 | 123 | 131 | 143 | 152 | 127 | 136 | 148 | 158 | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects AHRI (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp. + fan)

EXPANDED HEATING DATA

SSZ140181A* / CA*F3131*6A*+TXV / MBR800-1**

| | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | | | | | | |
|-------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| | 65 | 60 | 55 | 50 | 47 | 45 | 40 | 35 | 30 | 25 | 20 | 17 | 15 | 10 | 5 | 0 | -5 | -10 |
| MBh | 22.6 | 21.4 | 20.2 | 18.8 | 18.0 | 17.4 | 16.2 | 14.9 | 12.8 | 11.8 | 10.9 | 10.3 | 9.9 | 8.9 | 7.9 | 6.9 | 5.9 | 4.8 |
| ΔT | 34.9 | 33.1 | 31.1 | 29.1 | 27.8 | 26.9 | 25.0 | 23.1 | 19.7 | 18.2 | 16.8 | 15.8 | 15.3 | 13.7 | 12.1 | 10.6 | 9.0 | 7.4 |
| kW | 1.56 | 1.53 | 1.50 | 1.47 | 1.45 | 1.44 | 1.41 | 1.38 | 1.39 | 1.36 | 1.32 | 1.31 | 1.29 | 1.26 | 1.23 | 1.20 | 1.17 | 1.14 |
| Amps | 7.0 | 6.5 | 6.1 | 5.7 | 5.5 | 5.4 | 5.1 | 4.9 | 4.7 | 4.5 | 4.2 | 4.1 | 4.1 | 3.9 | 3.6 | 3.4 | 3.2 | 2.9 |
| COP | 4.23 | 4.09 | 3.93 | 3.75 | 3.62 | 3.54 | 3.36 | 3.16 | 2.70 | 2.55 | 2.40 | 2.30 | 2.24 | 2.06 | 1.87 | 1.67 | 1.47 | 1.23 |
| EER | 14.5 | 14.0 | 13.4 | 12.8 | 12.4 | 12.1 | 11.5 | 10.8 | 9.2 | 8.7 | 8.2 | 7.9 | 7.6 | 7.0 | 6.4 | 5.7 | 5.0 | 4.2 |
| Hi PR | 385 | 369 | 355 | 339 | 331 | 325 | 312 | 300 | 287 | 274 | 263 | 257 | 252 | 243 | 234 | 224 | 216 | 208 |
| Lo PR | 149 | 138 | 129 | 118 | 112 | 108 | 99 | 88 | 80 | 71 | 62 | 58 | 56 | 47 | 41 | 34 | 30 | 24 |

SSZ140241A* / CA*F3636*6A*+TXV / MBR800-1**

| | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | | | | | | |
|-------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| | 65 | 60 | 55 | 50 | 47 | 45 | 40 | 35 | 30 | 25 | 20 | 17 | 15 | 10 | 5 | 0 | -5 | -10 |
| MBh | 30.2 | 28.6 | 26.9 | 25.1 | 24.0 | 23.3 | 21.6 | 19.9 | 17.9 | 16.6 | 15.2 | 14.4 | 13.9 | 12.4 | 11.0 | 9.6 | 8.2 | 6.7 |
| ΔT | 32.9 | 31.1 | 29.3 | 27.4 | 26.1 | 25.3 | 23.5 | 21.7 | 19.5 | 18.0 | 16.6 | 15.7 | 15.1 | 13.5 | 12.0 | 10.5 | 8.9 | 7.3 |
| kW | 2.08 | 2.04 | 2.00 | 1.96 | 1.94 | 1.92 | 1.89 | 1.85 | 1.87 | 1.82 | 1.78 | 1.76 | 1.74 | 1.70 | 1.66 | 1.62 | 1.58 | 1.54 |
| Amps | 8.1 | 7.9 | 7.7 | 7.5 | 7.4 | 7.3 | 7.2 | 7.1 | 7.0 | 6.9 | 6.8 | 6.7 | 6.7 | 6.6 | 6.5 | 6.3 | 6.2 | 6.1 |
| COP | 4.24 | 4.09 | 3.93 | 3.74 | 3.62 | 3.54 | 3.35 | 3.16 | 2.81 | 2.65 | 2.50 | 2.39 | 2.33 | 2.14 | 1.94 | 1.73 | 1.52 | 1.28 |
| EER | 14.5 | 14.0 | 13.4 | 12.8 | 12.4 | 12.1 | 11.4 | 10.8 | 9.6 | 9.1 | 8.5 | 8.2 | 7.9 | 7.3 | 6.6 | 5.9 | 5.2 | 4.4 |
| Hi PR | 373 | 358 | 344 | 329 | 321 | 315 | 303 | 290 | 278 | 266 | 255 | 249 | 245 | 235 | 226 | 217 | 209 | 202 |
| Lo PR | 143 | 133 | 124 | 114 | 108 | 104 | 95 | 85 | 77 | 68 | 60 | 56 | 54 | 46 | 39 | 33 | 29 | 23 |

SSZ140301A* / CA*F3642*6A*+TXV / MBR1600-1**

| | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | | | | | | |
|-------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| | 65 | 60 | 55 | 50 | 47 | 45 | 40 | 35 | 30 | 25 | 20 | 17 | 15 | 10 | 5 | 0 | -5 | -10 |
| MBh | 36.5 | 34.5 | 32.5 | 30.4 | 29.0 | 28.1 | 26.1 | 24.1 | 22.6 | 20.9 | 19.2 | 18.2 | 17.5 | 15.7 | 13.9 | 12.1 | 10.3 | 8.5 |
| ΔT | 32.1 | 30.4 | 28.6 | 26.8 | 25.6 | 24.8 | 23.0 | 21.2 | 19.9 | 18.4 | 17.0 | 16.0 | 15.4 | 13.8 | 12.3 | 10.7 | 9.1 | 7.5 |
| kW | 2.40 | 2.36 | 2.32 | 2.27 | 2.25 | 2.23 | 2.19 | 2.14 | 2.20 | 2.15 | 2.11 | 2.08 | 2.06 | 2.01 | 1.97 | 1.92 | 1.87 | 1.83 |
| Amps | 11.8 | 10.6 | 9.6 | 8.7 | 8.2 | 8.0 | 7.2 | 6.6 | 6.1 | 5.6 | 5.1 | 4.9 | 4.8 | 4.3 | 3.6 | 3.1 | 2.5 | 1.8 |
| COP | 4.44 | 4.28 | 4.10 | 3.91 | 3.78 | 3.69 | 3.50 | 3.29 | 3.01 | 2.84 | 2.67 | 2.55 | 2.48 | 2.28 | 2.07 | 1.85 | 1.62 | 1.36 |
| EER | 15.2 | 14.6 | 14.0 | 13.4 | 12.9 | 12.6 | 11.9 | 11.2 | 10.3 | 9.7 | 9.1 | 8.7 | 8.5 | 7.8 | 7.1 | 6.3 | 5.5 | 4.6 |
| Hi PR | 360 | 346 | 332 | 318 | 310 | 304 | 292 | 281 | 269 | 257 | 247 | 241 | 236 | 227 | 219 | 210 | 202 | 195 |
| Lo PR | 137 | 127 | 119 | 110 | 104 | 100 | 92 | 82 | 74 | 66 | 58 | 54 | 52 | 44 | 38 | 32 | 28 | 22 |

SSZ140361A* / CA*F4860C6A*+TXV / MBR1600-1**

| | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | | | | | | |
|-------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| | 65 | 60 | 55 | 50 | 47 | 45 | 40 | 35 | 30 | 25 | 20 | 17 | 15 | 10 | 5 | 0 | -5 | -10 |
| MBh | 43.5 | 41.2 | 38.8 | 36.2 | 34.6 | 33.5 | 31.1 | 28.7 | 28.8 | 26.6 | 24.5 | 23.1 | 22.3 | 20.0 | 17.7 | 15.5 | 13.2 | 10.8 |
| ΔT | 38.4 | 36.3 | 34.2 | 31.9 | 30.5 | 29.6 | 27.5 | 25.3 | 25.4 | 23.5 | 21.6 | 20.4 | 19.6 | 17.6 | 15.6 | 13.6 | 11.6 | 9.5 |
| kW | 3.05 | 2.99 | 2.94 | 2.88 | 2.84 | 2.82 | 2.76 | 2.71 | 2.78 | 2.72 | 2.66 | 2.62 | 2.60 | 2.53 | 2.47 | 2.41 | 2.35 | 2.29 |
| Amps | 13.8 | 12.8 | 12.0 | 11.3 | 10.9 | 10.7 | 10.1 | 9.6 | 9.2 | 8.9 | 8.4 | 8.3 | 8.2 | 7.8 | 7.3 | 6.9 | 6.4 | 5.8 |
| COP | 4.17 | 4.02 | 3.86 | 3.68 | 3.56 | 3.48 | 3.30 | 3.11 | 3.03 | 2.86 | 2.70 | 2.58 | 2.51 | 2.31 | 2.10 | 1.87 | 1.64 | 1.38 |
| EER | 14.3 | 13.8 | 13.2 | 12.6 | 12.2 | 11.9 | 11.3 | 10.6 | 10.4 | 9.8 | 9.2 | 8.8 | 8.6 | 7.9 | 7.2 | 6.4 | 5.6 | 4.7 |
| Hi PR | 384 | 368 | 353 | 338 | 330 | 324 | 311 | 299 | 286 | 273 | 262 | 256 | 251 | 242 | 233 | 223 | 215 | 208 |
| Lo PR | 144 | 134 | 125 | 115 | 109 | 105 | 96 | 86 | 77 | 69 | 61 | 56 | 54 | 46 | 40 | 33 | 29 | 23 |

High pressure is measured at the suction service valve (the larger valve).

Low pressure is measured at the gauge port connection.

Calculations are based on nominal CFM and 70°F indoor dry bulb.

Amps = Outdoor unit amps (comp.+fan)

kW = Total system power

EXPANDED HEATING DATA (CONT.)

SSZ140361B*/AR*F374316B*

| | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | | | | | | |
|-------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| | 65 | 60 | 55 | 50 | 47 | 45 | 40 | 35 | 30 | 25 | 20 | 17 | 15 | 10 | 5 | 0 | -5 | -10 |
| MBh | 41.5 | 39.3 | 37.0 | 34.6 | 33.0 | 32.0 | 29.7 | 27.4 | 24.9 | 23.0 | 21.2 | 20.0 | 19.3 | 17.3 | 15.3 | 13.4 | 11.4 | 9.3 |
| T/R | 30.7 | 29.1 | 27.4 | 25.6 | 24.4 | 23.7 | 22.0 | 20.3 | 18.5 | 17.0 | 15.7 | 14.8 | 14.3 | 12.8 | 11.3 | 9.9 | 8.4 | 6.9 |
| kW | 2.96 | 2.90 | 2.85 | 2.79 | 2.76 | 2.74 | 2.69 | 2.64 | 2.93 | 2.86 | 2.80 | 2.76 | 2.74 | 2.68 | 2.61 | 2.55 | 2.49 | 2.43 |
| Amps | 11.9 | 11.1 | 10.4 | 9.8 | 9.5 | 9.3 | 8.9 | 8.4 | 8.1 | 7.8 | 7.5 | 7.3 | 7.2 | 6.9 | 6.5 | 6.1 | 5.7 | 5.2 |
| COP | 4.11 | 3.96 | 3.80 | 3.62 | 3.49 | 3.41 | 3.23 | 3.04 | 2.49 | 2.35 | 2.21 | 2.12 | 2.06 | 1.89 | 1.72 | 1.53 | 1.34 | 1.13 |
| EER | 14.0 | 13.5 | 13.0 | 12.4 | 11.9 | 11.7 | 11.0 | 10.4 | 8.5 | 8.0 | 7.6 | 7.2 | 7.0 | 6.5 | 5.9 | 5.2 | 4.6 | 3.8 |
| HI PR | 346 | 332 | 319 | 305 | 298 | 292 | 281 | 270 | 258 | 247 | 237 | 231 | 227 | 218 | 210 | 201 | 194 | 187 |
| LO PR | 141 | 131 | 123 | 113 | 107 | 102 | 94 | 84 | 76 | 68 | 59 | 55 | 53 | 45 | 39 | 33 | 29 | 22 |

SSZ140421A* / CA*F4860*6A*+TXV / MBR2000**-1

| | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | | | | | | |
|-------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| | 65 | 60 | 55 | 50 | 47 | 45 | 40 | 35 | 30 | 25 | 20 | 17 | 15 | 10 | 5 | 0 | -5 | -10 |
| MBh | 51.5 | 48.8 | 45.9 | 42.9 | 41.0 | 39.7 | 36.9 | 34.0 | 34.3 | 31.6 | 29.1 | 27.5 | 26.5 | 23.8 | 21.1 | 18.4 | 15.7 | 12.8 |
| ΔT | 34.1 | 32.3 | 30.4 | 28.4 | 27.1 | 26.3 | 24.4 | 22.5 | 22.7 | 20.9 | 19.3 | 18.2 | 17.5 | 15.7 | 13.9 | 12.1 | 10.4 | 8.5 |
| kW | 3.40 | 3.33 | 3.27 | 3.21 | 3.17 | 3.14 | 3.08 | 3.02 | 3.07 | 3.00 | 2.94 | 2.90 | 2.87 | 2.81 | 2.74 | 2.68 | 2.61 | 2.54 |
| Amps | 15.2 | 14.1 | 13.2 | 12.4 | 12.0 | 11.8 | 11.1 | 10.6 | 10.1 | 9.7 | 9.2 | 9.0 | 8.9 | 8.5 | 7.9 | 7.5 | 6.9 | 6.3 |
| COP | 4.44 | 4.28 | 4.11 | 3.92 | 3.79 | 3.70 | 3.50 | 3.30 | 3.26 | 3.08 | 2.90 | 2.78 | 2.70 | 2.48 | 2.25 | 2.01 | 1.76 | 1.48 |
| EER | 15.2 | 14.6 | 14.0 | 13.4 | 12.9 | 12.6 | 12.0 | 11.3 | 11.2 | 10.5 | 9.9 | 9.5 | 9.2 | 8.5 | 7.7 | 6.9 | 6.0 | 5.1 |
| Hi PR | 370 | 354 | 341 | 326 | 318 | 312 | 300 | 288 | 276 | 263 | 253 | 247 | 242 | 233 | 224 | 215 | 207 | 200 |
| Lo PR | 142 | 132 | 123 | 113 | 107 | 103 | 95 | 84 | 76 | 68 | 60 | 56 | 53 | 45 | 39 | 33 | 29 | 23 |

SSZ140481A* / CA*F4860*6A*+TXV / MBR2000**-1

| | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | | | | | | |
|-------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| | 65 | 60 | 55 | 50 | 47 | 45 | 40 | 35 | 30 | 25 | 20 | 17 | 15 | 10 | 5 | 0 | -5 | -10 |
| MBh | 57.8 | 54.7 | 51.5 | 48.2 | 46.0 | 44.6 | 41.4 | 38.2 | 36.6 | 33.8 | 31.1 | 29.4 | 28.3 | 25.4 | 22.5 | 19.6 | 16.8 | 13.7 |
| ΔT | 34.5 | 32.7 | 30.8 | 28.8 | 27.5 | 26.6 | 24.7 | 22.8 | 21.9 | 20.2 | 18.6 | 17.6 | 16.9 | 15.2 | 13.4 | 11.7 | 10.0 | 8.2 |
| kW | 3.98 | 3.90 | 3.83 | 3.75 | 3.71 | 3.68 | 3.60 | 3.53 | 3.65 | 3.57 | 3.49 | 3.44 | 3.41 | 3.32 | 3.24 | 3.16 | 3.08 | 3.00 |
| Amps | 19.4 | 17.6 | 16.1 | 14.8 | 14.1 | 13.7 | 12.7 | 11.7 | 11.0 | 10.3 | 9.5 | 9.2 | 9.0 | 8.3 | 7.4 | 6.6 | 5.7 | 4.6 |
| COP | 4.25 | 4.10 | 3.94 | 3.76 | 3.63 | 3.55 | 3.36 | 3.17 | 2.94 | 2.77 | 2.61 | 2.50 | 2.43 | 2.24 | 2.03 | 1.82 | 1.59 | 1.34 |
| EER | 14.5 | 14.0 | 13.5 | 12.8 | 12.4 | 12.1 | 11.5 | 10.8 | 10.0 | 9.5 | 8.9 | 8.5 | 8.3 | 7.6 | 6.9 | 6.2 | 5.4 | 4.6 |
| Hi PR | 408 | 391 | 376 | 359 | 351 | 344 | 331 | 318 | 304 | 291 | 279 | 272 | 267 | 257 | 247 | 237 | 229 | 221 |
| Lo PR | 136 | 126 | 118 | 109 | 103 | 99 | 91 | 81 | 73 | 65 | 57 | 53 | 51 | 43 | 37 | 32 | 28 | 22 |

SSZ140601A* / CA*F4860*6A*+TXV / MBE2000**-1

| | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | | | | | | |
|-------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| | 65 | 60 | 55 | 50 | 47 | 45 | 40 | 35 | 30 | 25 | 20 | 17 | 15 | 10 | 5 | 0 | -5 | -10 |
| MBh | 57.8 | 57.8 | 57.8 | 57.8 | 57.0 | 55.2 | 51.3 | 47.3 | 47.9 | 44.2 | 40.7 | 38.4 | 37.0 | 33.2 | 29.4 | 25.7 | 21.9 | 17.9 |
| ΔT | 35.9 | 33.9 | 32.0 | 29.9 | 28.5 | 27.6 | 25.7 | 23.7 | 24.0 | 22.1 | 20.4 | 19.2 | 18.5 | 16.6 | 14.7 | 12.8 | 11.0 | 9.0 |
| kW | 4.8 | 4.7 | 4.6 | 4.5 | 4.48 | 4.4 | 4.3 | 4.2 | 4.4 | 4.3 | 4.2 | 4.2 | 4.1 | 4.0 | 3.9 | 3.8 | 3.7 | 3.6 |
| Amps | 24.7 | 22.3 | 20.4 | 18.8 | 17.9 | 17.4 | 16.0 | 14.8 | 13.9 | 12.9 | 12.0 | 11.5 | 11.3 | 10.4 | 9.2 | 8.2 | 7.1 | 5.7 |
| COP | 4.3 | 4.2 | 4.0 | 3.8 | 3.7 | 3.6 | 3.5 | 3.3 | 3.2 | 3.0 | 2.8 | 2.7 | 2.6 | 2.4 | 2.2 | 2.0 | 1.7 | 1.5 |
| EER | 14.8 | 14.3 | 13.8 | 13.1 | 12.7 | 12.4 | 11.8 | 11.1 | 10.8 | 10.2 | 9.7 | 9.3 | 9.0 | 8.3 | 7.5 | 6.8 | 5.9 | 5.0 |
| Hi PR | 404 | 387 | 372 | 356 | 347 | 341 | 327 | 314 | 301 | 288 | 276 | 269 | 265 | 255 | 245 | 235 | 226 | 218 |
| Lo PR | 136 | 126 | 119 | 109 | 103 | 99 | 91 | 81 | 73 | 65 | 57 | 53 | 51 | 43 | 37 | 32 | 28 | 22 |

High pressure is measured at the suction service valve (the larger valve).

Low pressure is measured at the gauge port connection.

Calculations are based on nominal CFM and 70°F indoor dry bulb.

Amps = Outdoor unit amps (comp.+fan)

kW = Total system power

AHRI PERFORMANCE RATINGS

| OUTDOOR UNIT | INDOOR UNITS | | COOLING CAPACITY (BTU/H) | | | | TVA RATINGS ³ | | HEATING CAPACITY | | | AHRI # |
|------------------|----------------------|-----------------|--------------------------|--------|-------------------|------------------|--------------------------|--------|------------------|-------------------|---------|---------|
| | COILS & AIR HANDLERS | FURNACE/BLOWER | TOTAL | SENS. | SEER ¹ | EER ² | TOTAL | SENS. | HIGH | HSPF ⁴ | LOW | |
| SSZ14 0181A* | AEPF183016C*+TXV | | 19,000 | 13,900 | 15.0 | 13.0 | 17,600 | 13,700 | 18,000 | 8.5 | 10,400 | 1492621 |
| | AR*F193116B*+TXV | | 19,000 | 13,900 | 14.5 | 12.5 | 17,600 | 13,700 | 18,000 | 8.5 | 10,200 | 1492622 |
| | ASPF183016B*+TXV | | 19,000 | 13,900 | 15.0 | 13.0 | 17,600 | 13,700 | 18,000 | 8.6 | 10,400 | 1492623 |
| | AT*F193116A*+TXV | | 19,000 | 13,900 | 14.5 | 12.5 | 17,600 | 13,700 | 18,000 | 8.5 | 10,200 | 1483553 |
| | AWUF31XX16A* | | 19,000 | 13,800 | 14.5 | 12.5 | 17,600 | 13,700 | 18,000 | 8.3 | 10,000 | 3853246 |
| | AWUF31XX16A*+TXV | | 18,000 | 13,100 | 15.0 | 12.7 | 16,700 | 13,000 | 18,000 | 8.3 | 10,000 | 3853245 |
| | CA*F3131*6B*+EEP+TXV | | 19,000 | 13,900 | 14.0 | 12.0 | 17,600 | 13,700 | 18,000 | 8.3 | 10,400 | 1346741 |
| | CA*F3131*6B*+TXV | MBE1200** -1 | 18,000 | 13,100 | 15.0 | 12.5 | 16,700 | 13,000 | 18,000 | 8.1 | 10,200 | 1346742 |
| | CA*F3131*6B*+TXV | MBR0800** -1 | 18,000 | 13,100 | 14.0 | 12.0 | 16,700 | 13,000 | 18,000 | 8.1 | 10,200 | 1346743 |
| | CA*F3131*6B*+TXV | G*E80704B** | 18,000 | 13,100 | 15.0 | 12.5 | 16,700 | 13,000 | 18,000 | 8.1 | 10,200 | 1346744 |
| | CA*F3131*6B*+TXV | G*V950453B** | 18,000 | 13,100 | 15.0 | 12.5 | 16,700 | 13,000 | 18,000 | 8.1 | 10,200 | 1346746 |
| | CA*F3131*6B*+TXV | G*VC950453BXA* | 18,000 | 13,100 | 15.0 | 12.5 | 16,700 | 13,000 | 18,000 | 8.1 | 10,200 | 3599151 |
| | CA*F3131*6B*+TXV | G*E80703B** | 18,000 | 13,100 | 15.0 | 12.5 | 16,700 | 13,000 | 18,000 | 8.1 | 10,200 | 3603256 |
| | CA*F3131*6C*+EEP+TXV | | 19,000 | 13,900 | 14.0 | 12.0 | 17,600 | 13,700 | 18,000 | 8.3 | 10,400 | 1401051 |
| | CA*F3131*6C*+TXV | MBE1200** -1 | 18,000 | 13,100 | 15.0 | 12.5 | 16,700 | 13,000 | 18,000 | 8.1 | 10,200 | 1386244 |
| | CA*F3131*6C*+TXV | MBR0800** -1 | 18,000 | 13,100 | 14.0 | 12.0 | 16,700 | 13,000 | 18,000 | 8.1 | 10,200 | 1386246 |
| | CA*F3131*6C*+TXV | MBVC1200** -1A* | 18,000 | 13,100 | 15.0 | 12.5 | 16,700 | 13,000 | 18,000 | 8.1 | 10,200 | 3609926 |
| | CA*F3131*6C*+TXV | G*E80704B** | 18,000 | 13,100 | 15.0 | 12.5 | 16,700 | 13,000 | 18,000 | 8.1 | 10,200 | 1401056 |
| | CA*F3131*6C*+TXV | G*V950453B** | 18,000 | 13,100 | 15.0 | 12.5 | 16,700 | 13,000 | 18,000 | 8.1 | 10,200 | 1401058 |
| | CA*F3131*6C*+TXV | G*VC950453BXA* | 18,000 | 13,100 | 15.0 | 12.5 | 16,700 | 13,000 | 18,000 | 8.1 | 10,200 | 3599152 |
| | CA*F3131*6C*+TXV | G*E80703B** | 18,000 | 13,100 | 15.0 | 12.5 | 16,700 | 13,000 | 18,000 | 8.1 | 10,200 | 3603264 |
| | CHPF2430B6B*+TXV | G*V950453B** | 18,000 | 13,100 | 15.0 | 12.5 | 16,700 | 13,000 | 18,000 | 8.1 | 10,200 | 1330424 |
| | CHPF2430B6B*+TXV | G*E80704B** | 18,000 | 13,100 | 15.0 | 12.5 | 16,700 | 13,000 | 18,000 | 8.1 | 10,200 | 1347586 |
| | CHPF2430B6B*+TXV | G*VC950453BXA* | 18,000 | 13,100 | 15.0 | 12.5 | 16,700 | 13,000 | 18,000 | 8.1 | 10,200 | 3599150 |
| | CHPF2430B6B*+TXV | G*E80703B** | 18,000 | 13,100 | 15.0 | 12.5 | 16,700 | 13,000 | 18,000 | 8.1 | 10,200 | 3603266 |
| | CHPF2430B6C*+TXV | MBR0800** -1 | 18,000 | 13,100 | 14.0 | 12.0 | 16,700 | 13,000 | 18,000 | 8.1 | 10,200 | 3300350 |
| | CHPF2430B6C*+TXV | G*E80704B** | 18,000 | 13,100 | 15.0 | 12.5 | 16,700 | 13,000 | 18,000 | 8.1 | 10,200 | 3300351 |
| | CHPF2430B6C*+TXV | G*V950453B** | 18,000 | 13,100 | 15.0 | 12.5 | 16,700 | 13,000 | 18,000 | 8.1 | 10,200 | 3300353 |
| | CHPF2430B6C*+TXV | G*VC950453BXA* | 18,000 | 13,100 | 15.0 | 12.5 | 16,700 | 13,000 | 18,000 | 8.1 | 10,200 | 3599154 |
| | CHPF2430B6C*+TXV | G*E80703B** | 18,000 | 13,100 | 15.0 | 12.5 | 16,700 | 13,000 | 18,000 | 8.1 | 10,200 | 3603288 |
| | CSCF3036N6B*+TXV | G*E80704B** | 18,000 | 13,100 | 15.0 | 12.5 | 16,700 | 13,000 | 18,000 | 8.1 | 10,200 | 1296657 |
| | CSCF3036N6B*+TXV | G*V950453B** | 18,000 | 13,100 | 15.0 | 12.5 | 16,700 | 13,000 | 18,000 | 8.1 | 10,200 | 1296659 |
| | CSCF3036N6B*+TXV | G*VC950453BXA* | 18,000 | 13,100 | 15.0 | 12.5 | 16,700 | 13,000 | 18,000 | 8.1 | 10,200 | 3599149 |
| | CSCF3036N6B*+TXV | G*E80703B** | 18,000 | 13,100 | 15.0 | 12.5 | 16,700 | 13,000 | 18,000 | 8.1 | 10,200 | 3603253 |
| | CT*F3131*6A*+EEP+TXV | | 19,000 | 13,900 | 14.0 | 12.0 | 17,600 | 13,700 | 18,000 | 8.3 | 10,400 | 1450085 |
| | CT*F3131*6A*+TXV | MBE1200** -1 | 18,000 | 13,100 | 15.0 | 12.5 | 16,700 | 13,000 | 18,000 | 8.1 | 10,200 | 1450086 |
| | CT*F3131*6A*+TXV | MBR0800** -1 | 18,000 | 13,100 | 14.0 | 12.0 | 16,700 | 13,000 | 18,000 | 8.1 | 10,200 | 1450087 |
| | CT*F3131*6A*+TXV | MBVC1200** -1A* | 18,000 | 13,100 | 15.0 | 12.5 | 16,700 | 13,000 | 18,000 | 8.1 | 10,200 | 3610092 |
| | CT*F3131*6A*+TXV | G*E80704B** | 18,000 | 13,100 | 15.0 | 12.5 | 16,700 | 13,000 | 18,000 | 8.1 | 10,200 | 1450088 |
| | CT*F3131*6A*+TXV | G*V950453B** | 18,000 | 13,100 | 15.0 | 12.5 | 16,700 | 13,000 | 18,000 | 8.1 | 10,200 | 1450090 |
| CT*F3131*6A*+TXV | G*VC950453BXA* | 18,000 | 13,100 | 15.0 | 12.5 | 16,700 | 13,000 | 18,000 | 8.1 | 10,200 | 3599153 | |
| CT*F3131*6A*+TXV | G*E80703B** | 18,000 | 13,100 | 15.0 | 12.5 | 16,700 | 13,000 | 18,000 | 8.1 | 10,200 | 3603278 | |
| SSZ14 0241A* | AEPF183016C*+TXV | | 22,800 | 17,100 | 14.5 | 12.2 | 21,100 | 16,900 | 23,600 | 8.3 | 14,500 | 1492624 |
| | AEPF303616C*+TXV | | 24,000 | 18,000 | 15.0 | 13.0 | 22,200 | 17,800 | 24,000 | 8.5 | 14,000 | 1443961 |
| | AEPF313716A*+TXV | | 24,000 | 18,000 | 15.0 | 13.0 | 22,200 | 17,800 | 24,000 | 8.5 | 14,000 | 3305554 |
| | AR*F193116B*+TXV | | 24,000 | 18,000 | 14.0 | 12.0 | 22,200 | 17,800 | 24,000 | 8.2 | 14,000 | 1492625 |
| | ASPF183016B*+TXV | | 23,600 | 17,700 | 15.0 | 12.5 | 21,800 | 17,400 | 22,000 | 8.6 | 13,500 | 3464581 |
| | ASPF303616B*+TXV | | 24,000 | 18,000 | 15.0 | 13.0 | 22,200 | 17,800 | 22,000 | 8.5 | 12,000 | 1443988 |
| | ASPF313716A*+TXV | | 24,000 | 18,000 | 15.0 | 13.0 | 22,200 | 17,800 | 22,000 | 8.5 | 12,000 | 3305555 |
| | AT*F193116A*+TXV | | 24,000 | 18,000 | 14.0 | 12.0 | 22,200 | 17,800 | 24,000 | 8.2 | 14,000 | 1483554 |
| | AWUF31XX16A* | | 24,000 | 18,000 | 14.5 | 12.5 | 22,200 | 17,800 | 23,000 | 8.5 | 13,400 | 3853248 |
| | AWUF31XX16A*+TXV | | 24,000 | 18,000 | 15.0 | 12.7 | 22,200 | 17,800 | 23,000 | 8.5 | 13,400 | 3853247 |
| | AWUF32XX16A* | | 24,000 | 18,000 | 14.5 | 12.5 | 22,200 | 17,800 | 23,000 | 8.5 | 13,400 | 3853250 |
| | AWUF32XX16A*+TXV | | 24,000 | 18,000 | 15.0 | 12.7 | 22,200 | 17,800 | 23,000 | 8.5 | 13,400 | 3853249 |
| | CA*F3636*6B*+EEP+TXV | | 24,000 | 18,000 | 14.0 | 12.0 | 22,200 | 17,800 | 24,400 | 8.2 | 14,000 | 1346747 |
| | CA*F3636*6B*+TXV | MBE1200** -1 | 24,000 | 18,000 | 15.0 | 12.5 | 22,200 | 17,800 | 24,000 | 8.3 | 14,500 | 1346748 |
| | CA*F3636*6B*+TXV | MBE1600** -1 | 24,400 | 18,300 | 15.0 | 13.0 | 22,600 | 18,100 | 22,000 | 8.5 | 12,000 | 1346749 |

See Notes on Page 32.

AHRI PERFORMANCE RATINGS (CONT.)

| OUTDOOR UNIT | INDOOR UNITS | | COOLING CAPACITY (BTU/H) | | | | TVA RATINGS ³ | | HEATING CAPACITY | | | AHRI # |
|----------------------------|----------------------|----------------|--------------------------|--------|-------------------|------------------|--------------------------|--------|------------------|-------------------|---------|---------|
| | COILS & AIR HANDLERS | FURNACE/BLOWER | TOTAL | SENS. | SEER ¹ | EER ² | TOTAL | SENS. | HIGH | HSPF ⁴ | LOW | |
| SSZ14 0241A* (cont.) | CA*F3636*6B*+TXV | MBR0800**1 | 24,000 | 18,000 | 14.0 | 12.0 | 22,200 | 17,800 | 24,000 | 8.2 | 14,500 | 1346750 |
| | CA*F3636*6B*+TXV | G*E80704B** | 23,600 | 17,700 | 15.0 | 12.5 | 21,800 | 17,400 | 23,000 | 8.3 | 14,500 | 1346751 |
| | CA*F3636*6B*+TXV | G*V950453B** | 23,600 | 17,700 | 14.5 | 12.2 | 21,800 | 17,400 | 23,600 | 8.3 | 14,500 | 1347232 |
| | CA*F3636*6B*+TXV | A*V90453B** | 23,600 | 17,700 | 14.5 | 12.2 | 21,800 | 17,400 | 23,600 | 8.3 | 14,500 | 1430182 |
| | CA*F3636*6B*+TXV | A*V90704C** | 23,600 | 17,700 | 14.5 | 12.2 | 21,800 | 17,400 | 23,600 | 8.3 | 14,500 | 1444039 |
| | CA*F3636*6B*+TXV | G*V950704C** | 23,600 | 17,700 | 14.5 | 12.2 | 21,800 | 17,400 | 23,000 | 8.3 | 14,500 | 1464060 |
| | CA*F3636*6B*+TXV | G*V90704C** | 23,600 | 17,700 | 14.5 | 12.2 | 21,800 | 17,400 | 23,600 | 8.3 | 14,500 | 3055727 |
| | CA*F3636*6B*+TXV | A*VC90704CXA* | 23,600 | 17,700 | 14.5 | 12.2 | 21,800 | 17,400 | 23,600 | 8.3 | 14,500 | 3598985 |
| | CA*F3636*6B*+TXV | A*VC950704CXA* | 23,600 | 17,700 | 14.5 | 12.2 | 21,800 | 17,400 | 23,600 | 8.3 | 14,500 | 3598995 |
| | CA*F3636*6B*+TXV | G*VC90704CXA* | 23,600 | 17,700 | 14.5 | 12.2 | 21,800 | 17,400 | 23,600 | 8.3 | 14,500 | 3599013 |
| | CA*F3636*6B*+TXV | G*VC950453BXA* | 23,600 | 17,700 | 14.5 | 12.2 | 21,800 | 17,400 | 23,600 | 8.3 | 14,500 | 3599184 |
| | CA*F3636*6B*+TXV | G*VC950704CXA* | 23,600 | 17,700 | 14.5 | 12.2 | 21,800 | 17,400 | 23,000 | 8.3 | 14,500 | 3599231 |
| | CA*F3636*6B*+TXV | G*E80703B** | 23,600 | 17,700 | 15.0 | 12.5 | 21,800 | 17,400 | 23,000 | 8.3 | 14,500 | 3603257 |
| | CA*F3636*6C*+EHP+TXV | | 24,000 | 18,000 | 14.0 | 12.0 | 22,200 | 17,800 | 24,400 | 8.2 | 14,000 | 3422841 |
| | CA*F3636*6C*+TXV | MBE1200**1B* | 24,000 | 18,000 | 15.0 | 12.5 | 22,200 | 17,800 | 24,000 | 8.3 | 14,500 | 3422764 |
| | CA*F3636*6C*+TXV | MBE1600**1B* | 24,400 | 18,300 | 15.0 | 13.0 | 22,600 | 18,100 | 22,000 | 8.5 | 12,000 | 3422765 |
| | CA*F3636*6C*+TXV | MBR0800**1 | 24,000 | 18,000 | 14.0 | 12.0 | 22,200 | 17,800 | 24,000 | 8.2 | 14,500 | 3422842 |
| | CA*F3636*6C*+TXV | MBVC1200**1A* | 24,000 | 18,000 | 15.0 | 12.5 | 22,200 | 17,800 | 24,000 | 8.3 | 14,500 | 3609929 |
| | CA*F3636*6C*+TXV | MBVC1600**1A* | 24,400 | 18,300 | 15.0 | 13.0 | 22,600 | 18,100 | 22,000 | 8.5 | 12,000 | 3609933 |
| | CA*F3636*6C*+TXV | A*V90453B** | 23,600 | 17,700 | 14.5 | 12.2 | 21,800 | 17,400 | 23,600 | 8.3 | 14,500 | 3422766 |
| | CA*F3636*6C*+TXV | A*V90704C** | 23,600 | 17,700 | 14.5 | 12.2 | 21,800 | 17,400 | 23,600 | 8.3 | 14,500 | 3422767 |
| | CA*F3636*6C*+TXV | G*E80704B** | 23,600 | 17,700 | 15.0 | 12.5 | 21,800 | 17,400 | 23,000 | 8.3 | 14,500 | 3422768 |
| | CA*F3636*6C*+TXV | G*V90704C** | 23,600 | 17,700 | 14.5 | 12.2 | 21,800 | 17,400 | 23,600 | 8.3 | 14,500 | 3422769 |
| | CA*F3636*6C*+TXV | G*V950453B** | 23,600 | 17,700 | 14.5 | 12.2 | 21,800 | 17,400 | 23,600 | 8.3 | 14,500 | 3422770 |
| | CA*F3636*6C*+TXV | G*V950704C** | 23,600 | 17,700 | 14.5 | 12.2 | 21,800 | 17,400 | 23,000 | 8.3 | 14,500 | 3422771 |
| | CA*F3636*6C*+TXV | A*VC90704CXA* | 23,600 | 17,700 | 14.5 | 12.2 | 21,800 | 17,400 | 23,600 | 8.3 | 14,500 | 3598986 |
| | CA*F3636*6C*+TXV | A*VC950704CXA* | 23,600 | 17,700 | 14.5 | 12.2 | 21,800 | 17,400 | 23,600 | 8.3 | 14,500 | 3598996 |
| | CA*F3636*6C*+TXV | G*VC90704CXA* | 23,600 | 17,700 | 14.5 | 12.2 | 21,800 | 17,400 | 23,600 | 8.3 | 14,500 | 3599014 |
| | CA*F3636*6C*+TXV | G*VC950453BXA* | 23,600 | 17,700 | 14.5 | 12.2 | 21,800 | 17,400 | 23,600 | 8.3 | 14,500 | 3599185 |
| | CA*F3636*6C*+TXV | G*VC950704CXA* | 23,600 | 17,700 | 14.5 | 12.2 | 21,800 | 17,400 | 23,000 | 8.3 | 14,500 | 3599232 |
| | CA*F3636*6C*+TXV | G*E80703B** | 23,600 | 17,700 | 15.0 | 12.5 | 21,800 | 17,400 | 23,000 | 8.3 | 14,500 | 3603308 |
| | CHPF3636B6B*+EHP+TXV | | 24,000 | 18,000 | 14.0 | 12.0 | 22,200 | 17,800 | 24,400 | 8.2 | 14,000 | 1330361 |
| | CHPF3636B6B*+TXV | MBE1200**1A* | 24,000 | 18,000 | 15.0 | 12.5 | 22,200 | 17,800 | 24,000 | 8.5 | 14,500 | 1330425 |
| | CHPF3636B6B*+TXV | G*V950453B** | 24,000 | 18,000 | 14.5 | 12.2 | 22,200 | 17,800 | 24,000 | 8.3 | 14,500 | 1330427 |
| | CHPF3636B6B*+TXV | G*E80704B** | 24,000 | 18,000 | 15.0 | 12.5 | 22,200 | 17,800 | 24,000 | 8.3 | 14,500 | 1347589 |
| | CHPF3636B6B*+TXV | G*VC950453BXA* | 24,000 | 18,000 | 14.5 | 12.2 | 22,200 | 17,800 | 24,000 | 8.3 | 14,500 | 3599190 |
| | CHPF3636B6B*+TXV | G*E80703B** | 24,000 | 18,000 | 15.0 | 12.5 | 22,200 | 17,800 | 24,000 | 8.3 | 14,500 | 3603263 |
| | CHPF3636B6C*+EHP+TXV | | 24,000 | 18,000 | 14.0 | 12.0 | 22,200 | 17,800 | 24,400 | 8.2 | 14,000 | 3300354 |
| | CHPF3636B6C*+TXV | MBE1200**1B* | 24,000 | 18,000 | 15.0 | 12.5 | 22,200 | 17,800 | 24,000 | 8.5 | 14,500 | 3300355 |
| | CHPF3636B6C*+TXV | MBR0800**1 | 24,000 | 18,000 | 14.0 | 12.0 | 22,200 | 17,800 | 24,000 | 8.2 | 14,500 | 3300356 |
| | CHPF3636B6C*+TXV | MBVC1200**1A* | 24,000 | 18,000 | 15.0 | 12.5 | 22,200 | 17,800 | 24,000 | 8.3 | 14,500 | 3610008 |
| | CHPF3636B6C*+TXV | G*E80704B** | 24,000 | 18,000 | 15.0 | 12.5 | 22,200 | 17,800 | 24,000 | 8.3 | 14,500 | 3300357 |
| | CHPF3636B6C*+TXV | G*V950453B** | 24,000 | 18,000 | 14.5 | 12.2 | 22,200 | 17,800 | 24,000 | 8.3 | 14,500 | 3300359 |
| | CHPF3636B6C*+TXV | G*VC950453BXA* | 24,000 | 18,000 | 14.5 | 12.2 | 22,200 | 17,800 | 24,000 | 8.3 | 14,500 | 3599191 |
| | CHPF3636B6C*+TXV | G*E80703B** | 24,000 | 18,000 | 15.0 | 12.5 | 22,200 | 17,800 | 24,000 | 8.3 | 14,500 | 3603298 |
| | CHPF3642C6C*+TXV | MBE1600**1B* | 24,000 | 18,000 | 15.0 | 12.5 | 22,200 | 17,800 | 22,000 | 8.5 | 12,000 | 3606067 |
| | CHPF3642C6C*+TXV | MBVC1600**1A* | 24,000 | 18,000 | 15.0 | 12.5 | 22,200 | 17,800 | 22,000 | 8.5 | 12,000 | 3610014 |
| | CSCF3036N6B*+TXV | G*E80704B** | 24,000 | 18,000 | 15.0 | 12.5 | 22,200 | 17,800 | 24,000 | 8.3 | 14,500 | 1296660 |
| | CSCF3036N6B*+TXV | G*V950453B** | 24,000 | 18,000 | 14.5 | 12.2 | 22,200 | 17,800 | 24,000 | 8.3 | 14,500 | 1296662 |
| | CSCF3036N6B*+TXV | G*VC950453BXA* | 24,000 | 18,000 | 14.5 | 12.2 | 22,200 | 17,800 | 24,000 | 8.3 | 14,500 | 3599189 |
| CSCF3036N6B*+TXV | G*E80703B** | 24,000 | 18,000 | 15.0 | 12.5 | 22,200 | 17,800 | 24,000 | 8.3 | 14,500 | 3603251 | |
| CT*F3636*6A*+TXV | MBE1200**1 | 24,000 | 18,000 | 15.0 | 12.5 | 22,200 | 17,800 | 24,000 | 8.3 | 14,500 | 1450091 | |
| CT*F3636*6A*+TXV | MBE1600**1 | 24,400 | 18,300 | 15.0 | 13.0 | 22,600 | 18,100 | 22,000 | 8.5 | 12,000 | 1450092 | |
| CT*F3636*6A*+TXV | MBR0800**1 | 24,000 | 18,000 | 14.0 | 12.0 | 22,200 | 17,800 | 24,000 | 8.2 | 14,500 | 1450093 | |
| CT*F3636*6A*+TXV | MBVC1200**1A* | 24,000 | 18,000 | 15.0 | 12.5 | 22,200 | 17,800 | 24,000 | 8.3 | 14,500 | 3610097 | |
| CT*F3636*6A*+TXV | MBVC1600**1A* | 24,400 | 18,300 | 15.0 | 13.0 | 22,600 | 18,100 | 22,000 | 8.5 | 12,000 | 3610100 | |
| CT*F3636*6A*+TXV | G*E80704B** | 23,600 | 17,700 | 15.0 | 12.5 | 21,800 | 17,400 | 23,000 | 8.3 | 14,500 | 1450094 | |
| CT*F3636*6A*+TXV | G*E80703B** | 23,600 | 17,700 | 15.0 | 12.5 | 21,800 | 17,400 | 23,000 | 8.3 | 14,500 | 3603276 | |

AHRI PERFORMANCE RATINGS (CONT.)

| OUTDOOR UNIT | INDOOR UNITS | | COOLING CAPACITY (BTU/H) | | | | TVA RATINGS ³ | | HEATING CAPACITY | | | AHRI # |
|----------------------|----------------------|-----------------|--------------------------|--------|-------------------|------------------|--------------------------|--------|------------------|-------------------|---------|---------|
| | COILS & AIR HANDLERS | FURNACE/BLOWER | TOTAL | SENS. | SEER ¹ | EER ² | TOTAL | SENS. | HIGH | HSPF ⁴ | LOW | |
| SSZ14 0301A* | AEPF303616C*+TXV | | 30,000 | 23,400 | 15.0 | 13.0 | 27,800 | 23,400 | 28,000 | 8.5 | 18,000 | 1443962 |
| | AEPF313716A*+TXV | | 30,000 | 23,400 | 15.0 | 13.0 | 27,800 | 23,400 | 28,000 | 8.5 | 18,000 | 3305556 |
| | AR*F193116B*+TXV | | 28,800 | 22,500 | 14.0 | 12.0 | 26,600 | 22,300 | 28,000 | 8.6 | 18,000 | 1492626 |
| | AR*F303016B*+TXV | | 27,000 | 21,100 | 13.5 | 11.0 | 25,000 | 21,000 | 23,000 | 8.3 | 18,000 | 1492627 |
| | ASPF303616B*+TXV | | 30,000 | 23,400 | 15.0 | 13.0 | 27,800 | 23,400 | 28,000 | 8.5 | 18,000 | 1443989 |
| | ASPF313716A*+TXV | | 30,000 | 23,400 | 15.0 | 13.0 | 27,800 | 23,400 | 28,000 | 8.5 | 18,000 | 3305557 |
| | AT*F193116A*+TXV | | 28,800 | 22,500 | 14.0 | 12.0 | 26,600 | 22,300 | 28,000 | 8.5 | 18,000 | 1483555 |
| | AT*F303016A*+TXV | | 27,000 | 21,100 | 13.5 | 11.0 | 25,000 | 21,000 | 23,000 | 8.3 | 18,000 | 1483556 |
| | AWUF31XX16A* | | 28,800 | 22,500 | 14.0 | 12.0 | 26,600 | 22,300 | 28,000 | 8.5 | 18,000 | 3853216 |
| | AWUF31XX16A*+TXV | | 28,800 | 22,500 | 14.5 | 12.3 | 26,600 | 22,300 | 28,000 | 8.5 | 18,000 | 3853251 |
| | AWUF32XX16A* | | 28,800 | 22,500 | 14.0 | 12.0 | 26,600 | 22,300 | 28,000 | 8.5 | 18,000 | 3853217 |
| | AWUF32XX16A*+TXV | | 28,800 | 22,500 | 14.5 | 12.3 | 26,600 | 22,300 | 28,000 | 8.5 | 18,000 | 3853252 |
| | CA*F3636*6B*+EEP+TXV | | 28,800 | 22,500 | 14.0 | 12.0 | 26,600 | 22,300 | 28,000 | 8.5 | 18,000 | 1346753 |
| | CA*F3636*6B*+TXV | MBE1200** -1 | 28,800 | 22,500 | 15.0 | 13.0 | 26,600 | 22,300 | 28,000 | 8.5 | 18,000 | 1346754 |
| | CA*F3636*6B*+TXV | G*V950453B** | 28,800 | 22,500 | 15.0 | 12.0 | 26,600 | 22,300 | 28,000 | 8.5 | 18,000 | 1346755 |
| | CA*F3636*6B*+TXV | G*V950704C** | 28,800 | 22,500 | 15.0 | 12.0 | 26,600 | 22,300 | 28,000 | 8.5 | 18,000 | 1346756 |
| | CA*F3636*6B*+TXV | G*VC950453BXA* | 28,800 | 22,500 | 15.0 | 12.0 | 26,600 | 22,300 | 28,000 | 8.5 | 18,000 | 3599207 |
| | CA*F3636*6B*+TXV | G*VC950704CXA* | 28,800 | 22,500 | 15.0 | 12.0 | 26,600 | 22,300 | 28,000 | 8.5 | 18,000 | 3599266 |
| | CA*F3636*6C*+EEP+TXV | | 28,800 | 22,500 | 14.0 | 12.0 | 26,600 | 22,300 | 28,000 | 8.5 | 18,000 | 3422843 |
| | CA*F3636*6C*+TXV | MBE1200** -1B* | 28,800 | 22,500 | 15.0 | 13.0 | 26,600 | 22,300 | 28,000 | 8.5 | 18,000 | 3422772 |
| | CA*F3636*6C*+TXV | MBVC1200** -1A* | 28,800 | 22,500 | 15.0 | 13.0 | 26,600 | 22,300 | 28,000 | 8.5 | 18,000 | 3609930 |
| | CA*F3636*6C*+TXV | G*V950453B** | 28,800 | 22,500 | 15.0 | 12.0 | 26,600 | 22,300 | 28,000 | 8.5 | 18,000 | 3422773 |
| | CA*F3636*6C*+TXV | G*V950704C** | 28,800 | 22,500 | 15.0 | 12.0 | 26,600 | 22,300 | 28,000 | 8.5 | 18,000 | 3422775 |
| | CA*F3636*6C*+TXV | G*VC950453BXA* | 28,800 | 22,500 | 15.0 | 12.0 | 26,600 | 22,300 | 28,000 | 8.5 | 18,000 | 3599209 |
| | CA*F3636*6C*+TXV | G*VC950704CXA* | 28,800 | 22,500 | 15.0 | 12.0 | 26,600 | 22,300 | 28,000 | 8.5 | 18,000 | 3599270 |
| | CA*F3743*6A*+EEP+TXV | | 28,400 | 22,200 | 14.0 | 12.0 | 26,300 | 22,100 | 28,800 | 8.5 | 18,000 | 1401104 |
| | CA*F3743*6A*+EEP+TXV | | 28,400 | 22,200 | 14.0 | 12.0 | 26,300 | 22,100 | 28,800 | 8.5 | 18,000 | 3000859 |
| | CA*F3743*6A*+TXV | MBE1600** -1 | 28,800 | 22,500 | 15.0 | 12.5 | 26,600 | 22,300 | 29,000 | 8.5 | 18,000 | 1346757 |
| | CA*F3743*6A*+TXV | MBE1600** -1 | 28,800 | 22,500 | 15.0 | 12.5 | 26,600 | 22,300 | 29,000 | 8.5 | 18,000 | 3000860 |
| | CA*F3743*6A*+TXV | MBR1600** -1 | 28,800 | 22,500 | 14.0 | 12.0 | 26,600 | 22,300 | 29,000 | 8.5 | 18,000 | 1346758 |
| | CA*F3743*6A*+TXV | MBR1600** -1 | 28,800 | 22,500 | 14.0 | 12.0 | 26,600 | 22,300 | 29,000 | 8.5 | 18,000 | 3000861 |
| | CA*F3743*6A*+TXV | MBVC1600** -1A* | 28,800 | 22,500 | 15.0 | 12.5 | 26,600 | 22,300 | 29,000 | 8.5 | 18,000 | 3609952 |
| | CA*F3743*6A*+TXV | G*E80905C** | 28,800 | 22,500 | 14.5 | 12.2 | 26,600 | 22,300 | 29,000 | 8.5 | 18,000 | 1346759 |
| | CA*F3743*6A*+TXV | G*E81155C** | 28,800 | 22,500 | 14.5 | 12.2 | 26,600 | 22,300 | 29,000 | 8.5 | 18,000 | 1346760 |
| | CA*F3743*6A*+TXV | G*V950704C** | 28,800 | 22,500 | 14.5 | 12.0 | 26,600 | 22,300 | 28,000 | 8.5 | 18,000 | 1346763 |
| | CA*F3743*6A*+TXV | G*VC950704CXA* | 28,800 | 22,500 | 14.5 | 12.0 | 26,600 | 22,300 | 28,000 | 8.5 | 18,000 | 3599271 |
| | CHPF3642C6B*+TXV | G*E80905C** | 28,800 | 22,500 | 14.5 | 12.2 | 26,600 | 22,300 | 29,000 | 8.5 | 18,000 | 1347591 |
| | CHPF3642C6B*+TXV | G*E81155C** | 28,800 | 22,500 | 14.5 | 12.2 | 26,600 | 22,300 | 29,000 | 8.5 | 18,000 | 1347593 |
| | CHPF3642C6C*+EEP+TXV | | 28,800 | 22,500 | 14.0 | 12.0 | 26,600 | 22,300 | 28,000 | 8.5 | 18,000 | 3300360 |
| | CHPF3642C6C*+TXV | MBE1600** -1B* | 28,800 | 22,500 | 15.0 | 12.5 | 26,600 | 22,300 | 29,000 | 8.5 | 18,000 | 3300361 |
| | CHPF3642C6C*+TXV | MBR1600** -1 | 28,800 | 22,500 | 14.0 | 12.0 | 26,600 | 22,300 | 29,000 | 8.5 | 18,000 | 3300362 |
| | CHPF3642C6C*+TXV | MBVC1600** -1A* | 28,800 | 22,500 | 15.0 | 12.5 | 26,600 | 22,300 | 29,000 | 8.5 | 18,000 | 3610015 |
| | CHPF3642C6C*+TXV | G*E80905C** | 28,800 | 22,500 | 14.5 | 12.2 | 26,600 | 22,300 | 29,000 | 8.5 | 18,000 | 3300363 |
| | CHPF3642C6C*+TXV | G*E81155C** | 28,800 | 22,500 | 14.5 | 12.2 | 26,600 | 22,300 | 29,000 | 8.5 | 18,000 | 3300364 |
| | CHPF3642C6C*+TXV | G*V950704C** | 28,800 | 22,500 | 14.5 | 12.2 | 26,600 | 22,300 | 29,000 | 8.5 | 18,000 | 3300367 |
| | CHPF3642C6C*+TXV | G*VC950704CXA* | 28,800 | 22,500 | 14.5 | 12.2 | 26,600 | 22,300 | 29,000 | 8.5 | 18,000 | 3599268 |
| | CHPF3743C6A*+TXV | MBE1600** -1A* | 28,800 | 22,500 | 15.0 | 12.5 | 26,600 | 22,300 | 29,000 | 8.5 | 18,000 | 1330363 |
| | CHPF3743C6A*+TXV | MBR1600** -1A* | 28,800 | 22,500 | 14.0 | 12.0 | 26,600 | 22,300 | 29,000 | 8.5 | 18,000 | 1330364 |
| | CHPF3743C6A*+TXV | G*V950704C** | 28,800 | 22,500 | 14.5 | 12.2 | 26,600 | 22,300 | 29,000 | 8.5 | 18,000 | 1330430 |
| | CHPF3743C6A*+TXV | G*VC950704CXA* | 28,800 | 22,500 | 14.5 | 12.2 | 26,600 | 22,300 | 29,000 | 8.5 | 18,000 | 3599265 |
| CHPF3743C6A*+EEP+TXV | | 28,800 | 22,500 | 14.0 | 12.0 | 26,600 | 22,300 | 28,000 | 8.5 | 18,000 | 1330362 | |
| CHPF3743C6B*+EEP+TXV | | 28,800 | 22,500 | 14.0 | 12.0 | 26,600 | 22,300 | 28,000 | 8.5 | 18,000 | 3300368 | |
| CHPF3743C6B*+TXV | MBE1600** -1B* | 28,800 | 22,500 | 15.0 | 12.5 | 26,600 | 22,300 | 29,000 | 8.5 | 18,000 | 3300369 | |
| CHPF3743C6B*+TXV | MBR1600** -1 | 28,800 | 22,500 | 14.0 | 12.0 | 26,600 | 22,300 | 29,000 | 8.5 | 18,000 | 3300370 | |
| CHPF3743C6B*+TXV | MBVC1600** -1A* | 28,800 | 22,500 | 15.0 | 12.5 | 26,600 | 22,300 | 29,000 | 8.5 | 18,000 | 3610024 | |

See Notes on Page 32.

AHRI PERFORMANCE RATINGS (CONT.)

| OUTDOOR UNIT | INDOOR UNITS | | COOLING CAPACITY (BTU/H) | | | | TVA RATINGS ³ | | HEATING CAPACITY | | | AHRI # |
|----------------------------|----------------------|----------------|--------------------------|--------|-------------------|------------------|--------------------------|--------|------------------|-------------------|---------|---------|
| | COILS & AIR HANDLERS | FURNACE/BLOWER | TOTAL | SENS. | SEER ¹ | EER ² | TOTAL | SENS. | HIGH | HSPF ⁴ | LOW | |
| SSZ14 0301A* (cont.) | CHPF3743C6B*+TXV | G*V950704C** | 28,800 | 22,500 | 14.5 | 12.2 | 26,600 | 22,300 | 29,000 | 8.5 | 18,000 | 3300373 |
| | CHPF3743C6B*+TXV | G*VC950704CXA* | 28,800 | 22,500 | 14.5 | 12.2 | 26,600 | 22,300 | 29,000 | 8.5 | 18,000 | 3599269 |
| | CSCF3642N6C*+TXV | G*E80905C** | 28,800 | 22,500 | 14.5 | 12.2 | 26,600 | 22,300 | 29,000 | 8.5 | 18,000 | 1296592 |
| | CSCF3642N6C*+TXV | G*E81155C** | 28,800 | 22,500 | 14.5 | 12.2 | 26,600 | 22,300 | 29,000 | 8.5 | 18,000 | 1296593 |
| | CSCF3642N6C*+TXV | G*V950704C** | 28,800 | 22,500 | 14.5 | 12.2 | 26,600 | 22,300 | 29,000 | 8.5 | 18,000 | 1296607 |
| | CSCF3642N6C*+TXV | G*VC950704CXA* | 28,800 | 22,500 | 14.5 | 12.2 | 26,600 | 22,300 | 29,000 | 8.5 | 18,000 | 3599264 |
| | CT*F3636*6A*+TXV | MBE1200**1 | 28,800 | 22,500 | 15.0 | 13.0 | 26,600 | 22,300 | 28,000 | 8.5 | 18,000 | 1450096 |
| | CT*F3636*6A*+TXV | MBVC1200**1A* | 28,800 | 22,500 | 15.0 | 13.0 | 26,600 | 22,300 | 28,000 | 8.5 | 18,000 | 3610098 |
| | CT*F3636*6A*+TXV | G*V950453B** | 28,800 | 22,500 | 15.0 | 12.0 | 26,600 | 22,300 | 28,000 | 8.5 | 18,000 | 1450097 |
| | CT*F3636*6A*+TXV | G*V950704C** | 28,800 | 22,500 | 15.0 | 12.0 | 26,600 | 22,300 | 28,000 | 8.5 | 18,000 | 1450098 |
| | CT*F3636*6A*+TXV | G*VC950453BXA* | 28,800 | 22,500 | 15.0 | 12.0 | 26,600 | 22,300 | 28,000 | 8.5 | 18,000 | 3599208 |
| | CT*F3636*6A*+TXV | G*VC950704CXA* | 28,800 | 22,500 | 15.0 | 12.0 | 26,600 | 22,300 | 28,000 | 8.5 | 18,000 | 3599267 |
| | CT*F3642*6A*+EEP+TXV | | 28,400 | 22,200 | 14.0 | 12.0 | 26,300 | 22,100 | 28,800 | 8.5 | 18,000 | 1450099 |
| | CT*F3642*6A*+TXV | MBE1600**1 | 28,800 | 22,500 | 15.0 | 12.5 | 26,600 | 22,300 | 29,000 | 8.5 | 18,000 | 1450100 |
| | CT*F3642*6A*+TXV | MBR1600**1 | 28,800 | 22,500 | 14.0 | 12.0 | 26,600 | 22,300 | 29,000 | 8.5 | 18,000 | 1450101 |
| | CT*F3642*6A*+TXV | MBVC1600**1A* | 28,800 | 22,500 | 15.0 | 12.5 | 26,600 | 22,300 | 29,000 | 8.5 | 18,000 | 3610114 |
| | CT*F3642*6A*+TXV | G*E80905C** | 28,800 | 22,500 | 14.5 | 12.2 | 26,600 | 22,300 | 29,000 | 8.5 | 18,000 | 1450102 |
| | CT*F3642*6A*+TXV | G*E81155C** | 28,800 | 22,500 | 14.5 | 12.2 | 26,600 | 22,300 | 29,000 | 8.5 | 18,000 | 1450103 |
| | CT*F3642*6A*+TXV | G*V950704C** | 28,800 | 22,500 | 14.5 | 12.0 | 26,600 | 22,300 | 28,000 | 8.5 | 18,000 | 1450106 |
| | CT*F3642*6A*+TXV | G*VC950704CXA* | 28,800 | 22,500 | 14.5 | 12.0 | 26,600 | 22,300 | 28,000 | 8.5 | 18,000 | 3599272 |
| SSZ14 0361A* | AEPF313716A* | | 36,000 | 25,900 | 15.0 | 13.0 | 33,300 | 25,600 | 34,600 | 9.0 | 23,600 | 3305560 |
| | AEPF313716A*+TXV | | 36,000 | 25,900 | 15.0 | 13.0 | 33,300 | 25,600 | 34,600 | 9.0 | 23,600 | 3305558 |
| | AEPF426016C* | | 36,000 | 25,900 | 15.0 | 13.0 | 33,300 | 25,600 | 34,600 | 9.0 | 23,600 | 3204590 |
| | AEPF426016C*+TXV | | 36,000 | 25,900 | 15.0 | 12.5 | 33,300 | 25,600 | 34,600 | 9.0 | 23,600 | 3134894 |
| | AR*F374316B* | | 35,000 | 25,200 | 14.0 | 12.0 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 3068853 |
| | AR*F374316B*+TXV | | 35,000 | 25,200 | 14.0 | 12.0 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 1492649 |
| | ASPF313716A* | | 36,000 | 25,900 | 15.0 | 12.5 | 33,300 | 25,600 | 34,600 | 9.0 | 23,600 | 3305561 |
| | ASPF313716A*+TXV | | 36,000 | 25,900 | 15.0 | 12.5 | 33,300 | 25,600 | 34,600 | 9.0 | 23,600 | 3305559 |
| | ASPF426016B* | | 36,000 | 25,900 | 15.0 | 13.0 | 33,300 | 25,600 | 34,600 | 9.0 | 23,600 | 3068859 |
| | ASPF426016B*+TXV | | 36,000 | 25,900 | 15.0 | 13.0 | 33,300 | 25,600 | 34,600 | 9.0 | 23,600 | 1492629 |
| | AT*F363616A* | | 34,600 | 24,900 | 13.5 | 11.8 | 32,000 | 24,600 | 33,000 | 8.3 | 22,000 | 3068860 |
| | AT*F363616A*+TXV | | 34,600 | 24,900 | 13.5 | 11.8 | 32,000 | 24,600 | 33,000 | 8.3 | 22,000 | 1483557 |
| | AT*F374316A* | | 35,000 | 25,200 | 14.0 | 12.0 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 3068861 |
| | AT*F374316A*+TXV | | 35,000 | 25,200 | 14.0 | 12.0 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 1483558 |
| | CA*F4961*6A* | A*V90704C** | 34,600 | 24,900 | 14.5 | 12.2 | 32,000 | 24,600 | 34,600 | 8.5 | 24,000 | 3068885 |
| | CA*F4961*6A* | G*E80905C** | 34,600 | 24,900 | 14.5 | 12.2 | 32,000 | 24,600 | 34,600 | 8.5 | 24,000 | 3068886 |
| | CA*F4961*6A* | G*E81155C** | 34,600 | 24,900 | 14.5 | 12.2 | 32,000 | 24,600 | 34,600 | 8.5 | 24,000 | 3068887 |
| | CA*F4961*6A* | G*V90905D** | 35,000 | 25,200 | 15.0 | 12.5 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 3068890 |
| | CA*F4961*6A* | G*V950704C** | 34,600 | 24,900 | 14.5 | 12.2 | 32,000 | 24,600 | 34,600 | 8.5 | 24,000 | 3068891 |
| | CA*F4961*6A* | G*V950905D** | 35,000 | 25,200 | 15.0 | 12.5 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 3068892 |
| | CA*F4961*6A* | G*V951155D** | 35,000 | 25,200 | 15.0 | 12.5 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 3068893 |
| | CA*F4961*6A* | A*VC90704CXA* | 34,600 | 24,900 | 14.5 | 12.2 | 32,000 | 24,600 | 34,600 | 8.5 | 24,000 | 3598990 |
| | CA*F4961*6A* | A*VC950704CXA* | 34,600 | 24,900 | 14.5 | 12.2 | 32,000 | 24,600 | 34,600 | 8.5 | 24,000 | 3599000 |
| | CA*F4961*6A* | G*VC90905DXA* | 35,000 | 25,200 | 15.0 | 12.5 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 3599062 |
| | CA*F4961*6A* | G*VC950704CXA* | 34,600 | 24,900 | 14.5 | 12.2 | 32,000 | 24,600 | 34,600 | 8.5 | 24,000 | 3599287 |
| | CA*F4961*6A* | G*VC950905DXA* | 35,000 | 25,200 | 15.0 | 12.5 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 3599347 |
| | CA*F4961*6A* | G*VC951155DXA* | 35,000 | 25,200 | 15.0 | 12.5 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 3599497 |
| | CA*F4961*6A* | G*V90704C** | 34,600 | 24,900 | 14.5 | 12.2 | 32,000 | 24,600 | 34,600 | 8.5 | 24,000 | 3606608 |
| | CA*F4961*6A*+EEP | | 36,000 | 25,900 | 14.0 | 12.0 | 33,300 | 25,600 | 34,600 | 9.0 | 23,600 | 3068881 |
| | CA*F4961*6A*+EEP+TXV | | 36,000 | 25,900 | 14.0 | 12.0 | 33,300 | 25,600 | 34,600 | 9.0 | 23,600 | 1347226 |
| | CA*F4961*6A* | MBE1600**1 | 35,000 | 25,200 | 14.5 | 12.2 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 3068882 |
| | CA*F4961*6A*+TXV | MBE1600**1 | 35,000 | 25,200 | 14.5 | 12.2 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 1346764 |
| CA*F4961*6A* | MBE2000**1 | 35,000 | 25,200 | 15.0 | 12.5 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 3068883 | |
| CA*F4961*6A*+TXV | MBE2000**1 | 35,000 | 25,200 | 15.0 | 12.5 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 1346765 | |
| CA*F4961*6A* | MBR1600**1 | 34,600 | 24,900 | 14.0 | 12.0 | 32,000 | 24,600 | 34,600 | 8.8 | 21,600 | 3068884 | |

See Notes on Page 32.

AHRI PERFORMANCE RATINGS (CONT.)

| OUTDOOR UNIT | INDOOR UNITS | | COOLING CAPACITY (BTU/H) | | | | TVA RATINGS ³ | | HEATING CAPACITY | | | AHRI # |
|----------------------------|----------------------|----------------|--------------------------|--------|-------------------|------------------|--------------------------|--------|------------------|-------------------|---------|---------|
| | COILS & AIR HANDLERS | FURNACE/BLOWER | TOTAL | SENS. | SEER ¹ | EER ² | TOTAL | SENS. | HIGH | HSPF ⁴ | LOW | |
| SS214 0361A* (cont.) | CA*F4961*6A*+TXV | MBR1600**-1 | 34,600 | 24,900 | 14.0 | 12.0 | 32,000 | 24,600 | 34,600 | 8.8 | 21,600 | 1346766 |
| | CA*F4961*6A* | MBVC1600**-1A* | 35,000 | 25,200 | 14.5 | 12.2 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 3609966 |
| | CA*F4961*6A*+TXV | MBVC1600**-1A* | 35,000 | 25,200 | 14.5 | 12.2 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 3609972 |
| | CA*F4961*6A* | MBVC2000**-1A* | 35,000 | 25,200 | 15.0 | 12.5 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 3609977 |
| | CA*F4961*6A*+TXV | MBVC2000**-1A* | 35,000 | 25,200 | 15.0 | 12.5 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 3609993 |
| | CA*F4961*6A*+TXV | G*E80905C** | 34,600 | 24,900 | 14.5 | 12.2 | 32,000 | 24,600 | 34,600 | 8.5 | 24,000 | 1346767 |
| | CA*F4961*6A*+TXV | G*E81155C** | 34,600 | 24,900 | 14.5 | 12.2 | 32,000 | 24,600 | 34,600 | 8.5 | 24,000 | 1346768 |
| | CA*F4961*6A*+TXV | G*V90905D** | 35,000 | 25,200 | 15.0 | 12.5 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 1346771 |
| | CA*F4961*6A*+TXV | G*V950704C** | 34,600 | 24,900 | 14.5 | 12.2 | 32,000 | 24,600 | 34,600 | 8.5 | 24,000 | 1346772 |
| | CA*F4961*6A*+TXV | G*V950905D** | 35,000 | 25,200 | 15.0 | 12.5 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 1346773 |
| | CA*F4961*6A*+TXV | G*V951155D** | 35,000 | 25,200 | 15.0 | 12.5 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 1346774 |
| | CA*F4961*6A*+TXV | A*V90704C** | 34,600 | 24,900 | 14.5 | 12.2 | 32,000 | 24,600 | 34,600 | 8.5 | 24,000 | 1430186 |
| | CA*F4961*6A*+TXV | A*VC90704CXA* | 34,600 | 24,900 | 14.5 | 12.2 | 32,000 | 24,600 | 34,600 | 8.5 | 24,000 | 3598989 |
| | CA*F4961*6A*+TXV | A*VC950704CXA* | 34,600 | 24,900 | 14.5 | 12.2 | 32,000 | 24,600 | 34,600 | 8.5 | 24,000 | 3598999 |
| | CA*F4961*6A*+TXV | G*VC90905DXA* | 35,000 | 25,200 | 15.0 | 12.5 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 3599060 |
| | CA*F4961*6A*+TXV | G*VC950704CXA* | 34,600 | 24,900 | 14.5 | 12.2 | 32,000 | 24,600 | 34,600 | 8.5 | 24,000 | 3599285 |
| | CA*F4961*6A*+TXV | G*VC950905DXA* | 35,000 | 25,200 | 15.0 | 12.5 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 3599345 |
| | CA*F4961*6A*+TXV | G*VC951155DXA* | 35,000 | 25,200 | 15.0 | 12.5 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 3599495 |
| | CHPF4860D6C* | G*V90905D** | 34,600 | 24,900 | 15.0 | 12.5 | 32,000 | 24,600 | 34,600 | 9.0 | 21,000 | 3068900 |
| | CHPF4860D6C* | G*V951155D** | 34,600 | 24,900 | 15.0 | 12.5 | 32,000 | 24,600 | 34,600 | 9.0 | 21,000 | 3068901 |
| | CHPF4860D6C* | G*VC90905DXA* | 34,600 | 24,900 | 15.0 | 12.5 | 32,000 | 24,600 | 34,600 | 9.0 | 21,000 | 3599051 |
| | CHPF4860D6C* | G*VC951155DXA* | 34,600 | 24,900 | 15.0 | 12.5 | 32,000 | 24,600 | 34,600 | 9.0 | 21,000 | 3599477 |
| | CHPF4860D6C*+EEP | | 35,000 | 25,200 | 14.0 | 12.0 | 32,400 | 24,900 | 34,600 | 9.0 | 21,000 | 3068898 |
| | CHPF4860D6C*+EEP+TXV | | 35,000 | 25,200 | 14.0 | 12.0 | 32,400 | 24,900 | 34,600 | 9.0 | 21,000 | 1330365 |
| | CHPF4860D6C* | MBE2000**-1A* | 34,600 | 24,900 | 15.0 | 12.5 | 32,000 | 24,600 | 34,600 | 9.0 | 21,000 | 3068899 |
| | CHPF4860D6C*+TXV | MBE2000**-1A* | 34,600 | 24,900 | 15.0 | 12.5 | 32,000 | 24,600 | 34,600 | 9.0 | 21,000 | 1330366 |
| | CHPF4860D6C*+TXV | G*V90905D** | 34,600 | 24,900 | 15.0 | 12.5 | 32,000 | 24,600 | 34,600 | 9.0 | 21,000 | 1330367 |
| | CHPF4860D6C*+TXV | G*V951155D** | 34,600 | 24,900 | 15.0 | 12.5 | 32,000 | 24,600 | 34,600 | 9.0 | 21,000 | 1330368 |
| | CHPF4860D6C*+TXV | G*VC90905DXA* | 34,600 | 24,900 | 15.0 | 12.5 | 32,000 | 24,600 | 34,600 | 9.0 | 21,000 | 3599050 |
| | CHPF4860D6C*+TXV | G*VC951155DXA* | 34,600 | 24,900 | 15.0 | 12.5 | 32,000 | 24,600 | 34,600 | 9.0 | 21,000 | 3599476 |
| | CHPF4860D6D* | G*V90905D** | 34,600 | 24,900 | 15.0 | 12.5 | 32,000 | 24,600 | 34,600 | 9.0 | 21,000 | 3300374 |
| | CHPF4860D6D* | G*V951155D** | 34,600 | 24,900 | 15.0 | 12.5 | 32,000 | 24,600 | 34,600 | 9.0 | 21,000 | 3300375 |
| | CHPF4860D6D* | G*VC90905DXA* | 34,600 | 24,900 | 15.0 | 12.5 | 32,000 | 24,600 | 34,600 | 9.0 | 21,000 | 3599053 |
| | CHPF4860D6D* | G*VC951155DXA* | 34,600 | 24,900 | 15.0 | 12.5 | 32,000 | 24,600 | 34,600 | 9.0 | 21,000 | 3599479 |
| | CHPF4860D6D* | G*V950704C** | 34,600 | 24,900 | 15.0 | 12.5 | 32,000 | 24,600 | 34,600 | 9.0 | 21,000 | 3606609 |
| | CHPF4860D6D* | G*VC950704CXA* | 34,600 | 24,900 | 15.0 | 12.5 | 32,000 | 24,600 | 34,600 | 9.0 | 21,000 | 3635274 |
| | CHPF4860D6D*+EEP | | 35,000 | 25,200 | 14.0 | 12.0 | 32,400 | 24,900 | 34,600 | 9.0 | 21,000 | 3300376 |
| | CHPF4860D6D*+EEP+TXV | | 35,000 | 25,200 | 14.0 | 12.0 | 32,400 | 24,900 | 34,600 | 9.0 | 21,000 | 3300377 |
| | CHPF4860D6D* | MBE2000**-1B* | 34,600 | 24,900 | 15.0 | 12.5 | 32,000 | 24,600 | 34,600 | 9.0 | 21,000 | 3300378 |
| | CHPF4860D6D*+TXV | MBE2000**-1B* | 34,600 | 24,900 | 15.0 | 12.5 | 32,000 | 24,600 | 34,600 | 9.0 | 21,000 | 3300379 |
| | CHPF4860D6D* | MBVC2000**-1A* | 34,600 | 24,900 | 15.0 | 12.5 | 32,000 | 24,600 | 34,600 | 9.0 | 21,000 | 3610038 |
| | CHPF4860D6D*+TXV | MBVC2000**-1A* | 34,600 | 24,900 | 15.0 | 12.5 | 32,000 | 24,600 | 34,600 | 9.0 | 21,000 | 3610055 |
| | CHPF4860D6D*+TXV | G*V90905D** | 34,600 | 24,900 | 15.0 | 12.5 | 32,000 | 24,600 | 34,600 | 9.0 | 21,000 | 3300380 |
| | CHPF4860D6D*+TXV | G*V951155D** | 34,600 | 24,900 | 15.0 | 12.5 | 32,000 | 24,600 | 34,600 | 9.0 | 21,000 | 3300381 |
| | CHPF4860D6D*+TXV | G*VC90905DXA* | 34,600 | 24,900 | 15.0 | 12.5 | 32,000 | 24,600 | 34,600 | 9.0 | 21,000 | 3599054 |
| | CHPF4860D6D*+TXV | G*VC951155DXA* | 34,600 | 24,900 | 15.0 | 12.5 | 32,000 | 24,600 | 34,600 | 9.0 | 21,000 | 3599480 |
| | CSCF4860N6C* | G*V90905D** | 34,600 | 24,900 | 15.0 | 12.5 | 32,000 | 24,600 | 34,600 | 8.8 | 21,000 | 3068904 |
| | CSCF4860N6C* | G*V951155D** | 34,600 | 24,900 | 15.0 | 12.5 | 32,000 | 24,600 | 34,600 | 8.8 | 21,000 | 3068905 |
| | CSCF4860N6C* | G*VC90905DXA* | 34,600 | 24,900 | 15.0 | 12.5 | 32,000 | 24,600 | 34,600 | 8.8 | 21,000 | 3599052 |
| | CSCF4860N6C* | G*VC951155DXA* | 34,600 | 24,900 | 15.0 | 12.5 | 32,000 | 24,600 | 34,600 | 8.8 | 21,000 | 3599478 |
| CSCF4860N6C*+TXV | G*V90905D** | 34,600 | 24,900 | 15.0 | 12.5 | 32,000 | 24,600 | 34,600 | 8.8 | 21,000 | 1296663 | |
| CSCF4860N6C*+TXV | G*V951155D** | 34,600 | 24,900 | 15.0 | 12.5 | 32,000 | 24,600 | 34,600 | 8.8 | 21,000 | 1296664 | |
| CSCF4860N6C*+TXV | G*VC90905DXA* | 34,600 | 24,900 | 15.0 | 12.5 | 32,000 | 24,600 | 34,600 | 8.8 | 21,000 | 3599049 | |
| CSCF4860N6C*+TXV | G*VC951155DXA* | 34,600 | 24,900 | 15.0 | 12.5 | 32,000 | 24,600 | 34,600 | 8.8 | 21,000 | 3599475 | |
| CT*F4860*6A* | G*E80905C** | 34,600 | 24,900 | 14.5 | 12.2 | 32,000 | 24,600 | 34,600 | 8.5 | 24,000 | 3068909 | |

See Notes on Page 32.

AHRI PERFORMANCE RATINGS (CONT.)

| OUTDOOR UNIT | INDOOR UNITS | | COOLING CAPACITY (BTU/H) | | | | TVA RATINGS ³ | | HEATING CAPACITY | | | AHRI # |
|----------------------------|----------------------|-----------------|--------------------------|--------|-------------------|------------------|--------------------------|--------|------------------|-------------------|---------|---------|
| | COILS & AIR HANDLERS | FURNACE/BLOWER | TOTAL | SENS. | SEER ¹ | EER ² | TOTAL | SENS. | HIGH | HSPF ⁴ | LOW | |
| SSZ14 0361A* (cont.) | CT*F4860*6A* | G*E81155C** | 34,600 | 24,900 | 14.5 | 12.2 | 32,000 | 24,600 | 34,600 | 8.5 | 24,000 | 3068910 |
| | CT*F4860*6A* | G*V90905D** | 35,000 | 25,200 | 15.0 | 12.5 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 3068913 |
| | CT*F4860*6A* | G*V950704C** | 34,600 | 24,900 | 14.5 | 12.2 | 32,000 | 24,600 | 34,600 | 8.5 | 24,000 | 3068914 |
| | CT*F4860*6A* | G*V950905D** | 35,000 | 25,200 | 15.0 | 12.5 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 3068915 |
| | CT*F4860*6A* | G*V951155D** | 35,000 | 25,200 | 15.0 | 12.5 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 3068916 |
| | CT*F4860*6A* | G*VC90905DXA* | 35,000 | 25,200 | 15.0 | 12.5 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 3599063 |
| | CT*F4860*6A* | G*VC950704CXA* | 34,600 | 24,900 | 14.5 | 12.2 | 32,000 | 24,600 | 34,600 | 8.5 | 24,000 | 3599288 |
| | CT*F4860*6A* | G*VC950905DXA* | 35,000 | 25,200 | 15.0 | 12.5 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 3599348 |
| | CT*F4860*6A* | G*VC951155DXA* | 35,000 | 25,200 | 15.0 | 12.5 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 3599498 |
| | CT*F4860*6A* | MBE1600** -1 | 35,000 | 25,200 | 14.5 | 12.2 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 3068906 |
| | CT*F4860*6A*+TXV | MBE1600** -1 | 35,000 | 25,200 | 14.5 | 12.2 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 1450107 |
| | CT*F4860*6A* | MBE2000** -1 | 35,000 | 25,200 | 15.0 | 12.5 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 3068907 |
| | CT*F4860*6A*+TXV | MBE2000** -1 | 35,000 | 25,200 | 15.0 | 12.5 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 1450108 |
| | CT*F4860*6A* | MBR1600** -1 | 34,600 | 24,900 | 14.0 | 12.0 | 32,000 | 24,600 | 34,600 | 8.8 | 21,600 | 3068908 |
| | CT*F4860*6A*+TXV | MBR1600** -1 | 34,600 | 24,900 | 14.0 | 12.0 | 32,000 | 24,600 | 34,600 | 8.8 | 21,600 | 1450109 |
| | CT*F4860*6A* | MBVC1600** -1A* | 35,000 | 25,200 | 14.5 | 12.2 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 3610118 |
| | CT*F4860*6A*+TXV | MBVC1600** -1A* | 35,000 | 25,200 | 14.5 | 12.2 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 3610123 |
| | CT*F4860*6A* | MBVC2000** -1A* | 35,000 | 25,200 | 15.0 | 12.5 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 3610130 |
| | CT*F4860*6A*+TXV | MBVC2000** -1A* | 35,000 | 25,200 | 15.0 | 12.5 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 3610151 |
| | CT*F4860*6A*+TXV | G*E80905C** | 34,600 | 24,900 | 14.5 | 12.2 | 32,000 | 24,600 | 34,600 | 8.5 | 24,000 | 1450110 |
| | CT*F4860*6A*+TXV | G*E81155C** | 34,600 | 24,900 | 14.5 | 12.2 | 32,000 | 24,600 | 34,600 | 8.5 | 24,000 | 1450111 |
| | CT*F4860*6A*+TXV | G*V90905D** | 35,000 | 25,200 | 15.0 | 12.5 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 1450114 |
| | CT*F4860*6A*+TXV | G*V950704C** | 34,600 | 24,900 | 14.5 | 12.2 | 32,000 | 24,600 | 34,600 | 8.5 | 24,000 | 1450115 |
| | CT*F4860*6A*+TXV | G*V950905D** | 35,000 | 25,200 | 15.0 | 12.5 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 1450116 |
| | CT*F4860*6A*+TXV | G*V951155D** | 35,000 | 25,200 | 15.0 | 12.5 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 1450117 |
| | CT*F4860*6A*+TXV | G*VC90905DXA* | 35,000 | 25,200 | 15.0 | 12.5 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 3599061 |
| | CT*F4860*6A*+TXV | G*VC950704CXA* | 34,600 | 24,900 | 14.5 | 12.2 | 32,000 | 24,600 | 34,600 | 8.5 | 24,000 | 3599286 |
| | CT*F4860*6A*+TXV | G*VC950905DXA* | 35,000 | 25,200 | 15.0 | 12.5 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 3599346 |
| CT*F4860*6A*+TXV | G*VC951155DXA* | 35,000 | 25,200 | 15.0 | 12.5 | 32,400 | 24,900 | 35,000 | 9.0 | 24,000 | 3599496 | |
| SSZ14 0361B* | AEPF313716A* | | 34,800 | 27,100 | 15.0 | 13.0 | 32,200 | 27,000 | 33,000 | 8.9 | 20,000 | 4260444 |
| | AEPF313716A*+TXV | | 35,400 | 27,600 | 15.0 | 12.7 | 32,700 | 27,500 | 33,000 | 8.9 | 20,000 | 4260445 |
| | AEPF426016C* | | 35,400 | 27,600 | 15.0 | 13.0 | 32,700 | 27,500 | 33,400 | 9.0 | 20,000 | 4260446 |
| | AEPF426016C*+TXV | | 35,400 | 27,600 | 15.0 | 13.0 | 32,700 | 27,500 | 33,400 | 9.0 | 20,000 | 4260447 |
| | AR*F374316B* | | 35,000 | 27,300 | 14.0 | 12.0 | 32,400 | 27,200 | 33,400 | 8.7 | 20,000 | 4260448 |
| | AR*F374316B*+TXV | | 35,000 | 27,300 | 14.0 | 12.0 | 32,400 | 27,200 | 33,000 | 8.7 | 20,000 | 4260449 |
| | ASPF313716A* | | 35,000 | 27,300 | 15.0 | 12.5 | 32,400 | 27,200 | 33,000 | 9.0 | 20,000 | 4260450 |
| | ASPF313716A*+TXV | | 35,000 | 27,300 | 15.0 | 12.5 | 32,400 | 27,200 | 33,000 | 9.0 | 20,000 | 4260451 |
| | ASPF313716D* | | 35,000 | 27,300 | 15.0 | 12.5 | 32,400 | 27,200 | 33,000 | 9.0 | 20,000 | 4260452 |
| | ASPF313716D*+TXV | | 35,000 | 27,300 | 15.0 | 12.5 | 32,400 | 27,200 | 33,000 | 9.0 | 20,000 | 4260453 |
| | ASPF426016B* | | 35,400 | 27,600 | 15.0 | 13.0 | 32,700 | 27,500 | 33,000 | 9.0 | 20,000 | 4260454 |
| | ASPF426016B*+TXV | | 35,400 | 27,600 | 15.0 | 13.0 | 32,700 | 27,500 | 33,000 | 9.0 | 20,000 | 4260455 |
| | ASPF426016D* | | 35,400 | 27,600 | 15.0 | 13.0 | 32,700 | 27,500 | 33,000 | 9.0 | 20,000 | 4260456 |
| | ASPF426016D*+TXV | | 35,400 | 27,600 | 15.0 | 13.0 | 32,700 | 27,500 | 33,000 | 9.0 | 20,000 | 4260457 |
| | CA*F4961*6A* | G*E80905C** | 34,600 | 26,900 | 14.5 | 12.2 | 32,000 | 26,900 | 33,400 | 8.5 | 20,000 | 4261878 |
| | CA*F4961*6A* | G*VC951155DXA* | 35,000 | 27,300 | 15.0 | 12.5 | 32,400 | 27,200 | 33,400 | 8.8 | 20,000 | 4260459 |
| | CA*F4961*6A* | G*E81155C** | 34,600 | 26,900 | 14.5 | 12.2 | 32,000 | 26,900 | 33,400 | 8.5 | 20,000 | 4261877 |
| | CA*F4961*6A* | A*VC90704CXA* | 34,600 | 26,900 | 14.5 | 12.2 | 32,000 | 26,900 | 33,400 | 8.5 | 20,000 | 4260460 |
| | CA*F4961*6A* | G*VC90905DXA* | 35,000 | 27,300 | 15.0 | 12.5 | 32,400 | 27,200 | 33,400 | 8.8 | 20,000 | 4260461 |
| | CA*F4961*6A* | G*VC950714CXA* | 34,600 | 26,900 | 14.5 | 12.2 | 32,000 | 26,900 | 33,400 | 8.5 | 20,000 | 4260465 |
| | CA*F4961*6A* | G*VC950905DXA* | 35,000 | 27,300 | 15.0 | 12.5 | 32,400 | 27,200 | 33,400 | 8.9 | 20,000 | 4260463 |
| | CA*F4961*6A* | A*VC950714CXA* | 34,600 | 26,900 | 14.5 | 12.2 | 32,000 | 26,900 | 33,400 | 8.5 | 20,000 | 4261879 |
| | CA*F4961*6A* | G*VC950905CXA* | 35,000 | 27,300 | 15.0 | 12.5 | 32,400 | 27,200 | 33,400 | 8.7 | 20,000 | 4260466 |
| | CA*F4961*6A* | G*VC950704CXA* | 34,600 | 26,900 | 14.5 | 12.2 | 32,000 | 26,900 | 33,400 | 8.5 | 20,000 | 4260458 |
| | CA*F4961*6A* | A*VC950704CXA* | 34,600 | 26,900 | 14.5 | 12.2 | 32,000 | 26,900 | 33,400 | 8.5 | 20,000 | 4260464 |
| | CA*F4961*6A* | G*VC950915DXA* | 35,000 | 27,300 | 15.0 | 12.5 | 32,400 | 27,200 | 33,400 | 8.7 | 20,000 | 4260462 |

See Notes on Page 32.

AHRI PERFORMANCE RATINGS (CONT.)

| OUTDOOR UNIT | INDOOR UNITS | | COOLING CAPACITY (BTU/H) | | | | TVA RATINGS ³ | | HEATING CAPACITY | | | AHRI # | |
|----------------------------|----------------------------|-----------------|--------------------------|--------|-------------------|------------------|--------------------------|--------|------------------|-------------------|---------|---------|---------|
| | COILS & AIR HANDLERS | FURNACE/BLOWER | TOTAL | SENS. | SEER ¹ | EER ² | TOTAL | SENS. | HIGH | HSPF ⁴ | LOW | | |
| SSZ14 0361B* (cont.) | CA*F4961*6A*+EEP | | 34,800 | 27,100 | 14.0 | 12.0 | 32,200 | 27,000 | 33,400 | 8.5 | 20,000 | 4260467 | |
| | CA*F4961*6A*+EEP+TXV | | 35,000 | 27,300 | 14.0 | 12.0 | 32,400 | 27,200 | 33,400 | 8.5 | 20,000 | 4260468 | |
| | CA*F4961*6A* | MBE1600** -1 | 35,000 | 27,300 | 14.5 | 12.2 | 32,400 | 27,200 | 33,400 | 8.8 | 20,000 | 4260469 | |
| | CA*F4961*6A*+TXV | MBE1600** -1 | 35,000 | 27,300 | 14.5 | 12.2 | 32,400 | 27,200 | 33,400 | 8.8 | 20,000 | 4260470 | |
| | CA*F4961*6A* | MBE2000** -1 | 35,000 | 27,300 | 15.0 | 13.0 | 32,400 | 27,200 | 33,000 | 9.0 | 20,000 | 4260471 | |
| | CA*F4961*6A*+TXV | MBE2000** -1 | 35,000 | 27,300 | 15.0 | 13.0 | 32,400 | 27,200 | 33,000 | 9.0 | 20,000 | 4260472 | |
| | CA*F4961*6A* | MBR1600** -1 | 34,600 | 26,900 | 14.0 | 12.0 | 32,000 | 26,900 | 33,400 | 8.5 | 20,000 | 4260473 | |
| | CA*F4961*6A*+TXV | MBR1600** -1 | 34,600 | 26,900 | 14.0 | 12.0 | 32,000 | 26,900 | 33,400 | 8.5 | 20,000 | 4260474 | |
| | CA*F4961*6A* | MBVC1600** -1A* | 35,000 | 27,300 | 14.5 | 12.2 | 32,400 | 27,200 | 33,000 | 9.0 | 20,000 | 4260475 | |
| | CA*F4961*6A*+TXV | MBVC1600** -1A* | 35,000 | 27,300 | 14.5 | 12.2 | 32,400 | 27,200 | 33,000 | 9.0 | 20,000 | 4260476 | |
| | CA*F4961*6A* | MBVC2000** -1A* | 35,000 | 27,300 | 15.0 | 13.0 | 32,400 | 27,200 | 33,000 | 9.0 | 20,000 | 4260477 | |
| | CA*F4961*6A*+TXV | MBVC2000** -1A* | 35,000 | 27,300 | 15.0 | 13.0 | 32,400 | 27,200 | 33,000 | 9.0 | 20,000 | 4260478 | |
| | CA*F4961*6A*+TXV | G*VC90905DXA* | 35,000 | 27,300 | 15.0 | 12.5 | 32,400 | 27,200 | 33,400 | 8.8 | 20,000 | 4260479 | |
| | CA*F4961*6A*+TXV | G*VC951155DXA* | 35,000 | 27,300 | 15.0 | 12.5 | 32,400 | 27,200 | 33,400 | 8.8 | 20,000 | 4260481 | |
| | CA*F4961*6A*+TXV | A*VC90704CXA* | 34,600 | 26,900 | 14.5 | 12.2 | 32,000 | 26,900 | 33,400 | 8.5 | 20,000 | 4260480 | |
| | CA*F4961*6A*+TXV | A*VC950704CXA* | 34,600 | 26,900 | 14.5 | 12.2 | 32,000 | 26,900 | 33,400 | 8.5 | 20,000 | 4260485 | |
| | CA*F4961*6A*+TXV | G*E81155C** | 34,600 | 26,900 | 14.5 | 12.2 | 32,000 | 26,900 | 33,400 | 8.5 | 20,000 | 4261883 | |
| | CA*F4961*6A*+TXV | G*VC950905DXA* | 35,000 | 27,300 | 15.0 | 12.5 | 32,400 | 27,200 | 33,400 | 8.9 | 20,000 | 4260484 | |
| | CA*F4961*6A*+TXV | G*VC950704CXA* | 34,600 | 26,900 | 14.5 | 12.2 | 32,000 | 26,900 | 33,400 | 8.5 | 20,000 | 4260486 | |
| | CA*F4961*6A*+TXV | G*VC950915DXA* | 35,000 | 27,300 | 15.0 | 12.5 | 32,400 | 27,200 | 33,400 | 8.8 | 20,000 | 4260487 | |
| | CA*F4961*6A*+TXV | G*E80905C** | 34,600 | 26,900 | 14.5 | 12.2 | 32,000 | 26,900 | 33,400 | 8.5 | 20,000 | 4261882 | |
| | CA*F4961*6A*+TXV | A*VC950714CXA* | 34,600 | 26,900 | 14.5 | 12.2 | 32,000 | 26,900 | 33,400 | 8.5 | 20,000 | 4261880 | |
| | CA*F4961*6A*+TXV | G*VC950714CXA* | 34,600 | 26,900 | 14.5 | 12.2 | 32,000 | 26,900 | 33,400 | 8.5 | 20,000 | 4260482 | |
| | CA*F4961*6A*+TXV | G*E80704B** | 34,000 | 26,500 | 14.5 | 12.0 | 31,400 | 26,400 | 33,000 | 8.8 | 20,000 | 4261881 | |
| | CA*F4961*6A*+TXV | G*VC950905CXA* | 35,000 | 27,300 | 15.0 | 12.5 | 32,400 | 27,200 | 33,400 | 8.7 | 20,000 | 4260483 | |
| | CHPF4860D6C* | G*VC90905DXA* | 34,600 | 26,900 | 15.0 | 12.5 | 32,000 | 26,900 | 33,400 | 8.8 | 20,000 | 4261884 | |
| | SSZ14 0361B* (cont.) | CHPF4860D6C* | A*VC90905DXA* | 34,600 | 26,900 | 15.0 | 12.5 | 32,000 | 26,900 | 33,400 | 8.8 | 20,000 | 4261892 |
| | CHPF4860D6C* | A*VC951155DXA* | 34,600 | 26,900 | 15.0 | 12.5 | 32,000 | 26,900 | 33,400 | 8.8 | 20,000 | 4261891 | |
| | CHPF4860D6C* | G*VC951155DXA* | 34,600 | 26,900 | 15.0 | 12.5 | 32,000 | 26,900 | 33,400 | 8.8 | 20,000 | 4260488 | |
| | CHPF4860D6C*+EEP | | 34,800 | 27,100 | 14.0 | 12.0 | 32,200 | 27,000 | 33,000 | 8.5 | 20,000 | 4260489 | |
| | CHPF4860D6C*+EEP+TXV | | 35,000 | 27,300 | 14.0 | 12.0 | 32,400 | 27,200 | 33,000 | 8.5 | 20,000 | 4260490 | |
| | CHPF4860D6C* | MBE2000** -1A* | 34,600 | 26,900 | 15.0 | 13.0 | 32,000 | 26,900 | 33,000 | 9.0 | 20,000 | 4260491 | |
| | CHPF4860D6C*+TXV | MBE2000** -1A* | 34,600 | 26,900 | 15.0 | 13.0 | 32,000 | 26,900 | 33,000 | 9.0 | 20,000 | 4260492 | |
| | CHPF4860D6C*+TXV | A*VC951155DXA* | 34,600 | 26,900 | 15.0 | 12.5 | 32,000 | 26,900 | 33,400 | 8.8 | 20,000 | 4261894 | |
| | CHPF4860D6C*+TXV | A*VC90905DXA* | 34,600 | 26,900 | 15.0 | 12.5 | 32,000 | 26,900 | 33,400 | 8.8 | 20,000 | 4261893 | |
| | CHPF4860D6C*+TXV | G*VC951155DXA* | 34,600 | 26,900 | 15.0 | 12.5 | 32,000 | 26,900 | 33,400 | 8.8 | 20,000 | 4260493 | |
| | CHPF4860D6C*+TXV | G*VC90905DXA* | 34,600 | 26,900 | 15.0 | 12.5 | 32,000 | 26,900 | 33,400 | 8.8 | 20,000 | 4261885 | |
| | CHPF4860D6D* | A*VC950714CXA* | 34,600 | 26,900 | 15.0 | 12.5 | 32,000 | 26,900 | 33,400 | 8.5 | 20,000 | 4261895 | |
| | CHPF4860D6D* | A*VC951155DXA* | 34,600 | 26,900 | 15.0 | 12.5 | 32,000 | 26,900 | 33,400 | 8.8 | 20,000 | 4261897 | |
| | CHPF4860D6D* | G*VC950714CXA* | 34,600 | 26,900 | 15.0 | 12.5 | 32,000 | 26,900 | 33,400 | 8.5 | 20,000 | 4260494 | |
| | CHPF4860D6D* | A*VC950704CXA* | 34,600 | 26,900 | 15.0 | 12.5 | 32,000 | 26,900 | 33,400 | 8.8 | 20,000 | 4261896 | |
| | CHPF4860D6D* | G*VC951155DXA* | 34,600 | 26,900 | 15.0 | 12.5 | 32,000 | 26,900 | 33,400 | 8.8 | 20,000 | 4260496 | |
| | CHPF4860D6D* | A*VC90905DXA* | 34,600 | 26,900 | 15.0 | 12.5 | 32,000 | 26,900 | 33,400 | 8.8 | 20,000 | 4261898 | |
| | CHPF4860D6D* | G*VC950704CXA* | 34,600 | 26,900 | 15.0 | 12.5 | 32,000 | 26,900 | 33,400 | 8.8 | 20,000 | 4260495 | |
| | CHPF4860D6D* | G*VC90905DXA* | 34,600 | 26,900 | 15.0 | 12.5 | 32,000 | 26,900 | 33,400 | 8.8 | 20,000 | 4261886 | |
| | CHPF4860D6D*+EEP | | 34,800 | 27,100 | 14.0 | 12.0 | 32,200 | 27,000 | 33,000 | 8.6 | 20,000 | 4260497 | |
| | CHPF4860D6D*+EEP+TXV | | 35,000 | 27,300 | 14.0 | 12.0 | 32,400 | 27,200 | 33,000 | 8.6 | 20,000 | 4260498 | |
| | CHPF4860D6D* | MBE2000** -1B* | 34,600 | 26,900 | 15.0 | 13.0 | 32,000 | 26,900 | 33,000 | 9.0 | 20,000 | 4260499 | |
| | CHPF4860D6D*+TXV | MBE2000** -1B* | 34,600 | 26,900 | 15.0 | 13.0 | 32,000 | 26,900 | 33,000 | 9.0 | 20,000 | 4260500 | |
| | CHPF4860D6D* | MBVC2000** -1A* | 34,600 | 26,900 | 15.0 | 13.0 | 32,000 | 26,900 | 33,000 | 9.0 | 20,000 | 4260501 | |
| CHPF4860D6D*+TXV | MBVC2000** -1A* | 34,600 | 26,900 | 15.0 | 13.0 | 32,000 | 26,900 | 33,000 | 9.0 | 20,000 | 4260502 | | |
| CHPF4860D6D*+TXV | A*VC90905DXA* | 34,600 | 26,900 | 15.0 | 12.5 | 32,000 | 26,900 | 33,400 | 8.8 | 20,000 | 4261900 | | |
| CHPF4860D6D*+TXV | A*VC950905DXA* | 34,600 | 26,900 | 15.0 | 12.5 | 32,000 | 26,900 | 33,400 | 8.8 | 20,000 | 4261901 | | |
| CHPF4860D6D*+TXV | G*VC951155DXA* | 34,600 | 26,900 | 15.0 | 12.5 | 32,000 | 26,900 | 33,400 | 8.8 | 20,000 | 4260503 | | |
| CHPF4860D6D*+TXV | G*VC950905DXA* | 34,600 | 26,900 | 15.0 | 12.5 | 32,000 | 26,900 | 33,400 | 8.8 | 20,000 | 4261888 | | |

See Notes on Page 32.

AHRI PERFORMANCE RATINGS (CONT.)

| OUTDOOR UNIT | INDOOR UNITS | | COOLING CAPACITY (BTU/H) | | | | TVA RATINGS ³ | | HEATING CAPACITY | | | AHRI # |
|----------------------------|----------------------|-----------------|--------------------------|--------|-------------------|------------------|--------------------------|--------|------------------|-------------------|---------|---------|
| | COILS & AIR HANDLERS | FURNACE/BLOWER | TOTAL | SENS. | SEER ¹ | EER ² | TOTAL | SENS. | HIGH | HSPF ⁴ | LOW | |
| SSZ14 0361B* (cont.) | CHPF4860D6D*+TXV | A*VC951155DXA* | 34,600 | 26,900 | 15.0 | 12.5 | 32,000 | 26,900 | 33,400 | 8.8 | 20,000 | 4261899 |
| | CHPF4860D6D*+TXV | G*VC90905DXA* | 34,600 | 26,900 | 15.0 | 12.5 | 32,000 | 26,900 | 33,400 | 8.8 | 20,000 | 4261887 |
| | CSCF4860N6C* | A*VC90905DXA* | 34,600 | 26,900 | 15.0 | 12.5 | 32,000 | 26,900 | 33,400 | 8.8 | 20,000 | 4261902 |
| | CSCF4860N6C* | G*VC951155DXA* | 34,600 | 26,900 | 15.0 | 12.5 | 32,000 | 26,900 | 33,400 | 8.8 | 20,000 | 4260504 |
| | CSCF4860N6C* | A*VC951155DXA* | 34,600 | 26,900 | 15.0 | 12.5 | 32,000 | 26,900 | 33,400 | 8.8 | 20,000 | 4261903 |
| | CSCF4860N6C* | G*VC90905DXA* | 34,600 | 26,900 | 15.0 | 12.5 | 32,000 | 26,900 | 33,400 | 8.8 | 20,000 | 4261889 |
| | CSCF4860N6C*+TXV | G*VC951155DXA* | 34,600 | 26,900 | 15.0 | 12.5 | 32,000 | 26,900 | 33,400 | 8.8 | 20,000 | 4260505 |
| | CSCF4860N6C*+TXV | G*VC90905DXA* | 34,600 | 26,900 | 15.0 | 12.5 | 32,000 | 26,900 | 33,400 | 8.8 | 20,000 | 4261890 |
| | CSCF4860N6C*+TXV | A*VC90905DXA* | 34,600 | 26,900 | 15.0 | 12.5 | 32,000 | 26,900 | 33,400 | 8.8 | 20,000 | 4261905 |
| CSCF4860N6C*+TXV | A*VC951155DXA* | 34,600 | 26,900 | 15.0 | 12.5 | 32,000 | 26,900 | 33,400 | 8.8 | 20,000 | 4261904 | |
| SSZ14 0421A* | AEPF426016C* | | 41,000 | 31,600 | 15.0 | 13.0 | 37,900 | 31,100 | 40,000 | 9.0 | 27,400 | 3068919 |
| | AEPF426016C*+TXV | | 41,000 | 31,600 | 15.0 | 13.0 | 37,900 | 31,100 | 40,000 | 9.0 | 27,400 | 1492630 |
| | AR*F374316B* | | 40,000 | 30,800 | 14.0 | 12.0 | 37,000 | 30,300 | 40,000 | 9.0 | 25,000 | 3068920 |
| | AR*F374316B*+TXV | | 40,000 | 30,800 | 14.0 | 12.0 | 37,000 | 30,300 | 40,000 | 9.0 | 25,000 | 1492650 |
| | ASPF426016B* | | 41,000 | 31,600 | 15.0 | 13.0 | 37,900 | 31,100 | 40,000 | 9.0 | 27,400 | 3068924 |
| | ASPF426016B*+TXV | | 41,000 | 31,600 | 15.0 | 13.0 | 37,900 | 31,100 | 40,000 | 9.0 | 27,400 | 1492631 |
| | AT*F374316A* | | 40,000 | 30,800 | 14.0 | 12.0 | 37,000 | 30,300 | 40,000 | 9.0 | 25,000 | 3068925 |
| | AT*F374316A*+TXV | | 40,000 | 30,800 | 14.0 | 12.0 | 37,000 | 30,300 | 40,000 | 9.0 | 25,000 | 1483559 |
| | CA*F4860*6B*+TXV | G*V950704C** | 40,000 | 30,800 | 14.5 | 12.2 | 37,000 | 30,300 | 41,000 | 8.8 | 25,000 | 3070890 |
| | CA*F4860*6B*+TXV | G*VC950704CXA* | 40,000 | 30,800 | 14.5 | 12.2 | 37,000 | 30,300 | 41,000 | 8.8 | 25,000 | 3599314 |
| | CA*F4961*6A* | G*V950905D** | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 3068938 |
| | CA*F4961*6A* | G*V951155D** | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 3068939 |
| | CA*F4961*6A* | G*VC950905DXA* | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 3599392 |
| | CA*F4961*6A* | G*VC951155DXA* | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 3599542 |
| | CA*F4961*6A*+EEP | | 41,000 | 31,600 | 14.0 | 12.0 | 37,900 | 31,100 | 41,000 | 9.0 | 27,400 | 3068935 |
| | CA*F4961*6A*+EEP+TXV | | 41,000 | 31,600 | 14.0 | 12.0 | 37,900 | 31,100 | 41,000 | 9.0 | 27,400 | 1347227 |
| | CA*F4961*6A* | MBE2000** -1 | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 3068936 |
| | CA*F4961*6A*+TXV | MBE2000** -1 | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 1346775 |
| | CA*F4961*6A* | MBR2000** -1 | 40,000 | 30,800 | 14.0 | 12.0 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 3068937 |
| | CA*F4961*6A*+TXV | MBR2000** -1 | 40,000 | 30,800 | 14.0 | 12.0 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 1347181 |
| | CA*F4961*6A* | MBVC2000** -1A* | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 3609978 |
| | CA*F4961*6A*+TXV | MBVC2000** -1A* | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 3609994 |
| | CA*F4961*6A*+TXV | G*V950905D** | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 1346776 |
| | CA*F4961*6A*+TXV | G*V951155D** | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 1346777 |
| | CA*F4961*6A*+TXV | G*VC950905DXA* | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 3599390 |
| | CA*F4961*6A*+TXV | G*VC951155DXA* | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 3599540 |
| | CHPF4860D6C* | G*V950905D** | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 3068947 |
| | CHPF4860D6C* | G*V951155D** | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 3068948 |
| | CHPF4860D6C* | G*VC950905DXA* | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 3599393 |
| | CHPF4860D6C* | G*VC951155DXA* | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 3599543 |
| | CHPF4860D6C*+EEP | | 41,000 | 31,600 | 14.0 | 12.0 | 37,900 | 31,100 | 41,000 | 9.0 | 27,400 | 3068945 |
| | CHPF4860D6C*+EEP+TXV | | 41,000 | 31,600 | 14.0 | 12.0 | 37,900 | 31,100 | 41,000 | 9.0 | 27,400 | 1330369 |
| | CHPF4860D6C* | MBE2000** -1A* | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 3068946 |
| | CHPF4860D6C*+TXV | MBE2000** -1A* | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 1330431 |
| | CHPF4860D6C*+TXV | MBE2000** -1B* | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 8.5 | 25,000 | 3606068 |
| | CHPF4860D6C*+TXV | G*V950905D** | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 1330432 |
| | CHPF4860D6C*+TXV | G*V951155D** | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 1330433 |
| | CHPF4860D6C*+TXV | G*VC950905DXA* | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 3599389 |
| | CHPF4860D6C*+TXV | G*VC951155DXA* | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 3599539 |
| | CHPF4860D6D* | G*V950905D** | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 3300382 |
| | CHPF4860D6D* | G*V951155D** | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 3300383 |
| | CHPF4860D6D* | G*VC950905DXA* | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 3599395 |
| CHPF4860D6D* | G*VC951155DXA* | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 3599545 | |
| CHPF4860D6D*+EEP | | 41,000 | 31,600 | 14.0 | 12.0 | 37,900 | 31,100 | 41,000 | 9.0 | 27,400 | 3300384 | |
| CHPF4860D6D*+EEP+TXV | | 41,000 | 31,600 | 14.0 | 12.0 | 37,900 | 31,100 | 41,000 | 9.0 | 27,400 | 3300385 | |

See Notes on Page 32.

AHRI PERFORMANCE RATINGS (CONT.)

| OUTDOOR UNIT | INDOOR UNITS | | COOLING CAPACITY (BTU/H) | | | | TVA RATINGS ³ | | HEATING CAPACITY | | | AHRI # |
|----------------------------|----------------------|-----------------|--------------------------|--------|-------------------|------------------|--------------------------|--------|------------------|-------------------|---------|---------|
| | COILS & AIR HANDLERS | FURNACE/BLOWER | TOTAL | SENS. | SEER ¹ | EER ² | TOTAL | SENS. | HIGH | HSPF ⁴ | LOW | |
| SSZ14 0421A* (cont.) | CHPF4860D6D* | MBE2000** -1B* | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 3300386 |
| | CHPF4860D6D*+TXV | MBE2000** -1B* | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 3300387 |
| | CHPF4860D6D* | MBVC2000** -1A* | 40,000 | 30,800 | 15.0 | 12.0 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 3610039 |
| | CHPF4860D6D*+TXV | MBVC2000** -1A* | 40,000 | 30,800 | 15.0 | 12.0 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 3610056 |
| | CHPF4860D6D*+TXV | G*V950905D** | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 3300388 |
| | CHPF4860D6D*+TXV | G*V951155D** | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 3300389 |
| | CHPF4860D6D*+TXV | G*VC950905DXA* | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 3599396 |
| | CHPF4860D6D*+TXV | G*VC951155DXA* | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 3599546 |
| | CT*F4860*6A* | G*V950905D** | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 3068955 |
| | CT*F4860*6A* | G*V951155D** | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 3068956 |
| | CT*F4860*6A* | G*VC950905DXA* | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 3599394 |
| | CT*F4860*6A* | G*VC951155DXA* | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 3599544 |
| | CT*F4860*6A* | MBE2000** -1 | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 3068953 |
| | CT*F4860*6A*+TXV | MBE2000** -1 | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 1450118 |
| | CT*F4860*6A* | MBR2000** -1 | 40,000 | 30,800 | 14.0 | 12.0 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 3068954 |
| | CT*F4860*6A*+TXV | MBR2000** -1 | 40,000 | 30,800 | 14.0 | 12.0 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 1450119 |
| | CT*F4860*6A* | MBVC2000** -1A* | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 3610132 |
| | CT*F4860*6A*+TXV | MBVC2000** -1A* | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 3610153 |
| | CT*F4860*6A*+TXV | G*V950905D** | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 1450120 |
| | CT*F4860*6A*+TXV | G*V951155D** | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 1450121 |
| CT*F4860*6A*+TXV | G*VC950905DXA* | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 3599391 | |
| CT*F4860*6A*+TXV | G*VC951155DXA* | 40,000 | 30,800 | 15.0 | 12.5 | 37,000 | 30,300 | 41,000 | 9.0 | 25,000 | 3599541 | |
| SSZ14 0481A* | AEPF426016C* | | 47,000 | 35,700 | 15.0 | 13.0 | 43,500 | 35,200 | 47,000 | 8.8 | 30,000 | 3068959 |
| | AEPF426016C*+TXV | | 47,000 | 35,700 | 15.0 | 13.0 | 43,500 | 35,200 | 47,000 | 8.8 | 30,000 | 1492632 |
| | AR*F374316B* | | 47,000 | 35,700 | 14.0 | 12.0 | 43,500 | 35,200 | 47,000 | 8.5 | 30,000 | 3068960 |
| | AR*F374316B*+TXV | | 47,000 | 35,700 | 14.0 | 12.0 | 43,500 | 35,200 | 47,000 | 8.5 | 30,000 | 1492651 |
| | AR*F486016B*+TXV | | 45,000 | 34,200 | 13.5 | 11.5 | 41,600 | 33,700 | 46,000 | 8.5 | 30,000 | 3060423 |
| | ASPF426016B* | | 47,000 | 35,700 | 15.0 | 13.0 | 43,500 | 35,200 | 47,000 | 8.8 | 30,000 | 3068964 |
| | ASPF426016B*+TXV | | 47,000 | 35,700 | 15.0 | 13.0 | 43,500 | 35,200 | 47,000 | 8.8 | 30,000 | 1492633 |
| | AT*F374316A* | | 47,000 | 35,700 | 14.0 | 12.0 | 43,500 | 35,200 | 47,000 | 8.5 | 30,000 | 3068965 |
| | AT*F374316A*+TXV | | 47,000 | 35,700 | 14.0 | 12.0 | 43,500 | 35,200 | 47,000 | 8.5 | 30,000 | 1483560 |
| | CA*F4961*6A* | G*V950905D** | 46,000 | 35,000 | 14.5 | 12.0 | 42,600 | 34,500 | 47,000 | 8.5 | 30,000 | 3068978 |
| | CA*F4961*6A* | G*V951155D** | 46,000 | 35,000 | 14.5 | 12.0 | 42,600 | 34,500 | 47,000 | 8.5 | 30,000 | 3068979 |
| | CA*F4961*6A* | G*VC950905DXA* | 46,000 | 35,000 | 14.5 | 12.0 | 42,600 | 34,500 | 47,000 | 8.5 | 30,000 | 3599426 |
| | CA*F4961*6A* | G*VC951155DXA* | 46,000 | 35,000 | 14.5 | 12.0 | 42,600 | 34,500 | 47,000 | 8.5 | 30,000 | 3599579 |
| | CA*F4961*6A*+EEP | | 46,000 | 35,000 | 14.0 | 12.0 | 42,600 | 34,500 | 47,000 | 8.8 | 30,000 | 3068974 |
| | CA*F4961*6A*+EEP+TXV | | 46,000 | 35,000 | 14.0 | 12.0 | 42,600 | 34,500 | 47,000 | 8.8 | 30,000 | 1347228 |
| | CA*F4961*6A* | MBE2000** -1 | 46,000 | 35,000 | 15.0 | 12.5 | 42,600 | 34,500 | 46,000 | 9.0 | 30,000 | 3068975 |
| | CA*F4961*6A*+TXV | MBE2000** -1 | 46,000 | 35,000 | 15.0 | 12.5 | 42,600 | 34,500 | 46,000 | 9.0 | 30,000 | 1346778 |
| | CA*F4961*6A* | MBR2000** -1 | 46,000 | 35,000 | 14.0 | 12.0 | 42,600 | 34,500 | 47,000 | 8.5 | 30,000 | 3068976 |
| | CA*F4961*6A*+TXV | MBR2000** -1 | 46,000 | 35,000 | 14.0 | 12.0 | 42,600 | 34,500 | 47,000 | 8.5 | 30,000 | 1347182 |
| | CA*F4961*6A* | MBVC2000** -1A* | 46,000 | 35,000 | 15.0 | 12.5 | 42,600 | 34,500 | 46,000 | 9.0 | 30,000 | 3609979 |
| | CA*F4961*6A*+TXV | MBVC2000** -1A* | 46,000 | 35,000 | 15.0 | 12.5 | 42,600 | 34,500 | 46,000 | 9.0 | 30,000 | 3609995 |
| | CA*F4961*6A*+TXV | G*V951155D** | 46,000 | 35,000 | 14.5 | 12.0 | 42,600 | 34,500 | 47,000 | 8.5 | 30,000 | 1346780 |
| | CA*F4961*6A*+TXV | G*V950905D** | 46,000 | 35,000 | 14.5 | 12.0 | 42,600 | 34,500 | 47,000 | 8.5 | 30,000 | 1347183 |
| | CA*F4961*6A*+TXV | G*VC950905DXA* | 46,000 | 35,000 | 14.5 | 12.0 | 42,600 | 34,500 | 47,000 | 8.5 | 30,000 | 3599424 |
| | CA*F4961*6A*+TXV | G*VC951155DXA* | 46,000 | 35,000 | 14.5 | 12.0 | 42,600 | 34,500 | 47,000 | 8.5 | 30,000 | 3599577 |
| | CHPF4860D6C* | G*V951155D** | 46,000 | 35,000 | 14.5 | 12.0 | 42,600 | 34,500 | 47,000 | 8.5 | 30,000 | 3068985 |
| | CHPF4860D6C* | G*VC951155DXA* | 46,000 | 35,000 | 14.5 | 12.0 | 42,600 | 34,500 | 47,000 | 8.5 | 30,000 | 3599580 |
| CHPF4860D6C*+EEP | | 47,000 | 35,700 | 14.0 | 12.0 | 43,500 | 35,200 | 46,000 | 9.0 | 30,000 | 3068983 | |
| CHPF4860D6C*+EEP+TXV | | 47,000 | 35,700 | 14.0 | 12.0 | 43,500 | 35,200 | 46,000 | 9.0 | 30,000 | 1330370 | |
| CHPF4860D6C*+TXV | MBE2000** -1B* | 46,000 | 35,000 | 15.0 | 12.5 | 42,600 | 34,500 | 46,000 | 8.5 | 30,000 | 3606069 | |

See Notes on Page 32.

AHRI PERFORMANCE RATINGS (CONT.)

| OUTDOOR UNIT | INDOOR UNITS | | COOLING CAPACITY (BTU/H) | | | | TVA RATINGS ³ | | HEATING CAPACITY | | | AHRI # |
|----------------------------|----------------------|-----------------|--------------------------|--------|-------------------|------------------|--------------------------|--------|------------------|-------------------|---------|---------|
| | COILS & AIR HANDLERS | FURNACE/BLOWER | TOTAL | SENS. | SEER ¹ | EER ² | TOTAL | SENS. | HIGH | HSPF ⁴ | LOW | |
| SSZ14 0481A* (cont.) | CHPF4860D6C* | MBR2000** -1A* | 46,000 | 35,000 | 14.5 | 12.0 | 42,600 | 34,500 | 47,000 | 8.5 | 30,000 | 3068984 |
| | CHPF4860D6C*+TXV | MBR2000** -1A* | 46,000 | 35,000 | 14.5 | 12.0 | 42,600 | 34,500 | 47,000 | 8.5 | 30,000 | 1330434 |
| | CHPF4860D6C*+TXV | G*V951155D** | 46,000 | 35,000 | 14.5 | 12.0 | 42,600 | 34,500 | 47,000 | 8.5 | 30,000 | 1330435 |
| | CHPF4860D6C*+TXV | G*VC951155DXA* | 46,000 | 35,000 | 14.5 | 12.0 | 42,600 | 34,500 | 47,000 | 8.5 | 30,000 | 3599576 |
| | CHPF4860D6D* | G*V951155D** | 46,000 | 35,000 | 14.5 | 12.0 | 42,600 | 34,500 | 47,000 | 8.5 | 30,000 | 3300390 |
| | CHPF4860D6D* | G*VC951155DXA* | 46,000 | 35,000 | 14.5 | 12.0 | 42,600 | 34,500 | 47,000 | 8.5 | 30,000 | 3599583 |
| | CHPF4860D6D*+EEP | | 47,000 | 35,700 | 14.0 | 12.0 | 43,500 | 35,200 | 46,000 | 9.0 | 30,000 | 3300391 |
| | CHPF4860D6D*+EEP+TXV | | 47,000 | 35,700 | 14.0 | 12.0 | 43,500 | 35,200 | 46,000 | 9.0 | 30,000 | 3300392 |
| | CHPF4860D6D* | MBR2000** -1 | 46,000 | 35,000 | 14.5 | 12.0 | 42,600 | 34,500 | 47,000 | 8.5 | 30,000 | 3300393 |
| | CHPF4860D6D*+TXV | MBR2000** -1 | 46,000 | 35,000 | 14.5 | 12.0 | 42,600 | 34,500 | 47,000 | 8.5 | 30,000 | 3300394 |
| | CHPF4860D6D* | MBR2000** -1A* | 46,000 | 35,000 | 14.5 | 12.0 | 42,600 | 34,500 | 47,000 | 8.5 | 30,000 | 3300395 |
| | CHPF4860D6D*+TXV | G*V951155D** | 46,000 | 35,000 | 14.5 | 12.0 | 42,600 | 34,500 | 47,000 | 8.5 | 30,000 | 3300396 |
| | CHPF4860D6D*+TXV | G*VC951155DXA* | 46,000 | 35,000 | 14.5 | 12.0 | 42,600 | 34,500 | 47,000 | 8.5 | 30,000 | 3599584 |
| | CSCF4860N6C* | G*V950905D** | 46,000 | 35,000 | 14.5 | 12.0 | 42,600 | 34,500 | 47,000 | 8.5 | 30,000 | 3068988 |
| | CSCF4860N6C* | G*V951155D** | 46,000 | 35,000 | 14.5 | 12.0 | 42,600 | 34,500 | 47,000 | 8.5 | 30,000 | 3068989 |
| | CSCF4860N6C* | G*VC950905DXA* | 46,000 | 35,000 | 14.5 | 12.0 | 42,600 | 34,500 | 47,000 | 8.5 | 30,000 | 3599427 |
| | CSCF4860N6C* | G*VC951155DXA* | 46,000 | 35,000 | 14.5 | 12.0 | 42,600 | 34,500 | 47,000 | 8.5 | 30,000 | 3599581 |
| | CSCF4860N6C*+TXV | G*V950905D** | 46,000 | 35,000 | 14.5 | 12.0 | 42,600 | 34,500 | 47,000 | 8.5 | 30,000 | 1296667 |
| | CSCF4860N6C*+TXV | G*V951155D** | 46,000 | 35,000 | 14.5 | 12.0 | 42,600 | 34,500 | 47,000 | 8.5 | 30,000 | 1296668 |
| | CSCF4860N6C*+TXV | G*VC950905DXA* | 46,000 | 35,000 | 14.5 | 12.0 | 42,600 | 34,500 | 47,000 | 8.5 | 30,000 | 3599423 |
| | CSCF4860N6C*+TXV | G*VC951155DXA* | 46,000 | 35,000 | 14.5 | 12.0 | 42,600 | 34,500 | 47,000 | 8.5 | 30,000 | 3599575 |
| | CT*F4860*6A* | G*V950905D** | 46,000 | 35,000 | 14.5 | 12.0 | 42,600 | 34,500 | 47,000 | 8.5 | 30,000 | 3068993 |
| | CT*F4860*6A* | G*V951155D** | 46,000 | 35,000 | 14.5 | 12.0 | 42,600 | 34,500 | 47,000 | 8.5 | 30,000 | 3068994 |
| | CT*F4860*6A* | G*VC950905DXA* | 46,000 | 35,000 | 14.5 | 12.0 | 42,600 | 34,500 | 47,000 | 8.5 | 30,000 | 3599428 |
| | CT*F4860*6A* | G*VC951155DXA* | 46,000 | 35,000 | 14.5 | 12.0 | 42,600 | 34,500 | 47,000 | 8.5 | 30,000 | 3599582 |
| | CT*F4860*6A* | MBE2000** -1 | 46,000 | 35,000 | 15.0 | 12.5 | 42,600 | 34,500 | 46,000 | 9.0 | 30,000 | 3068990 |
| | CT*F4860*6A*+TXV | MBE2000** -1 | 46,000 | 35,000 | 15.0 | 12.5 | 42,600 | 34,500 | 46,000 | 9.0 | 30,000 | 1450123 |
| | CT*F4860*6A* | MBR2000** -1 | 46,000 | 35,000 | 14.0 | 12.0 | 42,600 | 34,500 | 47,000 | 8.5 | 30,000 | 3068991 |
| | CT*F4860*6A*+TXV | MBR2000** -1 | 46,000 | 35,000 | 14.0 | 12.0 | 42,600 | 34,500 | 47,000 | 8.5 | 30,000 | 1450124 |
| | CT*F4860*6A* | MBVC2000** -1A* | 46,000 | 35,000 | 15.0 | 12.5 | 42,600 | 34,500 | 46,000 | 9.0 | 30,000 | 3610133 |
| | CT*F4860*6A*+TXV | MBVC2000** -1A* | 46,000 | 35,000 | 15.0 | 12.5 | 42,600 | 34,500 | 46,000 | 9.0 | 30,000 | 3610154 |
| | CT*F4860*6A*+TXV | G*V950905D** | 46,000 | 35,000 | 14.5 | 12.0 | 42,600 | 34,500 | 47,000 | 8.5 | 30,000 | 1450122 |
| CT*F4860*6A*+TXV | G*V951155D** | 46,000 | 35,000 | 14.5 | 12.0 | 42,600 | 34,500 | 47,000 | 8.5 | 30,000 | 1450126 | |
| CT*F4860*6A*+TXV | G*VC950905DXA* | 46,000 | 35,000 | 14.5 | 12.0 | 42,600 | 34,500 | 47,000 | 8.5 | 30,000 | 3599425 | |
| CT*F4860*6A*+TXV | G*VC951155DXA* | 46,000 | 35,000 | 14.5 | 12.0 | 42,600 | 34,500 | 47,000 | 8.5 | 30,000 | 3599578 | |
| SSZ14 0601A* | AEPF426016C* | | 57,000 | 42,200 | 14.5 | 12.0 | 52,700 | 41,600 | 59,000 | 8.8 | 39,000 | 3068997 |
| | AEPF426016C*+TXV | | 57,000 | 42,200 | 14.5 | 12.0 | 52,700 | 41,600 | 59,000 | 8.8 | 39,000 | 1492634 |
| | AR*F374316B* | | 57,000 | 42,200 | 13.5 | 11.5 | 52,700 | 41,600 | 57,000 | 8.5 | 33,000 | 3068998 |
| | AR*F374316B*+TXV | | 57,000 | 42,200 | 13.5 | 11.5 | 52,700 | 41,600 | 57,000 | 8.5 | 33,000 | 3018432 |
| | AR*F496116A* | | 57,000 | 42,200 | 14.0 | 12.2 | 52,700 | 41,600 | 57,000 | 8.5 | 33,000 | 3068999 |
| | AR*F496116A*+TXV | | 57,000 | 42,200 | 14.0 | 12.2 | 52,700 | 41,600 | 57,000 | 8.5 | 33,000 | 1492635 |
| | ASPF426016B* | | 57,000 | 42,200 | 14.5 | 12.0 | 52,700 | 41,600 | 59,000 | 8.8 | 39,000 | 3069003 |
| | ASPF426016B*+TXV | | 57,000 | 42,200 | 14.5 | 12.0 | 52,700 | 41,600 | 59,000 | 8.8 | 39,000 | 1492636 |
| | AT*F374316A* | | 57,000 | 42,200 | 13.5 | 11.5 | 52,700 | 41,600 | 57,000 | 8.5 | 33,000 | 3069004 |
| | AT*F374316A*+TXV | | 57,000 | 42,200 | 13.5 | 11.5 | 52,700 | 41,600 | 57,000 | 8.5 | 33,000 | 1483561 |
| | AT*F486016A* | | 57,000 | 42,200 | 13.5 | 11.5 | 52,700 | 41,600 | 57,000 | 8.5 | 33,000 | 3069005 |
| | AT*F486016A*+TXV | | 57,000 | 42,200 | 13.5 | 11.5 | 52,700 | 41,600 | 57,000 | 8.5 | 33,000 | 1483562 |
| | CA*F4961*6A* | G*V950905D** | 56,500 | 41,800 | 14.0 | 12.0 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 3069017 |
| | CA*F4961*6A* | G*V951155D** | 56,500 | 41,800 | 14.0 | 12.0 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 3069018 |
| | CA*F4961*6A* | G*VC950905DXA* | 56,500 | 41,800 | 14.0 | 12.0 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 3599454 |
| | CA*F4961*6A* | G*VC951155DXA* | 56,500 | 41,800 | 14.0 | 12.0 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 3599619 |
| | CA*F4961*6A*+EEP | | 57,000 | 42,200 | 14.0 | 12.0 | 52,700 | 41,600 | 58,000 | 8.8 | 39,500 | 3069014 |

See Notes on Page 32.

AHRI PERFORMANCE RATINGS (CONT.)

| OUTDOOR UNIT | INDOOR UNITS | | COOLING CAPACITY (BTU/H) | | | | TVA RATINGS ³ | | HEATING CAPACITY | | | AHRI # |
|----------------------------|----------------------|----------------|--------------------------|--------|-------------------|------------------|--------------------------|--------|------------------|-------------------|--------|---------|
| | COILS & AIR HANDLERS | FURNACE/BLOWER | TOTAL | SENS. | SEER ¹ | EER ² | TOTAL | SENS. | HIGH | HSPF ⁴ | LOW | |
| SSZ14 0601A* (cont.) | CA*F4961*6A*+EEP+TXV | | 57,000 | 42,200 | 14.0 | 12.0 | 52,700 | 41,600 | 58,000 | 8.8 | 39,500 | 1347229 |
| | CA*F4961*6A* | MBE2000**-1 | 56,500 | 41,800 | 15.0 | 12.5 | 52,300 | 41,300 | 57,000 | 9.0 | 33,000 | 3069015 |
| | CA*F4961*6A*+TXV | MBE2000**-1 | 56,500 | 41,800 | 15.0 | 12.5 | 52,300 | 41,300 | 57,000 | 9.0 | 33,000 | 1346781 |
| | CA*F4961*6A* | MBR2000**-1 | 56,500 | 41,800 | 14.0 | 12.0 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 3069016 |
| | CA*F4961*6A*+TXV | MBR2000**-1 | 56,500 | 41,800 | 14.0 | 12.0 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 1347184 |
| | CA*F4961*6A* | MBVC2000**-1A* | 56,500 | 41,800 | 15.0 | 12.5 | 52,300 | 41,300 | 57,000 | 9.0 | 33,000 | 3609981 |
| | CA*F4961*6A*+TXV | MBVC2000**-1A* | 56,500 | 41,800 | 15.0 | 12.5 | 52,300 | 41,300 | 57,000 | 9.0 | 33,000 | 3609996 |
| | CA*F4961*6A*+TXV | G*V950905D** | 56,500 | 41,800 | 14.0 | 12.0 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 1346782 |
| | CA*F4961*6A*+TXV | G*V951155D** | 56,500 | 41,800 | 14.0 | 12.0 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 1346783 |
| | CA*F4961*6A*+TXV | G*VC950905DXA* | 56,500 | 41,800 | 14.0 | 12.0 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 3599452 |
| | CA*F4961*6A*+TXV | G*VC951155DXA* | 56,500 | 41,800 | 14.0 | 12.0 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 3599617 |
| | CHPF4860D6C* | G*V950905D** | 56,500 | 41,800 | 14.0 | 11.5 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 3069028 |
| | CHPF4860D6C* | G*V951155D** | 56,500 | 41,800 | 14.0 | 11.5 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 3069029 |
| | CHPF4860D6C* | G*VC950905DXA* | 56,500 | 41,800 | 14.0 | 11.5 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 3599455 |
| | CHPF4860D6C* | G*VC951155DXA* | 56,500 | 41,800 | 14.0 | 11.5 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 3599613 |
| | CHPF4860D6C*+EEP | | 57,000 | 42,200 | 14.0 | 12.0 | 52,700 | 41,600 | 58,000 | 8.8 | 39,500 | 3069025 |
| | CHPF4860D6C*+EEP+TXV | | 57,000 | 42,200 | 14.0 | 12.0 | 52,700 | 41,600 | 58,000 | 8.8 | 39,500 | 1330372 |
| | CHPF4860D6C* | MBE2000**-1A* | 56,500 | 41,800 | 15.0 | 12.5 | 52,300 | 41,300 | 57,000 | 9.0 | 33,000 | 3069026 |
| | CHPF4860D6C*+TXV | MBE2000**-1A* | 56,500 | 41,800 | 15.0 | 12.5 | 52,300 | 41,300 | 57,000 | 9.0 | 33,000 | 1330371 |
| | CHPF4860D6C* | MBR2000**-1A* | 57,000 | 42,200 | 14.0 | 12.0 | 52,700 | 41,600 | 57,000 | 8.8 | 38,000 | 3069027 |
| | CHPF4860D6C*+TXV | MBR2000**-1A* | 57,000 | 42,200 | 14.0 | 12.0 | 52,700 | 41,600 | 57,000 | 8.8 | 38,000 | 1330373 |
| | CHPF4860D6C*+TXV | G*V950905D** | 56,500 | 41,800 | 14.0 | 11.5 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 1330436 |
| | CHPF4860D6C*+TXV | G*V951155D** | 56,500 | 41,800 | 14.0 | 11.5 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 1330437 |
| | CHPF4860D6C*+TXV | G*VC950905DXA* | 56,500 | 41,800 | 14.0 | 11.5 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 3599451 |
| | CHPF4860D6C*+TXV | G*VC951155DXA* | 56,500 | 41,800 | 14.0 | 11.5 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 3599612 |
| | CHPF4860D6D* | G*V950905D** | 56,500 | 41,800 | 14.0 | 11.5 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 3300397 |
| | CHPF4860D6D* | G*V951155D** | 56,500 | 41,800 | 14.0 | 11.5 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 3300398 |
| | CHPF4860D6D* | G*VC950905DXA* | 56,500 | 41,800 | 14.0 | 11.5 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 3599457 |
| | CHPF4860D6D* | G*VC951155DXA* | 56,500 | 41,800 | 14.0 | 11.5 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 3599615 |
| | CHPF4860D6D*+EEP | | 57,000 | 42,200 | 14.0 | 12.0 | 52,700 | 41,600 | 58,000 | 8.8 | 39,500 | 3300399 |
| | CHPF4860D6D*+EEP+TXV | | 57,000 | 42,200 | 14.0 | 12.0 | 52,700 | 41,600 | 58,000 | 8.8 | 39,500 | 3300400 |
| | CHPF4860D6D* | MBE2000**-1B* | 56,500 | 41,800 | 15.0 | 12.5 | 52,300 | 41,300 | 57,000 | 9.0 | 33,000 | 3300401 |
| | CHPF4860D6D*+TXV | MBE2000**-1B* | 56,500 | 41,800 | 15.0 | 12.5 | 52,300 | 41,300 | 57,000 | 9.0 | 33,000 | 3300402 |
| | CHPF4860D6D* | MBR2000**-1 | 57,000 | 42,200 | 14.0 | 12.0 | 52,700 | 41,600 | 57,000 | 8.8 | 38,000 | 3300403 |
| | CHPF4860D6D*+TXV | MBR2000**-1 | 57,000 | 42,200 | 14.0 | 12.0 | 52,700 | 41,600 | 57,000 | 8.8 | 38,000 | 3300404 |
| | CHPF4860D6D* | MBR2000**-1A* | 57,000 | 42,200 | 14.0 | 12.0 | 52,700 | 41,600 | 57,000 | 8.8 | 38,000 | 3300405 |
| | CHPF4860D6D* | MBVC2000**-1A* | 56,500 | 41,800 | 15.0 | 12.5 | 52,300 | 41,300 | 57,000 | 9.0 | 33,000 | 3610041 |
| | CHPF4860D6D*+TXV | MBVC2000**-1A* | 56,500 | 41,800 | 15.0 | 12.5 | 52,300 | 41,300 | 57,000 | 9.0 | 33,000 | 3610057 |
| | CHPF4860D6D*+TXV | G*V950905D** | 56,500 | 41,800 | 14.0 | 11.5 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 3300406 |
| | CHPF4860D6D*+TXV | G*V951155D** | 56,500 | 41,800 | 14.0 | 11.5 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 3300407 |
| | CHPF4860D6D*+TXV | G*VC950905DXA* | 56,500 | 41,800 | 14.0 | 11.5 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 3599458 |
| | CHPF4860D6D*+TXV | G*VC951155DXA* | 56,500 | 41,800 | 14.0 | 11.5 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 3599616 |
| | CSCF4860N6C* | G*V90905D** | 56,500 | 41,800 | 14.0 | 11.5 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 3069032 |
| | CSCF4860N6C* | G*V951155D** | 56,500 | 41,800 | 13.5 | 11.5 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 3069033 |
| | CSCF4860N6C* | G*VC90905DXA* | 56,500 | 41,800 | 14.0 | 11.5 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 3599117 |

¹ Seasonal Energy Efficiency Ratio; Certified per AHRI 210/240 @ 80°F/ 67°F/ 95°F

² Energy Efficiency Ratio @ 80°F/ 67°F/ 95°F

³ TVA Rating: BTU/h @ 75°F/ 63°F - 95°F

⁴ HSPF = Heating Seasonal Performance Factor


NOTES:

- Always check the S&R plate for electrical data on the unit being installed.
- When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay

AHRI PERFORMANCE RATINGS (CONT.)


| OUTDOOR UNIT | INDOOR UNITS | | COOLING CAPACITY (BTU/H) | | | | TVA RATINGS ³ | | HEATING CAPACITY | | | AHRI # |
|----------------------------|----------------------|----------------|--------------------------|--------|-------------------|------------------|--------------------------|--------|------------------|-------------------|--------|---------|
| | COILS & AIR HANDLERS | FURNACE/BLOWER | TOTAL | SENS. | SEER ¹ | EER ² | TOTAL | SENS. | HIGH | HSPF ⁴ | LOW | |
| SSZ14 0601A* (cont.) | CSCF4860N6C* | G*VC951155DXA* | 56,500 | 41,800 | 13.5 | 11.5 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 3599614 |
| | CSCF4860N6C*+TXV | G*V90905D** | 56,500 | 41,800 | 14.0 | 11.5 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 1296669 |
| | CSCF4860N6C*+TXV | G*V951155D** | 56,500 | 41,800 | 13.5 | 11.5 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 1296670 |
| | CSCF4860N6C*+TXV | G*VC90905DXA* | 56,500 | 41,800 | 14.0 | 11.5 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 3599116 |
| | CSCF4860N6C*+TXV | G*VC951155DXA* | 56,500 | 41,800 | 13.5 | 11.5 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 3599611 |
| | CT*F4860*6A* | G*V950905D** | 56,500 | 41,800 | 14.0 | 12.0 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 3069036 |
| | CT*F4860*6A* | G*V951155D** | 56,500 | 41,800 | 14.0 | 12.0 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 3069037 |
| | CT*F4860*6A* | G*VC950905DXA* | 56,500 | 41,800 | 14.0 | 12.0 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 3599456 |
| | CT*F4860*6A* | G*VC951155DXA* | 56,500 | 41,800 | 14.0 | 12.0 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 3599620 |
| | CT*F4860*6A* | MBE2000**-1 | 56,500 | 41,800 | 15.0 | 12.5 | 52,300 | 41,300 | 57,000 | 9.0 | 33,000 | 3069034 |
| | CT*F4860*6A*+TXV | MBE2000**-1 | 56,500 | 41,800 | 15.0 | 12.5 | 52,300 | 41,300 | 57,000 | 9.0 | 33,000 | 1450127 |
| | CT*F4860*6A* | MBR2000**-1 | 56,500 | 41,800 | 14.0 | 12.0 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 3069035 |
| | CT*F4860*6A*+TXV | MBR2000**-1 | 56,500 | 41,800 | 14.0 | 12.0 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 1450128 |
| | CT*F4860*6A* | MBVC2000**-1A* | 56,500 | 41,800 | 15.0 | 12.5 | 52,300 | 41,300 | 57,000 | 9.0 | 33,000 | 3610134 |
| | CT*F4860*6A*+TXV | MBVC2000**-1A* | 56,500 | 41,800 | 15.0 | 12.5 | 52,300 | 41,300 | 57,000 | 9.0 | 33,000 | 3610155 |
| | CT*F4860*6A*+TXV | G*V950905D** | 56,500 | 41,800 | 14.0 | 12.0 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 1450129 |
| | CT*F4860*6A*+TXV | G*V951155D** | 56,500 | 41,800 | 14.0 | 12.0 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 1450130 |
| | CT*F4860*6A*+TXV | G*VC950905DXA* | 56,500 | 41,800 | 14.0 | 12.0 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 3599453 |
| | CT*F4860*6A*+TXV | G*VC951155DXA* | 56,500 | 41,800 | 14.0 | 12.0 | 52,300 | 41,300 | 57,000 | 8.5 | 33,000 | 3599618 |

DIMENSIONS

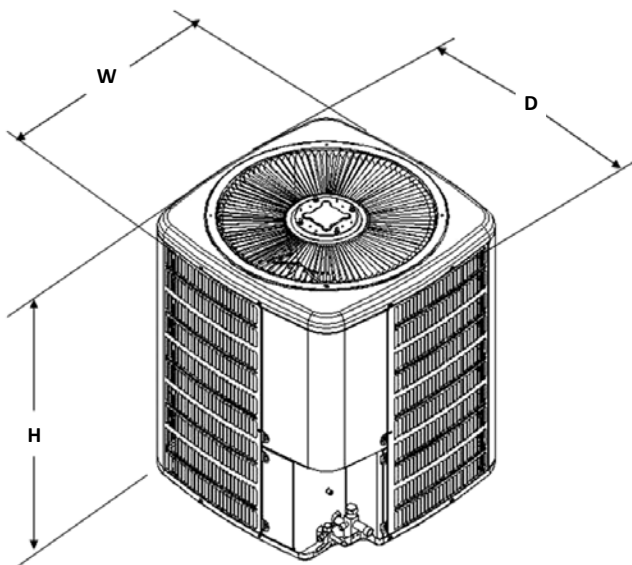

| MODEL | DIMENSIONS | | |
|------------|------------|-----|-----|
| | W" | D" | H" |
| SSZ140181A | 29 | 29 | 34¾ |
| SSZ140241A | 29 | 29 | 38¾ |
| SSZ140301A | 29 | 29 | 38¾ |
| SSZ140361A | 35½ | 35¼ | 38¾ |
| SSZ140361B | 29 | 29 | 38¾ |
| SSZ140421A | 35½ | 35½ | 38¾ |
| SSZ140481A | 35½ | 35½ | 38¾ |
| SSZ140601A | 35½ | 35½ | 38¾ |

WIRING DIAGRAM — SSZ14018/30/42-601AA-AE, 241AA-AH, 361AA-AG

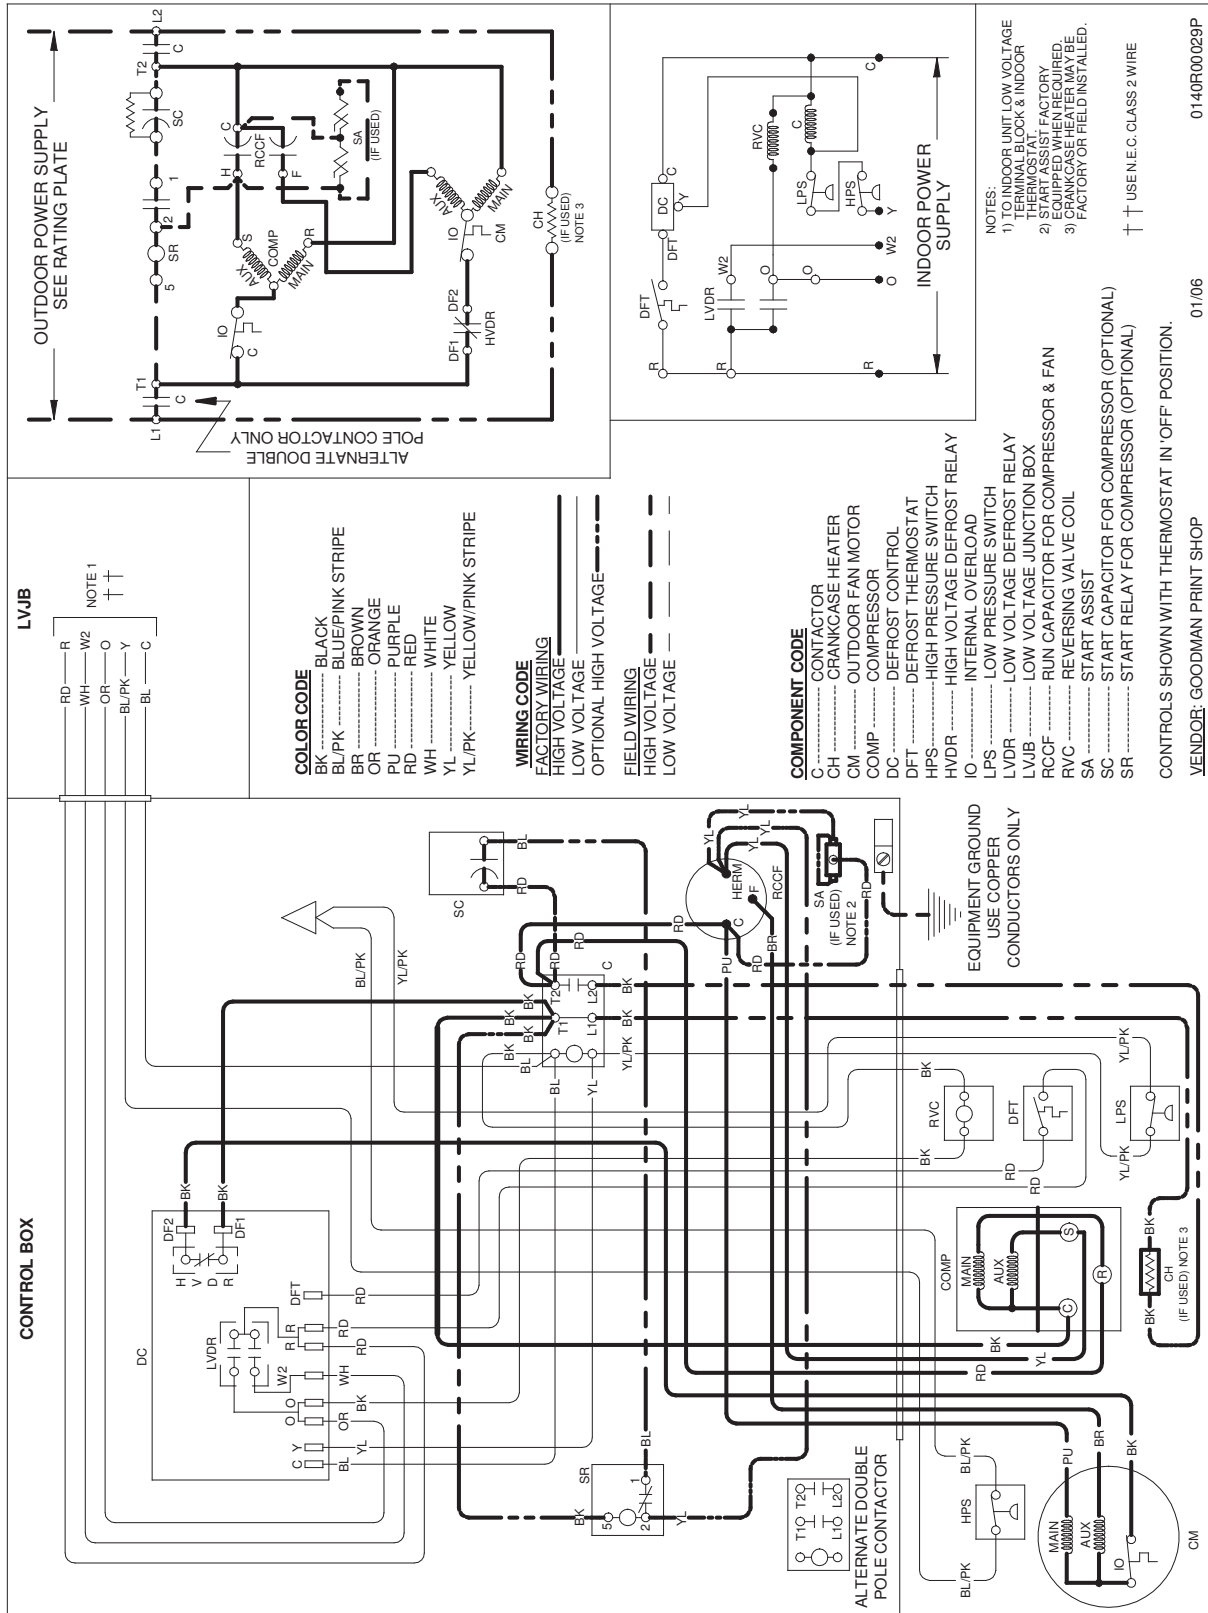


WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

WIRING DIAGRAM—SSZ14018/30/42-601AF, 241AJ, 361AH, 361B*

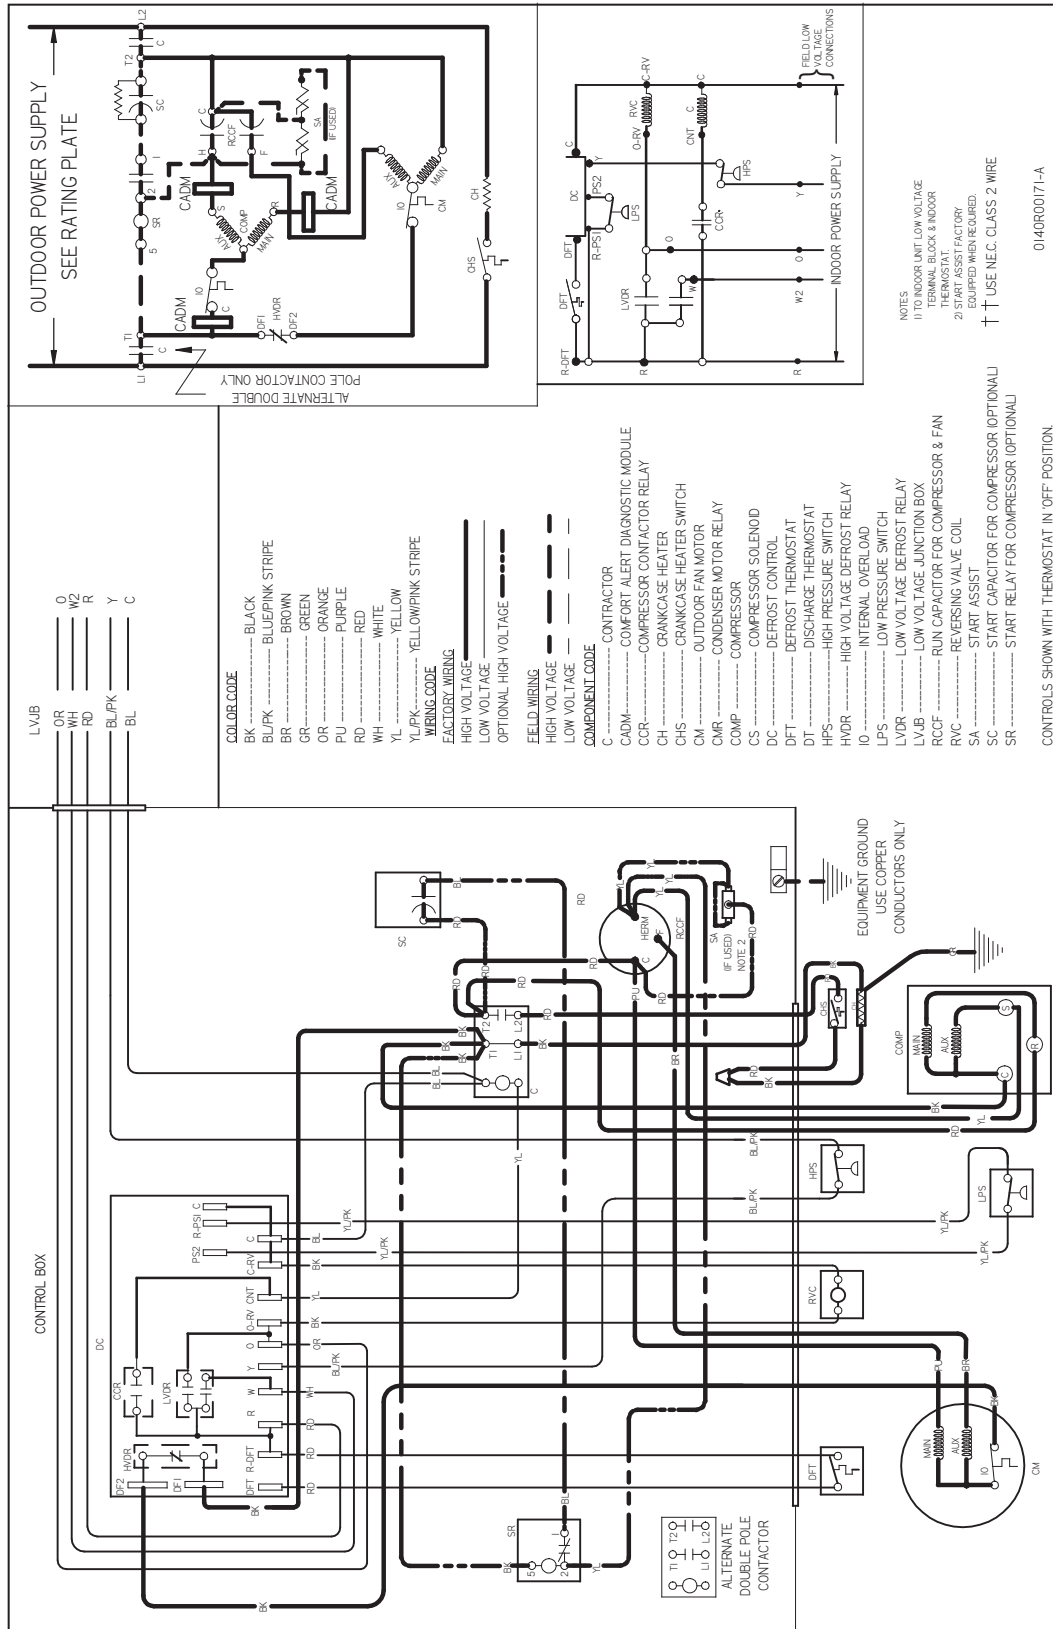

WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.

ACCESSORIES

| MODEL | DESCRIPTION | SSZ14 0181A | SSZ14 0241A | SSZ14 0301A | SSZ14 0361A | SSZ14 0361B | SSZ14 0421A | SSZ14 0481A | SSZ14 0601A |
|-----------------------|------------------------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
| ABK-20 | Anchor Bracket Kit * | X | X | X | X | X | X | X | X |
| AFE18-60A | All-fuel Kit | X | X | X | X | X | X | X | X |
| ASC-01 | Anti-Short Cycle Kit | X | X | X | X | X | X | X | X |
| CSR-U-1 | Hard-start Kit | X | X | X | X | X | | | |
| CSR-U-2 | Hard-start Kit | | | | X | X | X | X | X |
| CSR-U-3 | Hard-start Kit | | | | | | | X | X |
| FSK01A ¹ | Freeze Protection Kit | X | X | X | X | X | X | X | X |
| OT/EHR18-60 | Emergency Heat Relay kit | X | X | X | X | X | X | X | X |
| OT18-60A ² | Outdoor Thermostat w/ Lockout Stat | X | X | X | X | X | X | X | X |
| TX2N4 ³ | TXV Kit | X | | | | | | | |
| TX2N4A ³ | TXV Kit | X | X | | | | | | |
| TX3N4 ³ | TXV Kit | | | X | X | X | | | |
| TX5N4 ³ | TXV Kit | | | | | | X | X | X |

* Contains 20 brackets; four brackets needed to anchor unit to pad

¹ Installed on indoor coil

² Required for heat pump applications where ambient temperatures fall below 0 °F with 50% or higher relative humidity.

³ Condensing units and heat pumps with reciprocating compressors require the use of start-assist components when used in conjunction with an indoor coil using a non-bleed thermal expansion valve refrigerant metering device. The TXV should always be sized based on the tonnage of the outdoor unit.

